



FORCELAND TYRE CO., LTD

Building A47, No.20, Jin Shan Gu, Chuangyi 10th Street,
No.139 Dongyi Road, Panyu District, Guangzhou, China.

E-mail: info@forcelandtyre.com
www.forcelandtyre.com




**LET'S GO
FURTHER**

GERMAN W-SILENT TECHNOLOGY

 **FORCELAND®**

German W-Silent Technology can effectively reduce the noise generated by resonance of the tyre cavity. It can reduce the noise by up to 8-9 dB at the frequency range of 200-250Hz, and around 1-5 dB lower under other frequency ranges.

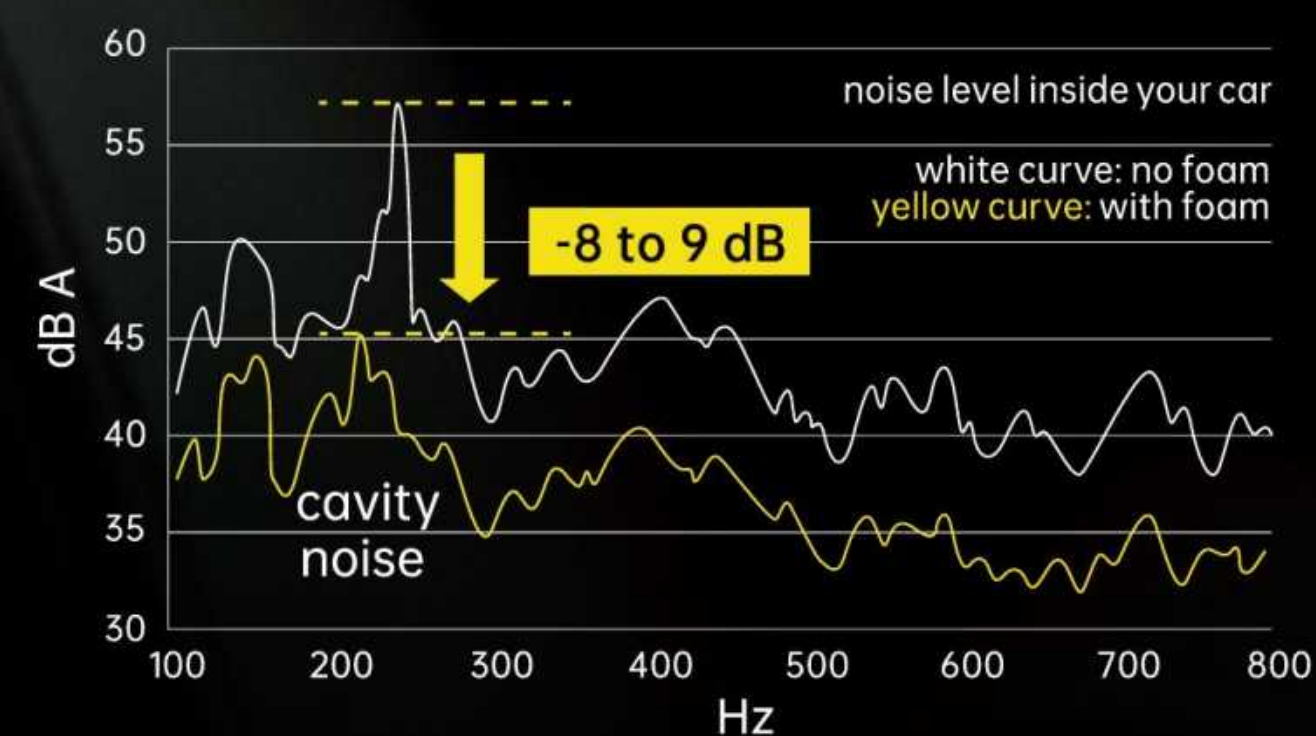

VITALITY F22 EV W-SILENT SIZES COVER



VITALITY F22 EV

 TESLA	TYRE SIZE
Model 3	235/45ZR18
	235/40ZR19
	235/35ZR20
	245/35ZR20
	275/35ZR19
	275/30ZR20

 TESLA	TYRE SIZE
Model S	245/45ZR19
	245/40ZR20
	245/35ZR21
	255/45ZR19
	265/35ZR21
	295/30ZR21

 TESLA	TYRE SIZE
Model Y	255/45ZR19
	235/55R18
	255/40ZR20
	255/35ZR21
	275/35ZR21

 TESLA	TYRE SIZE
Model X	265/50ZR19
	255/45ZR20
	265/45ZR20
	275/45ZR20
	265/35ZR22
	285/35ZR22

100% TESLA
MODELS

90%+ for Porsche, BMW, Mercedes-Benz, VW, Kia, Volvo, Audi, Peugeot, BYD, Geely, MG and others.



TYRE SIZES FOR SOME EVS



VEHICLE MODEL	FRONT	REAR
Mercedes EQA	235/55R18	235/55R18
Mercedes EQB	235/55R18	235/55R18
Mercedes EQE	235/55ZR19	235/55ZR19
Mercedes EQS	255/45ZR20	255/45ZR20
Mercedes EQV	245/50ZR18	245/50ZR18



VEHICLE MODEL	FRONT	REAR
EX30	225/55R18	225/55R18
EX40	235/50ZR19	255/45ZR19
XC40 Recharge	235/50ZR19	255/45R19



VEHICLE MODEL	FRONT	REAR
Volkswagen ID.3	215/55R18	215/55R18
Volkswagen ID.4	235/55ZR19	255/45ZR19
Volkswagen ID.5	235/50ZR20	255/45ZR20
Volkswagen ID.7	235/55R18	235/55R18



VEHICLE MODEL	FRONT	REAR
Enyaq iV 50	235/50ZR19	235/50ZR19
Enyaq iV 80X	235/55ZR19	235/55ZR19
Enyaq iV 85	235/55ZR19	235/55ZR19
Enyaq Coupe iV 80X	235/55ZR19	255/50ZR19
Enyaq Sportline 85	235/50ZR19	235/50ZR19
Enyaq Coupe iV vRS	235/50ZR20	235/50ZR20



VEHICLE MODEL	FRONT	REAR
BMW iX	255/50ZR21	255/50ZR21
BMW iX1	225/55R18	225/55R18
BMW iX2	245/45ZR19	245/45ZR19
BMW iX3	245/45ZR20	245/45ZR20
BMW i4	245/40ZR19	255/40ZR19
BMW i5	245/45ZR19	245/45ZR19



VEHICLE MODEL	FRONT	REAR
SEAGULL	225/50ZR18	225/50ZR18
E2	205/60R16	205/60R16
E3	205/60R16	205/60R16
QIN	205/55R16	205/55R16
HAN	245/45ZR19	245/45ZR19
YUAN PRO	205/60R16	205/60R16
SONG PLUS	235/50ZR19	235/50ZR19
SONG PRO	225/60R18	225/60R18
YUAN PLUS	215/55R18	215/55R18
TANG	255/50ZR20	255/50ZR20
SONG MAX	225/55ZR17	225/55ZR17



VEHICLE MODEL	FRONT	REAR
MG4	215/50ZR17	215/50ZR17
MG5 Electric	215/50ZR17	215/50ZR17



SIZE RANGE FOR EVS

17”	▲ 215/50ZR17	▲ 215/55ZR17	▲ 225/45ZR17	▲ 225/50ZR17	25/55ZR17	235/45ZR17	235/50ZR17	235/55ZR17
	245/45ZR17	225/65R17	235/65R17					
18”	235/60R18	255/55R18	245/50ZR18	275/45ZR18	215/45ZR18	245/40ZR18	225/45ZR18	255/40ZR18
	▲ 245/45ZR18	275/40ZR18	▲ 225/40ZR18	255/35ZR18	235/40ZR18	265/35ZR18	245/40ZR18	275/35ZR18
19”	235/55ZR19	255/50ZR19	235/50ZR19	255/45ZR19	225/45ZR19	245/40ZR19	255/40ZR19	245/45ZR19
	275/40ZR19	245/40ZR19	275/35ZR19	225/35ZR19	255/30ZR19	235/35ZR19	265/35ZR19	265/30ZR19
	295/30ZR19	305/30ZR19	245/35ZR19	275/30ZR19	255/35ZR19	285/30ZR19		
20”	235/50ZR20	255/45ZR20	265/45ZR20	255/45ZR20	275/45ZR20	255/50ZR20	285/45ZR20	▲ 245/45ZR20
	▲ 275/40ZR20	285/40ZR20	275/40ZR20	315/35ZR20	265/45ZR20	285/40ZR20	295/40ZR20	▲ 225/35ZR20
	255/30ZR20	235/35ZR20	265/30ZR20	▲ 245/35ZR20	275/30ZR20	285/35ZR20	295/30ZR20	305/30ZR20
	245/40ZR20	275/35ZR20	285/35ZR20	255/35ZR20	295/35ZR20	295/30ZR20	255/40ZR20	295/35ZR20
21”	265/45ZR21	295/40ZR21	275/45ZR21	315/40ZR21	255/40ZR21	285/35ZR21	265/40ZR21	295/35ZR21
	285/40ZR21	315/35ZR21	245/35ZR21	265/35ZR21	285/30ZR21	255/35ZR21	275/35ZR21	265/35ZR21
	295/30ZR21	305/30ZR21	275/35ZR21	315/30ZR21	285/35ZR21	325/30ZR21		
22”	265/35ZR22	285/35ZR22	275/35ZR22	315/30ZR22	275/40ZR22	315/35ZR22	285/40ZR22	325/35ZR22
	285/45ZR22	325/40ZR22	245/30ZR22	265/40ZR22	295/40ZR22			

“▲” Produced in China and Thailand

PCR / VAN



VITALITY F22

VINTEK F35

VITALITY H/T

 **FORCELAND®**



VITALITY F22

- ◆ LUXURY & COMFORT
- ◆ ASYMMETRIC UHP TREAD PATTERN DESIGN
- ◆ ADVANCED SILICA & FUEL-ECO COMPOUND
- ◆ COMPUTER OPTIMIZED PITCHES FOR NOISE REDUCTION
- ◆ EXCELLENT PERFORMANCE ON WET & DRY ROADS
- ◆ PRECISE CONTROL WITH HIGH SPEED CONFIDENCE

VITALITY F22



INCH	SIZE	LI/SS	RIM WIDTH Inch	TREAD DEPTH mm	MAX LOAD kg	MAX INFL PRESSURE kpa
13	175/70R13	82T	5.0J	7.3	475	300
14	165/55R14	72H	5.0J	6.5	355	300
	165/60R14	75H	5.0J	7.3	387	300
	185/60R14	82H	5.5J	7.3	475	300
	155/65R14	75T	5.0J	7.3	387	300
	165/65R14	79T	5.0J	7.3	437	300
	175/65R14	82H	5.0J	7.3	475	300
	185/65R14	86H	5.5J	7.3	530	300
	165/70R14	81T	5.0J	7.3	462	300
	175/70R14	84T	5.0J	7.3	500	300
	185/70R14	88T	5.5J	7.3	560	300
	195/70R14	91H	6.0J	7.5	615	300
15	165/50R15	76V XL	5.0J	6.5	400	350
	195/50R15	82V	6.0J	7.3	475	300
	165/55R15	75H	5.0J	6.5	387	300
	185/55RT5	82V	6.0J	7.3	475	300
	195/55R15	85V	6.0J	7.3	515	300
	185/60R15	84H	5.5J	7.7	500	300
	195/60R15	88V	6.0J	7.7	560	300
	175/65R15	84H	5.0J	7.3	500	300
	185/65R15	88H	5.5J	7.3	560	300
	195/65R15	91V	6.0J	7.3	615	300
	205/65R15	94V	6.0J	7.7	670	300
16	215/40ZR16	86W XL	7.5J	7.7	530	350
	165/45R16	84V XL	5.5J	6.5	500	350
	195/45R16	87V XL	6.5J	7.7	500	350
	205/45ZR16	86W XL	7.0J	7.7	545	350
	165/50R16	77V XL	5.0J	6.5	412	350
	185/50R16	81V	6.0J	7.3	462	300
	195/50R16	88V XL	6.0J	7.7	560	350
	205/50R16	87V	6.5J	7.7	545	300
	185/55R16	83V	6.0J	7.3	487	300

INCH	SIZE	LI/SS	RIM WIDTH Inch	TREAD DEPTH mm	MAX LOAD kg	MAX INFL PRESSURE kpa
16	195/55R16	87V	6.0J	7.3	545	300
	205/55R16	91V	6.5J	7.3	615	300
	205/55R16	94V XL	6.5J	7.3	670	350
	215/55ZR16	97W XL	7.0J	7.3	730	350
	225/55ZR16	95W	7.0J	7.7	690	300
	205/60R16	92H	6.0J	7.7	630	300
	215/60R16	95H	6.5J	7.7	690	300
	215/60R16	99V XL	6.5J	7.7	775	350
	* 195/65R16	92H	6.5J	7.7	630	300
	205/65R16	95H	6.0J	7.5	690	300
17	195/40ZR17	81W XL	7.0J	7.5	462	350
	205/40ZR17	84W XL	7.5J	7.7	500	350
	215/40ZR17	87W XL	7.5J	7.7	545	350
	255/40ZR17	98W XL	9.0J	7.7	750	350
	245/40ZR17	95W XL	7.5J	7.5	690	350
	195/45ZR17	85W XL	6.5J	7.7	515	350
	205/45ZR17	88W XL	7.0J	7.7	560	350
	215/45ZR17	91W XL	7.0J	7.7	615	350
	225/45ZR17	94Y XL	7.5J	7.7	670	350
	235/45ZR17	97W XL	8.0J	7.7	730	350
	245/45ZR17	99W XL	8.0J	7.7	775	350
	255/45ZR17	102W XL	8.5J	7.7	850	350
	205/50ZR17	93W XL	6.5J	7.7	650	350
	215/50ZR17	95W XL	7.0J	7.7	690	350
	225/50ZR17	98W XL	7.0J	7.7	750	350
	235/50ZR17	96W	7.5J	7.7	710	300
	205/55ZR17	95W XL	6.5J	7.7	690	350
	215/55ZR17	98W XL	7.0J	7.7	750	350
	225/55ZR17	101W XL	7.0J	7.7	825	350
	235/55ZR17	103W XL	7.5J	7.7	875	350
18	215/60R17	96V	6.5J	7.7	710	300
	* 245/35ZR18	92W XL	8.5J	7.7	630	350

Size with "*" is under development and will be available soon. Data can be changed by manufacturer without prior notice.

VITALITY F22



INCH	SIZE	LI/SS	RIM WIDTH Inch	TREAD DEPTH mm	MAX LOAD kg	MAX INFL PRESSURE kpa
18	* 255/35ZR18	94W XL	9.0J	7.7	670	350
	265/35ZR18	97W XL	9.5J	7.7	730	350
	* 275/35ZR18	99W XL	9.5J	7.7	775	350
	* 285/35ZR18	101W XL	10.0J	7.7	825	350
	215/40ZR18	89W XL	7.5J	7.7	580	350
	225/40ZR18	92Y XL	8.0J	7.7	630	350
	235/40ZR18	95W XL	8.5J	7.7	690	350
	245/40ZR18	97W XL	8.5J	7.7	730	350
	* 265/40ZR18	101W XL	9.5J	7.7	825	350
	* 275/40ZR18	103W XL	9.5J	7.7	875	350
	215/45ZR18	93W XL	7.0J	7.7	650	350
	225/45ZR18	95W XL	7.5J	7.7	690	350
	235/45ZR18	98W XL	8.0J	7.7	750	350
	245/45ZR18	100Y XL	8.0J	7.7	800	350
	* 255/45ZR18	103W XL	8.5J	7.7	875	350
	* 275/45ZR18	107W XL	9.0J	7.7	975	350
	225/50ZR18	95W	7.0J	7.7	690	300
	235/50ZR18	101W XL	7.5J	7.7	825	350
	* 245/50ZR18	104W XL	7.5J	7.7	900	350
	215/55R18	95V	7.0J	7.7	690	300
	225/55R18	98V	7.0J	7.7	750	300
	235/55R18	104V XL	7.5J	7.7	900	350
	* 255/55R18	109V XL	8.0J	7.7	1030	350
	* 235/60R18	107V XL	7.0J	7.7	975	350
19	255/30ZR19	91W XL	9.0J	7.5	615	350
	* 265/30ZR19	93W XL	9.5J	7.7	650	350
	275/30ZR19	96Y XL	9.5J	7.7	710	350
	215/35ZR19	85W XL	7.5J	7.7	515	350
	225/35ZR19	88W XL	8.0J	7.7	560	350
	235/35ZR19	91W XL	8.5J	7.7	615	350
	245/35ZR19	93W XL	8.5J	7.7	650	350
	255/35ZR19	96W XL	9.0J	7.7	710	350

INCH	SIZE	LI/SS	RIM WIDTH Inch	TREAD DEPTH mm	MAX LOAD kg	MAX INFL PRESSURE kpa
19	* 265/35ZR19	98Y XL	9.5J	7.7	750	350
	275/35ZR19	100W XL	9.5J	7.7	800	350
	225/40ZR19	93W XL	8.0J	7.7	650	350
	235/40ZR19	96W XL	8.5J	7.7	710	350
	245/40ZR19	98W XL	8.5J	7.7	750	350
	255/40ZR19	100W XL	9.0J	7.7	800	350
	* 265/40ZR19	102W XL	9.5J	7.7	850	350
	275/40ZR19	105W XL	9.5J	7.7	925	350
	285/40ZR19	107Y XL	10.0J	7.5	975	350
	225/45ZR19	96W XL	7.5J	7.7	710	350
	235/45ZR19	99W XL	8.0J	7.7	775	350
	245/45ZR19	102W XL	8.0J	7.7	850	350
	255/45ZR19	104Y XL	8.5J	7.7	900	350
	* 275/45ZR19	108W XL	9.0J	7.7	1000	350
	235/50ZR19	103W XL	7.5J	7.7	875	350
	245/50ZR19	105W XL	7.5J	7.5	925	350
	* 255/50R19	107W XL	8.0J	7.7	975	350
	225/55R19	99V	7.0J	7.7	775	300
	235/55ZR19	105W XL	7.5J	7.7	925	350
	* 245/55ZR19	103W	7.5J	7.7	875	300
	255/55ZR19	111W XL	8.0J	7.7	1090	350
	* 275/55ZR19	111W	8.5J	7.7	1090	300
20	245/30ZR20	95W XL	8.5J	7.7	690	350
	255/30ZR20	92W XL	9.0J	7.7	630	350
	275/30ZR20	97W XL	9.5J	7.7	730	350
	305/30ZR20	103Y XL	11.0J	7.5	875	350
	225/35ZR20	93W XL	8.0J	7.7	650	350
	235/35ZR20	92Y XL	8.5J	7.5	630	350
	245/35ZR20	95W XL	8.5J	7.7	690	350
	255/35ZR20	102W XL	9.0J	7.7	850	350
	* 265/35ZR20	99W XL	9.5J	7.7	775	350
	275/35ZR20	102W XL	9.5J	7.7	850	350

VITALITY F22



INCH	SIZE	LI/SS	RIM WIDTH Inch	TREAD DEPTH mm	MAX LOAD kg	MAX INFL PRESSURE kpa
20	285/35ZR20	104Y XL	10.0J	7.5	900	350
	315/35ZR20	110W XL	11.0J	7.5	1060	350
	245/40ZR20	99W XL	8.5J	7.7	775	350
	255/40ZR20	101Y XL	9.0J	7.7	825	350
	265/40ZR20	104Y XL	9.5J	7.7	900	350
	275/40ZR20	106W XL	9.5J	7.7	950	350
	285/40ZR20	108W XL	10.0J	7.5	1000	350
	295/40ZR20	110Y XL	10.5J	7.5	1060	350
	215/45ZR20	95W XL	7.0J	7.5	690	350
	235/45ZR20	100W XL	8.0J	7.7	800	350
	245/45ZR20	103W XL	8.0J	7.7	875	350
	255/45ZR20	105W XL	8.5J	7.7	925	350
	265/45ZR20	108W XL	9.0J	7.7	1000	350
	275/45ZR20	110W XL	9.0J	7.7	1060	350
	285/45ZR20	112W XL	9.5J	7.7	1120	350
	235/50ZR20	104W XL	7.5J	7.7	900	350
	245/50ZR20	105W XL	7.5J	7.7	925	350
	255/50ZR20	109W XL	8.0J	7.7	1030	350
	275/50ZR20	113W XL	8.5J	7.7	1150	350
	235/55ZR20	105W XL	7.5J	7.7	925	350
21	* 255/55ZR20	110W XL	8.0J	7.7	1060	350
	* 275/30ZR21	98W XL	9.5J	7.7	750	350
	285/30ZR21	100Y XL	10.0J	7.7	800	350
	305/30ZR21	104Y XL	11.0J	7.7	900	350
	315/30ZR21	105Y XL	11.0J	7.7	925	350
	325/30ZR21	108Y XL	11.5J	7.7	1000	350
	245/35ZR21	96Y XL	8.5J	7.7	710	350
	255/35ZR21	98Y XL	9.0J	7.7	750	350
	265/35ZR21	101Y XL	9.5J	7.7	825	350
	275/35ZR21	103Y XL	9.5J	7.7	875	350
	285/35ZR21	105Y XL	10.0J	7.7	925	350
	295/35ZR21	107Y XL	10.5J	7.7	975	350

INCH	SIZE	LI/SS	RIM WIDTH Inch	TREAD DEPTH mm	MAX LOAD kg	MAX INFL PRESSURE kpa
21	315/35ZR21	111Y XL	11.0J	7.7	1090	350
	245/40ZR21	100Y XL	8.5J	7.7	800	350
	255/40ZR21	102Y XL	9.0J	7.7	850	350
	265/40ZR21	105Y XL	9.5J	7.7	925	350
	275/40ZR21	107Y XL	9.5J	7.7	975	350
	285/40ZR21	109W XL	10.0J	7.7	1030	350
	295/40ZR21	111W XL	10.5J	7.7	1090	350
	315/40ZR21	115Y XL	11.0J	7.5	1215	350
	235/45ZR21	101Y XL	8.0J	7.5	825	350
	265/45ZR21	108Y XL	9.0J	7.7	1000	350
	275/45ZR21	110Y XL	9.0J	7.7	1060	350
	285/45ZR21	113Y XL	9.5J	7.5	1150	350
	255/50ZR21	109W XL	8.0J	7.5	1030	350
	275/50ZR21	113W XL	8.5J	7.7	1150	350
22	245/30ZR22	92Y XL	8.5J	7.7	630	350
	* 265/30ZR22	97W XL	9.5J	7.7	730	350
	315/30ZR22	107Y XL	11.0J	7.5	975	350
	265/35ZR22	102Y XL	9.5J	7.7	850	350
	275/35ZR22	104Y XL	9.5J	7.5	900	350
	285/35ZR22	106Y XL	10.0J	7.7	950	350
	315/35ZR22	111Y XL	11.0J	7.5	1090	350
	325/35ZR22	114Y XL	11.5J	7.5	1180	350
	265/40ZR22	106Y XL	9.5J	7.7	950	350
	275/40ZR22	107Y XL	9.5J	7.7	975	350
	285/40ZR22	110Y XL	10.0J	7.7	1060	350
	295/40ZR22	112Y XL	10.5J	7.5	1120	350
	325/40ZR22	114Y	11.5J	7.5	1180	300
	* 275/45ZR22	112W XL	9.0J	7.7	1120	350
	285/45ZR22	114Y XL	9.5J	7.7	1180	350

Size with “*” is under development and will be available soon. Data can be changed by manufacturer without prior notice.

VINTEK F35

- ◆ 3 WIDE GROOVES DESIGNED FOR HIGHER WATER CLEARANCE ON WET ROADS
- ◆ OPTIMIZED VOID PITCH TO LOWER TREAD PATTERN NOISE
- ◆ HIGH RIGIDITY AND PROPER SHOULDER DESIGN TO RESIST UNEVEN WEAR
- ◆ ADVANCED RUBBER COMPOUND PROVIDES LONGER MILEAGE



VINTEK F35



INCH	SIZE	LI/SS	PLY	RIM WIDTH Inch	MAX LOAD kg	MAX INFL PRESSURE kpa
14	* 175/70R14C	95/93T	6/C	5.0J	690/650	375
	* 175/65R14C	90/88T	6/C	5.0J	600/560	375
	185R14C	102/100R	8/D	5.5J	850/800	450
	195R14C	106/104R	8/D	5.5J	950/900	450
15	195R15C	107/105R	8/D	5.5J	975/925	450
	* 195/65R15C	98/96T	6/C	6.0J	750/710	375
	215/65R15C	104/102T	6/C	6.5J	900/850	375
	195/70R15C	104/102R	8/D	6.0J	900/850	450
	205/70R15C	106/104T	8/D	6.0J	950/900	450
	215/70R15C	109/107R	8/D	6.5J	1030/975	450
16	225/70R15C	112/110T	8/D	6.5J	1120/1060	450
	* 195/60R16C	99/97H	6/C	6.0J	775/730	375
	* 215/60R16C	108/106T	8/D	6.5J	1000/950	475
	* 195/65R16C	100/98T	6/C	6.0J	800/750	375
	205/65R16C	107/105T	8/D	6.0J	975/925	475
	215/65R16C	109/107T	8/D	6.5J	1030/975	475
	225/65R16C	112/110T	8/D	6.5J	1120/1060	475
	235/65R16C	115/113T	8/D	7.0J	1215/1150	475
	235/65R16C	121/119R	10/E	7.0J	1450/1360	575
	215/70R16C	108/106T	6/C	6.5J	1000/950	375
	195/75R16C	107/105R	8/D	5.5J	975/925	475
	215/75R16C	113/111R	8/D	6.0J	1150/1090	475
	225/75R16C	121/120T	10/E	6.0J	1450/1400	575

Size with “*” is under development and will be available soon. Data can be changed by manufacturer without prior notice.

VITALITY H/T

- ◆ DESIGN FOR URBAN CROSSOVER VEHICLE
- ◆ EXCELLENCE IN WET AND DRY CONDITIONS
- ◆ EXTRA GRIP ON HARD TURNS
- ◆ FUEL-ECO TREAD COMPOUND
- ◆ EXCELLENT HANDLING CONTROL



VITALITY H/T



INCH	SIZE	LI/SS	RIM WIDTH Inch	TREAD DEPTH mm	MAX LOAD kg	MAX INFL PRESSURE kpa
15	* 205/70R15	96H	6.0J	8.5	710	300
	* 235/75R15	109T XL	6.5J	8.5	1030	350
	* LT235/75R15 C	104/101S	6.5J	9.5	900/825	350
16	235/60R16	100H	7.0J	8.5	800	300
	215/65R16	98H	6.5J	8.5	750	300
	215/70R16	100H	6.5J	8.5	800	300
	225/70R16	103H	6.5J	8.5	875	300
	235/70R16	106H	7.0J	8.5	950	300
	245/70R16	111H XL	7.0J	8.5	1090	350
	255/70R16	111T	7.5J	8.5	1090	300
	265/70R16	112H	8.0J	8.5	1120	300
	275/70R16	114T	8.0J	8.5	1180	300
	* 245/75R16	111T	7.0J	8.5	1090	300
	* 265/75R16	116T	7.5J	8.5	1250	300
	* LT225/75R16 E	115/112S	6.0J	9.5	1215/1120	550
	* LT245/75R16 E	120/116S	7.0J	9.5	1380/1260	550
	* LT265/75R16 E	123/120S	7.5J	9.5	1550/1400	550
17	225/60R17	103V XL	6.5J	8.5	875	350
	235/60R17	102H	7.0J	8.5	850	300
	* 255/60R17	106H	7.5J	8.5	950	300
	225/65R17	102H	6.5J	8.5	850	300
	235/65R17	108H XL	7.0J	8.5	1000	350
	245/65R17	111H XL	7.0J	8.5	1090	350
	265/65R17	112H	8.0J	8.5	1120	300
	* 245/70R17	110T	7.0J	8.5	1060	300
	* 265/70R17	115T	8.0J	8.5	1215	300
	* LT245/75R17 E	121/118S	7.0J	9.5	1450/1320	550
18	* 255/55R18	109V XL	8.0J	8.5	1030	350
	225/60R18	104V XL	6.5J	8.5	900	350
	235/60R18	107V XL	7.0J	8.5	975	350
	245/60R18	105H	7.0J	8.5	925	300
	255/60R18	112V XL	7.5J	8.5	1120	350

INCH	SIZE	LI/SS	RIM WIDTH Inch	TREAD DEPTH mm	MAX LOAD kg	MAX INFL PRESSURE kpa
18	265/60R18	114V XL	8.0J	8.5	1180	350
	* 285/60R18	116H	8.5J	8.5	1250	300
	225/65R18	103H	6.5J	8.5	875	300
	235/65R18	106H	7.0J	8.5	950	300
	265/65R18	114H	8.0J	8.5	1180	300
	275/65R18	116H	8.0J	8.5	1250	300
	255/70R18	116H XL	7.5J	8.5	1250	350
19	* 265/70R18	116T	8.0J	8.5	1250	300
	* 265/50R19	110V XL	8.5J	8.5	1060	350
	245/55R19	107V XL	7.5J	8.5	975	350
	* 255/55R19	111V XL	8.0J	8.5	1090	350
	255/60R19	109H	7.5J	8.5	1030	300
20	* 245/50R20	102V	7.5J	8.5	850	300
	* 255/50R20	109V XL	8.0J	8.5	1030	350
	* 265/50R20	111V XL	8.5J	8.5	1090	350
	275/50R20	113V XL	8.5J	8.5	1150	350
	285/50R20	116V XL	9.0J	8.5	1250	350
	* 235/55R20	102V	7.5J	8.5	850	300
	255/55R20	110V XL	8.0J	8.5	1060	350
	275/55R20	117V XL	8.5J	8.5	1285	350
	275/60R20	116H XL	8.0J	8.5	1250	350

Size with “*” is under development and will be available soon. Data can be changed by manufacturer without prior notice.

4x4 LIGHT TRUCK SERIES

 **FORCELAND**®

REBEL HAWK R/T

REBEL HAWK A/T

REBEL HAWK M/T



REBEL HAWK R/T

- ◆ EACH TREAD BLOCK DESIGNED WITH COMPUTER OPTIMIZED SIPES, NOT ONLY OFFERS DRIVING COMFORT BY REDUCING TYRE NOISES, BUT ALSO PROVIDES GREAT GRIP PERFORMANCE ON WET SURFACE.
- ◆ CENTRAL TREAD CIRCUMFERENTIAL GROOVES PROVIDE EXCELLENT WET GRIP, WHILE OBLIQUE GROOVES INCREASE AQUAPLANING RESISTANCE.
- ◆ STONE EJECTOR PREVENTS DAMAGE TO GROOVE BOTTOM.
- ◆ PROVEN COMPOUND CONTRIBUTES TO LONGER MILEAGE, INCREASES CUT AND CHIPPING RESISTANCE.



REBEL HAWK R/T



55K WARRANTY **MUD SNOW**

INCH	SIZE	LI/SS	PLY	RIM WIDTH Inch	MAX LOAD kg	MAX INFL PRESSURE kpa
15	31X10.50R15LT	109Q	6/C	8.5J	1030	350
16	245/70R16	111S XL	/	7.0J	1090	350
	265/70R16	112S	/	8.0J	1120	300
	LT245/75R16	120/116R	10/E	7.0J	1380/1260	550
	* LT265/75R16	112/109Q	6/C	7.5J	1120/1030	350
	* LT285/75R16	126/123N	10/E	8.0J	1700/1550	550
	* LT265/70R16	117/114Q	8/D	8.0J	1285/1180	450
17	265/65R17	112T	/	8.0J	1120	300
	LT265/70R17	121/118R	10/E	8.0J	1450/1320	550
	* LT285/70R17	121/118Q	10/E	8.5J	1450/1320	550
	* LT315/70R17	113/110S	6/C	9.5J	1150/1060	250
	* LT285/75R17	121/118Q	8/D	8.0J	1450/1320	450
18	265/60R18	110T	/	8.0J	1060	300
	* 265/65R18	114T	/	8.0J	1180	300
	* LT265/60R18	119/116Q	10/E	8.0J	1360/1250	550
	* LT285/60R18	122/119Q	10/E	8.5J	1500/1360	550
	* LT275/65R18	123/120Q	10/E	8.0J	1500/1400	550
	* LT275/70R18	125/122Q	10/E	8.0J	1650/1500	550
20	265/50R20	111T XL	/	8.5J	1090	350
	285/50R20	116T XL	/	9.0J	1250	350
	275/55R20	117T XL	/	8.5J	1285	350
	* 305/55R20	116Q	/	9.5J	1250	300
	275/60R20	115T	/	8.0J	1215	300

Size with “*” is under development and will be available soon. Data can be changed by manufacturer without prior notice.

REBEL HAWK A/T



- ◆ TREAD CENTER WITH STAGGERED DESIGN TO INCREASE THE FORCE OF THE CONTACT PATCH AND SATISFY ALL-TERRAIN TRACTION.
- ◆ SPECIAL DESIGN OF THE CIRCUMFERENTIAL 2 STRAIGHT AND 2 CURVY GROOVES IMPROVE GRIP ON SOFT AND SLUSHY GROUND, AND THE STRONG SHOULDER OUT BLOCKS TURNING PERFORMANCE.
- ◆ STRONG CARCASS CONSTRUCTION PROVIDES EXCELLENT HIGH SPEED CONTROL.
- ◆ AGGRESSIVE SIDEWALL DESIGN IMPROVES GREAT TRACTION IN ALL CONDITIONS AND INCREASES PUNCTURE RESISTANCE.
- ◆ PROVEN COMPOUND FOR OPTIMUM PERFORMANCE ACROSS DRY, WET, SLUSHY AND ON/OFF-ROAD SURFACES.

REBEL HAWK A/T



INCH	SIZE	LI/SS	PLY	RIM WIDTH Inch	MAX LOAD kg	MAX INFL PRESSURE kpa
14	LT215/75R14	104/101S	8/D	6.0J	900/825	450
15	* 31X10.5R15LT	109S	6/C	8.5J	1030	350
	205/60R15	91H	/	6.0J	615	300
	205/65R15	94H	/	6.0J	670	300
	205/70R15	96T	/	6.0J	710	300
	265/70R15	112T	/	8.0J	1120	300
	* 215/75R15	100T	/	6.0J	800	300
	235/75R15	109S XL	/	6.5J	1030	350
	* LT215/75R15	106/103S	8/D	6.0J	950/875	450
	* LT225/75R15	108/104S	8/D	6.0J	1000/900	450
	* LT235/75R15	110/107S	8/D	6.5J	1060/975	450
16	205/60R16	92H	/	6.0J	630	300
	215/70R16	100S	/	6.5J	800	300
	225/70R16	103S	/	6.5J	875	300
	235/70R16	106S	/	7.0J	950	300
	245/70R16	111T XL	/	7.0J	1090	350
	255/70R16	111T	/	7.5J	1090	300
	265/70R16	112S	/	8.0J	1120	300
	LT225/75R16	115/112Q	10/E	6.0J	1215/1120	550
	LT245/75R16	120/116Q	10/E	7.0J	1380/1260	550
	* LT265/75R16	123/120S	10/E	7.5J	1550/1400	550
	* LT285/75R16	126/123S	10/E	8.0J	1700/1550	550
	* LT215/85R16	110/107Q	8/D	6.0J	1060/975	450
	* LT235/85R16	120/116S	10/E	6.5J	1380/1260	550
17	* 235/60R17	102H	/	7.0J	850	300
	* 225/65R17	102T	/	6.5J	850	300
	* 235/65R17	104T	/	7.0J	900	300
	245/65R17	111S XL	/	7.0J	1090	350
	265/65R17	112S	/	8.0J	1120	300
	* 245/70R17	110T	/	7.0J	1060	300
	* 265/70R17	115T	/	8.0J	1215	300
	* LT265/70R17	121/118S	10/E	8.0J	1450/1320	550

INCH	SIZE	LI/SS	PLY	RIM WIDTH Inch	MAX LOAD kg	MAX INFL PRESSURE kpa
17	* LT275/70R17	121/118S	10/E	8.0J	1450/1320	550
	* LT285/70R17	121/118S	10/E	8.5J	1450/1320	550
	* LT245/75R17	121/118S	10/E	7.0J	1450/1320	550
18	* 255/55R18	109H XL	/	8.0J	1030	350
	* 235/60R18	107H XL	/	7.0J	975	350
	* 255/60R18	112H XL	/	7.5J	1120	350
	265/60R18	110H	/	8.0J	1060	300
	* 285/60R18	116H	/	8.5J	1250	300
	* 265/65R18	114T	/	8.0J	1180	300
	* 275/65R18	116T	/	8.0J	1250	300
	* 265/70R18	116T	/	8.0J	1250	300
	* LT275/70R18	125/122S	10/E	8.0J	1650/1500	550
19	* 255/55R19	111V XL	/	8.0J	1090	350
20	* 275/45R20	110V XL	/	9.0J	1090	350
	265/50R20	111V XL	/	8.5J	1090	350
	285/50R20	116V XL	/	9.0J	1250	350
	* 275/55R20	117H XL	/	8.5J	1285	350
	* 275/60R20	115T	/	8.0J	1215	300

Size with “*” is under development and will be available soon. Data can be changed by manufacturer without prior notice.

REBEL HAWK M/T



- ◆ LARGE SURFACE TREAD AREA WITH ANGLED BLOCKS TO PROVIDE POWERFUL GRIP AND TRACTION FOR HANDLING EXTREME OFF-ROAD TERRAIN.
- ◆ ENGINEERED WITH OPTIMIZED VOID RATIO ENHANCING MUD AND DIRT CLEANOUT TO PROVIDE CONTINUOUS OFF-ROAD TRACTION.
- ◆ SHOULDER GROOVE BOTTOM PROTECTOR DESIGN HELPS TO EJECT STONES AND PROTECTS THE CARCASS FROM POSSIBLE PUNCTURE.
- ◆ ABSOLUTE OFF-ROAD APPLICATION RUBBER COMPOUND CONTRIBUTES TO EXCELLENT PERFORMANCE OF PUNCTURE/TEAR/WEAR RESISTANCE, SAFE AND SECURED.



REBEL HAWK M/T



**MUD
SNOW+**

INCH	SIZE	LI/SS	PLY	RIM WIDTH In	MAX LOAD kg	MAX INFL PRESSURE kpa
15	30X9.50R15LT	104Q	6/C	7.5J	900	350
	31X10.50R15	109Q	6/C	8.5J	1030	350
	32X11.50R15LT	113Q	6/C	9.0J	1150	350
	33X12.50R15LT	108Q	6/C	10.0J	1000	250
	LT235/75R15	110/107Q	8/D	6.5J	1060/975	450
16	LT245/75R16	120/116Q	10/E	7.0J	1380/1260	550
	LT285/75R16	126/123Q	10/E	8.0J	1700/1550	550
	LT265/75R16	123/120Q	10/E	7.5J	1550/1400	550
17	LT265/65R17	120/117Q	10/E	8.0J	1400/1285	550
	LT265/70R17	123/120Q	10/E	8.0J	1550/1400	550
	LT285/70R17	126/123Q	10/E	8.5J	1700/1550	550
	LT285/70R17	121/118Q	8/D	8.5J	1450/1320	450
	LT315/70R17	128/125Q	12/F	8.0J	1800/1650	550
	* LT285/75R17	121/118P	10/E	10.0J	1450/1320	550
	* 33X12.50R17LT	120Q E	10/E	10.0J	1400	450
	* 35X12.50R17LT	125Q E	10/E	10.0J	1650	450
	* 37X12.50R17LT	124Q D	8/D	10.0J	1600	350
18	* 37X13.50R17LT	121Q E	10/E	11.0J	1450	450
	* LT275/70R18	125/122P	10/E	8.0J	1650/1500	550
	* LT285/70R18	127/124Q	10/E	8.5J	1750/1600	550
	* 33X12.50R18LT	118Q	10/E	10.0J	1320	450
	* 35X12.50R18LT	123Q	10/E	10.0J	1550	450
20	* LT285/55R20	122/119Q	10/E	9.0J	1500/1360	550
	* LT305/55R20	125/122Q	12/F	9.5J	1650/1500	550
	* 33X12.50R20LT	114Q	10/E	10.0J	1180	450
	* 35X12.50R20LT	121Q	10/E	10.0J	1450	450
	* 35X13.50R20LT	126Q	12/F	11.0J	1700	550
	* 37X13.50R20LT	127Q	10/E	11.0J	1750	450
22	* 33X12.50R22LT	109Q	10/E	10.0J	1030	450
	* 35X12.50R22LT	117Q	10/E	10.0J	1285	450
	* 37X13.50R22LT	123Q	10/E	11.0J	1550	450

Size with "*" is under development and will be available soon. Data can be changed by manufacturer without prior notice.



AS-4 ***AS-6***

ALL-SEASON TYRES



DRIVE CONFIDENT SNOW OR SHINE

AS-4

- ◆ DIVERGENT V-GROOVE: SUPERIOR SNOW/WATER DRAINAGE
- ◆ FL-RUBBER COMPOUND: EXTENDED TREAD LIFE, ALL-SEASON PERFORMANCE.
- ◆ ENGINEERED KERFS: MAXIMIZE SNOW/WET TRACTION

AS-4

ALL-SEASON



INCH	SIZE	LI/SS	RIM WIDTH Inch	TREAD DEPTH mm	MAX LOAD kg	MAX INFL PRESSURE kpa
13	155/70R13	75T	4.5J	7.5	387	300
	155/80R13	79T	4.5J	7.5	437	300
14	155/65R14	75T	4.5J	7.5	387	300
	165/65R14	79T	5.0J	7.5	437	300
	165/70R14	81T	5.0J	7.5	462	300
	175/65R14	82T	5.0J	7.5	475	300
	175/70R14	88T	5.0J	7.5	560	300
	185/60R14	82H	5.5J	7.5	475	300
	185/65R14	86H	5.5J	7.5	530	300
	165/65R15	81T	5.0J	7.5	462	300
15	175/65R15	84H	5.0J	7.5	500	300
	185/55R15	82H	6.0J	7.8	475	300
	185/60R15	88H XL	5.5J	7.5	560	350
	185/65R15	92H XL	5.5J	7.5	630	350
	195/50R15	82V	6.0J	7.8	475	300
	195/55R15	89V XL	6.0J	7.8	580	350
	195/60R15	88V	6.0J	7.8	560	300
	195/65R15	91V	6.0J	7.8	615	300
	195/65R15	95H XL	6.0J	7.8	690	350
	205/65R15	94H	6.0J	7.8	670	300
	195/45R16	84V XL	6.5J	7.8	500	350
16	195/55R16	91V XL	6.0J	7.8	615	350
	205/55R16	91V	6.5J	7.8	615	300
	205/55R16	94V XL	6.5J	7.8	670	350
	205/60R16	96V XL	6.0J	7.8	710	350
	215/55R16	97V XL	7.0J	7.8	730	350
	215/60R16	99V XL	6.5J	7.8	775	350
	215/65R16	98V	6.5J	7.8	750	300
	185/50R16	81H	6.0J	7.8	462	300
	205/45R17	88V XL	7.0J	7.8	560	350
17	205/50R17	93V XL	6.5J	7.8	650	350
	205/55R17	95V XL	6.5J	7.8	690	350

INCH	SIZE	LI/SS	RIM WIDTH Inch	TREAD DEPTH mm	MAX LOAD kg	MAX INFL PRESSURE kpa
17	215/45R17	91W XL	7.0J	7.8	615	350
	215/50R17	95W XL	7.0J	7.8	690	350
	215/55R17	98V XL	7.0J	7.8	750	350
	215/60R17	96H	6.5J	7.8	710	300
	225/45R17	94W XL	7.5J	7.8	670	350
	225/50R17	98W XL	7.0J	7.8	750	350
	225/55R17	101W XL	7.0J	7.8	825	350
	225/65R17	106H XL	6.5J	7.8	950	350
18	215/45R18	93W XL	7.0J	7.8	650	350
	215/55R18	99V XL	7.0J	7.8	775	350
	225/40R18	92W XL	8.0J	7.8	630	350
	225/45R18	95W XL	7.5J	7.8	690	350
	225/55R18	98V	7.0J	7.8	750	300
	235/45R18	98W XL	8.0J	7.8	750	350
	245/45R18	100W XL	8.0J	7.8	800	350
19	245/45R19	102W XL	8.0J	7.8	850	350

MASTER ALL SEASONS MASTER THE ROAD

- ◆ PREMIUM ALL-SEASON COMMERCIAL TYRE
- ◆ UNMATCHED SAFETY IN ALL CONDITIONS: DOMINATES SNOW, MUD, AND WET ROADS WITH ELITE GRIP, RESPONSIVE HANDLING, AND UNSHAKABLE TRACTION.
- ◆ ENGINEERED FOR COMFORT AND PRECISION, COMBINING A QUIET RIDE WITH LONG-LASTING TREAD LIFE.

AS-6 ALL-SEASON



INCH	SIZE	LI/SS	RIM WIDTH Inch	SECTION WIDTH (mm)	OA. DIAMETER (mm)	MAX LOAD kg	MAX INFL PRESSURE kpa
15	195/70R15C	104/102R	6.0J	201	655	900/850	450
	215/70R15C	109/107R	6.5J	221	683	1030/975	450
16	195/65R16C	104/102T	6.0J	201	660	900/850	475
	195/75R16C	107/105R	5.5J	196	698	975/925	475
	205/65R16C	107/105T	6.0J	209	672	975/925	475
	215/65R16C	109/107R	6.5J	221	686	1030/975	475
	235/65R16C	115/113R	7.0J	240	712	1215/1150	475