



# Tyre Databook

## 2025

Car | 4x4 | Van



This data book contains comprehensive information on our car, 4x4, LT (light truck) and van tyres.

Unless not otherwise specified, the instructions and data given in this data book are valid for all tyre brands of Continental AG.

Instructions and data exclusively valid for Continental or other single tyre brands are specially marked or displayed on separate pages.

## Tyre safety tips

The technical data and other details on tyres and accessories have been compiled to reflect as exactly and completely as possible the current state of development and are based on **ETRTO<sup>1)</sup>**, **ISO<sup>2)</sup>**, **WdK** and **DIN<sup>3)</sup>** standards.

Most of the tyres of Continental AG comply with **DOT<sup>4)</sup>** regulations and are marked accordingly.

They are homologated in accordance with the relevant **UN / ECE<sup>5)</sup>** regulation.

This databook is intended for information and instruction only. No liability whatsoever will be accepted for damage, regardless of its nature and its legal basis, arising from advice given in this book.

We recommend that the **inflation pressure** of every tyre is **checked** and adjusted at least **every 14 days**. This does also apply for vehicles equipped with a tyre pressure monitoring system (TPMS). Avoid driving over sharp-edged or pointed objects.

Lower inflation pressures, greater loads or higher speeds than specified by the vehicle and / or tyre manufacturer all shorten the **service life** of tyres and can result in structural damages.

We recommended that **new tyres** are **run in** at moderate speeds for the first 125 to 190 miles (200 to 300 km) to roughen the tread surface. The tyre does not achieve its best performance until after this running-in period.

We recommend all wheel positions are fitted with tyres of the **same tread pattern**.

It is especially important that SSR runflat tyres\*) are not mixed with standard tyres.

Please observe the detailed operating instructions on page 115 ff.



### SAFETY WARNING!

The instructions given in this databook must be observed to ensure vehicle safety at all times.

This applies especially with respect to tyre inflation pressure recommendations. **Non-compliance with these instructions means risking tyre damage which, if serious enough, may result in a tyre bursting. It is hazards like these that can cause traffic accidents involving vehicle damage and / or serious personal injury.**

<sup>1)</sup> ETRTO - The European Tyre and Rim Technical Organisation, Brussels

<sup>2)</sup> ISO - International Organization for Standardization

<sup>3)</sup> DIN - German Institute for Standardisation, Berlin  
WdK - German Rubber Manufacturers' Association, Frankfurt / M.

<sup>4)</sup> DOT - Department of Transportation (USA)

<sup>5)</sup> UN / ECE - Economic Commission for Europe (UNO-Institution, Geneva)

\*) only available for tyre brand Continental and Uniroyal  
See page 26 for further details

The content of this publication is provided for information only and without responsibility. Continental AG makes no representations about the accuracy, reliability, completeness or timeliness of the information in this publication. Continental AG may, in its sole discretion, revise the information contained herein at any time without notice.

Continental AG's obligations and responsibilities regarding its products are governed solely by the agreements under which they are sold. Unless otherwise agreed in writing, the information contained herein does not become part of these agreements. This publication does not contain any guarantee or agreed quality of Continental AG's products or any warranty of merchantability, fitness for a particular purpose and non-infringement. Continental AG may make changes in the products or services described at any time without notice.

This publication is provided on an "as is" basis. To the extent permitted by law, Continental AG makes no warranty, express or implied, and assumes no liability in connection with the use of the information contained in this publication. Continental AG is not liable for any direct, indirect, incidental, consequential or punitive damages arising out of the use of this publication. Information contained herein is not intended to announce product availability anywhere in the world.

The trademarks, service marks and logos (the Trademarks) displayed in this publication are the property of Continental and / or its affiliates. Nothing in this publication should be construed as granting any license or right to the Trademarks. Without the express written consent of Continental AG the use of the Trademarks is prohibited.

All text, images, graphics and other materials in this publication are subject to the copyright and other intellectual property rights of Continental AG and / or its affiliates. Continental AG owns the copyrights in the selection, coordination and arrangement of the materials in this publication. These materials may not be modified or copied for commercial use or distribution.

Copyright © 2025 Continental AG  
All rights reserved.

TD C 01/2025

Information

|                                                                       |    |
|-----------------------------------------------------------------------|----|
| Introduction, Safety hints . . . . .                                  | 2  |
| Publisher's imprint . . . . .                                         | 4  |
| Tyre Sidewall Information . . . . .                                   | 6  |
| Service description (including Load Index and Speed Symbol) . . . . . | 8  |
| Definition of tyre & rim dimensions . . . . .                         | 9  |
| Information on the EU Tyre Label regulation . . . . .                 | 10 |

Passenger car tyres


|                                                                      |    |
|----------------------------------------------------------------------|----|
| <b>Continental brand tread patterns and recommended applications</b> |    |
| - Passenger / SUV Summer tyres . . . . .                             | 11 |
| - Passenger / SUV Winter tyres . . . . .                             | 20 |
| - Allseason tyres . . . . .                                          | 24 |
| <b>Tyre Technologies</b>                                             |    |
| - SSR runflat tyres . . . . .                                        | 26 |
| - New general marking for Runflat Tyres . . . . .                    | 27 |
| - ContiSeal tyres . . . . .                                          | 28 |
| - ContiSilent technology . . . . .                                   | 29 |
| - E-Mobility . . . . .                                               | 30 |
| <b>Tyre Data of all tyre brands of Continental</b>                   |    |
| - Passenger / SUV, 4 x 4 . . . . .                                   | 32 |
| - LT, 4 x 4 . . . . .                                                | 74 |
| Special spare tyres . . . . .                                        | 80 |
| Conti Sealant kits and replacement . . . . .                         | 84 |

Van tyres

|                                                                               |     |
|-------------------------------------------------------------------------------|-----|
| Continental brand tread patterns and recommended applications . . . . .       | 86  |
| Technical data of all tyre brands of Continental . . . . .                    | 92  |
| Tyres for caravans and car drawn trailers (special load capacities) . . . . . | 102 |
| Car rims . . . . .                                                            | 111 |

Operating instructions


|                                                               |     |
|---------------------------------------------------------------|-----|
| Correct choice of tyre and wheel . . . . .                    | 115 |
| Winter tyres . . . . .                                        | 116 |
| Tread rubber brittleness influenced by temperature . . . . .  | 117 |
| Fitting the tyre . . . . .                                    | 117 |
| Fitting the wheel to the vehicle . . . . .                    | 118 |
| Tyre pressure . . . . .                                       | 118 |
| Load capacity and speed . . . . .                             | 124 |
| Tyre damage . . . . .                                         | 126 |
| Tyre rotation on a vehicle . . . . .                          | 126 |
| Tyre storage . . . . .                                        | 128 |
| Tyre repair . . . . .                                         | 130 |
| Tyre service life for passenger car and light truck . . . . . | 132 |
| Minimum tread depth . . . . .                                 | 133 |
| Guidelines on tyre safety . . . . .                           | 134 |
| Index . . . . .                                               | 136 |
| Service . . . . .                                             | 138 |

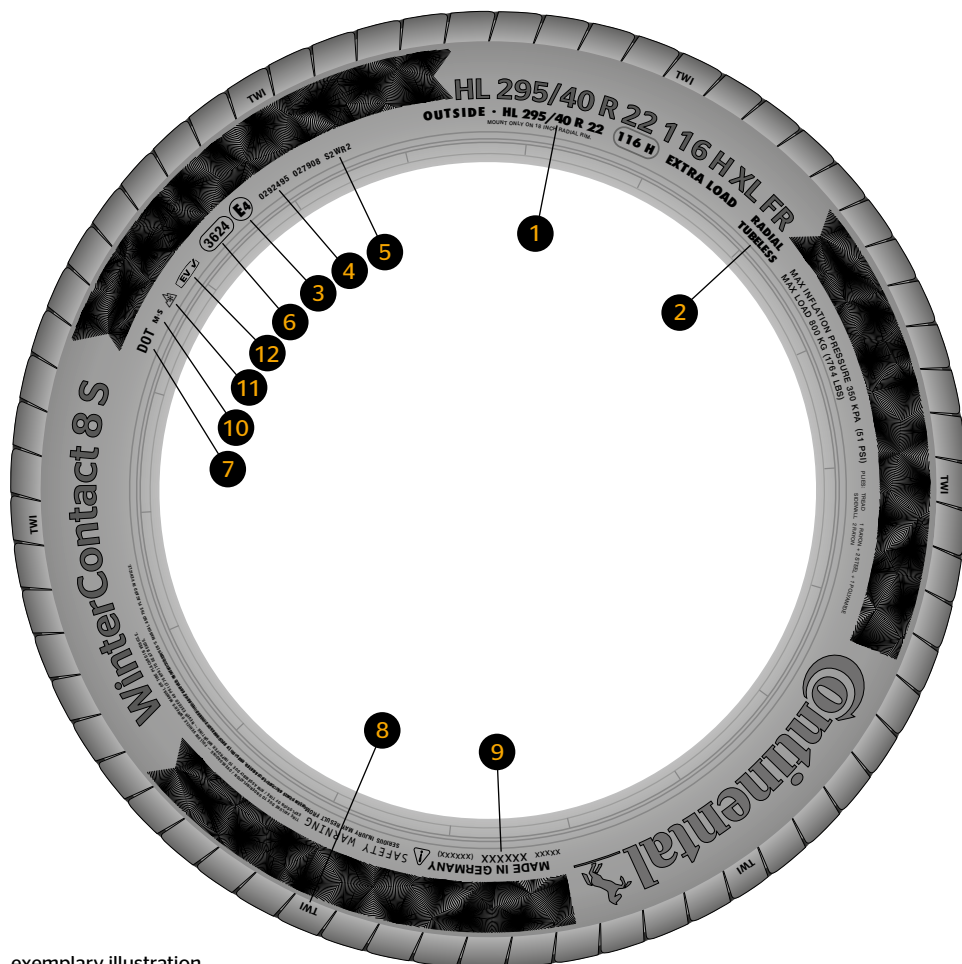

exemplary illustration

## UN - Regulation update R117.03/04

| Tyre Sidewall Marking               | 02122167<br>038426 S2WR2B          02122167<br>048426 S2W/R:B <b>B = "buffed" tyres</b>                                           |
|-------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|
| Application for tyre homologation   | > Regulation 117.03 & 04<br>From July 2026: C1 "W2,R3 & B" / C2&C3 "B"<br>> From Sept 28: C2/C3 "W2, R3 & B placed on the market" |
| Wet Grip worn (Introduction)        | > C1: slightly adapted limits<br>> C2/C3: new limits for calculated worn condition                                                |
| Wet Grip new (tighter limits)       | > 10-20% improved wet performance on tyre category                                                                                |
| Rolling Resistance (tighter limits) | > Most tyres below label class C will be phased out, with exemptions depending on tyre category                                   |



Example data for WinterContact 8 S (tyre brand Continental). The specifications on a tyre sidewall are standardised and apply for other tyre brands accordingly.

- 1 **HL 295/40 R 22 116 H XL FR**
  - 295 Nominal section width in mm.
  - 40 Nominal aspect ratio (Tyre height is 40 % of tyre width).
  - R Symbol for radial tyre (or RF for run flat tyres).
  - 22 Rim diameter code.
  - 116 Load Index "116" = max. load of this tyre is 1250 kg (see table page 8).
  - H Speed Symbol, indicating max. speed: H=210 km/h / 130 mph (see table page 8).
  - Other information may be added after the size marking:
  - HL new: HL in combination with XL for especially high load capacity.
  - XL Extra Load, reinforced tyre for increased load capacity.
  - FR Flange Rib
- 2 **TUBELESS** tubeless. (TUBE TYPE tyres must be mounted with tubes).
- 3 **E 4** Marking indicating accordance with UN regulations. The number after the E in the circle indicates the country of homologation. (E) (4=Netherlands).
- 4 **0292495** Approval number acc. to relevant UN regulation.
- 5 **S2WR2** The string "S2WR2" indicates compliance with maximum permissible sound value S2, required wet grip and max. value of rolling resistance R2.
- 6 **3624** Production code (on one side of the tyre) ("36" means week 36, "24" means year 2024).
- 7 **DOT** DOT = Department of Transportation, USA.
- 8 **TWI** TWI = Tread Wear Indicator. Cross ribs evenly spaced around the circumference of the tyre in the longitudinal tread grooves and becoming level with the tread surface when the remaining tread depth is down to 1.6 mm.
- 9 **Made in ...** Marking showing the country of origin.
- 10 **M + S symbol M+S** 'Snow tyre' means a tyre whose tread pattern, tread compound or structure is primarily designed to perform better in snow conditions than a normal tyre with regard to its ability to initiate or maintain vehicle motion.
- 11 **3PMSF symbol** The Alpine symbol identifies winter tyres according to UN regulations. The snow performance of these winter tyres has to be proven by objective tests and meet or exceed defined limits. These tyres provide high performance with regards to safety and control on snow and in general on winter road conditions.
- 12 **EV symbol EV** Compatible with electric vehicles.

Other possible important markings on the sidewall



Ice Grip Pictogram can be used for winter tyres (only C1) with outstanding ice performance confirmed by a defined ice grip test (ISO 19447).

## Including Load Index and Speed Symbol

## Load Index (LI)

The Load Index is a numerical code associated with the maximum load a tyre can carry (see also page 125).

| LI | kg  | LI | kg  | LI | kg  | LI  | kg   | LI  | kg   |
|----|-----|----|-----|----|-----|-----|------|-----|------|
| 50 | 190 | 66 | 300 | 82 | 475 | 98  | 750  | 114 | 1180 |
| 51 | 195 | 67 | 307 | 83 | 487 | 99  | 775  | 115 | 1215 |
| 52 | 200 | 68 | 315 | 84 | 500 | 100 | 800  | 116 | 1250 |
| 53 | 206 | 69 | 325 | 85 | 515 | 101 | 825  | 117 | 1285 |
| 54 | 212 | 70 | 335 | 86 | 530 | 102 | 850  | 118 | 1320 |
| 55 | 218 | 71 | 345 | 87 | 545 | 103 | 875  | 119 | 1360 |
| 56 | 224 | 72 | 355 | 88 | 560 | 104 | 900  | 120 | 1400 |
| 57 | 230 | 73 | 365 | 89 | 580 | 105 | 925  | 121 | 1450 |
| 58 | 236 | 74 | 375 | 90 | 600 | 106 | 950  | 122 | 1500 |
| 59 | 243 | 75 | 387 | 91 | 615 | 107 | 975  | 123 | 1550 |
| 60 | 250 | 76 | 400 | 92 | 630 | 108 | 1000 | 124 | 1600 |
| 61 | 257 | 77 | 412 | 93 | 650 | 109 | 1030 | 125 | 1650 |
| 62 | 265 | 78 | 425 | 94 | 670 | 110 | 1060 | 126 | 1700 |
| 63 | 272 | 79 | 437 | 95 | 690 | 111 | 1090 | 128 | 1800 |
| 64 | 280 | 80 | 450 | 96 | 710 | 112 | 1120 | 131 | 1950 |
| 65 | 290 | 81 | 462 | 97 | 730 | 113 | 1150 |     |      |

## Speed Symbol (SSY)

The Speed Symbol indicates the maximum speed at which the tyre can carry a load corresponding to its Load Index.


| SSY    | Max. speed for passenger car tyres |                             | SSY | Reference speed for commercial vehicle tyres |          |
|--------|------------------------------------|-----------------------------|-----|----------------------------------------------|----------|
| M      | 81 mph <sup>1)</sup>               | 130 km/h <sup>1)</sup>      | K   | 69 mph                                       | 110 km/h |
| P      | 93 mph                             | 150 km/h                    | L   | 75 mph                                       | 120 km/h |
| Q      | 100 mph                            | 160 km/h                    | M   | 81 mph                                       | 130 km/h |
| R      | 106 mph                            | 170 km/h                    | N   | 87 mph                                       | 140 km/h |
| S      | 112 mph                            | 180 km/h                    | P   | 93 mph                                       | 150 km/h |
| T      | 118 mph                            | 190 km/h                    | Q   | 100 mph                                      | 160 km/h |
| H      | 130 mph                            | 210 km/h                    | R   | 106 mph                                      | 170 km/h |
| V      | 150 mph                            | 240 km/h                    | S   | 112 mph                                      | 180 km/h |
| W      | 169 mph                            | 270 km/h                    | T   | 118 mph                                      | 190 km/h |
| Y      | 187 mph                            | 300 km/h                    | H   | 130 mph                                      | 210 km/h |
| (...Y) | over 187 mph <sup>2)</sup>         | over 300 km/h <sup>2)</sup> |     |                                              |          |
| (ZR*)  | over 150 mph                       | over 240 km/h               |     |                                              |          |

<sup>1)</sup> As a rule only used for special spare tyres if they qualify according to UN Regulation 30. In accordance with UN Regulation 64 governing the use of special spare tyres, even higher speed rated tyres may only be used up to a maximum speed of 50 mph (80 km/h).

<sup>2)</sup> See page 125, table 5 for details.

\* Obsolete designation, production until Nov., 2014.

## Definition of tyre &amp; rim dimensions

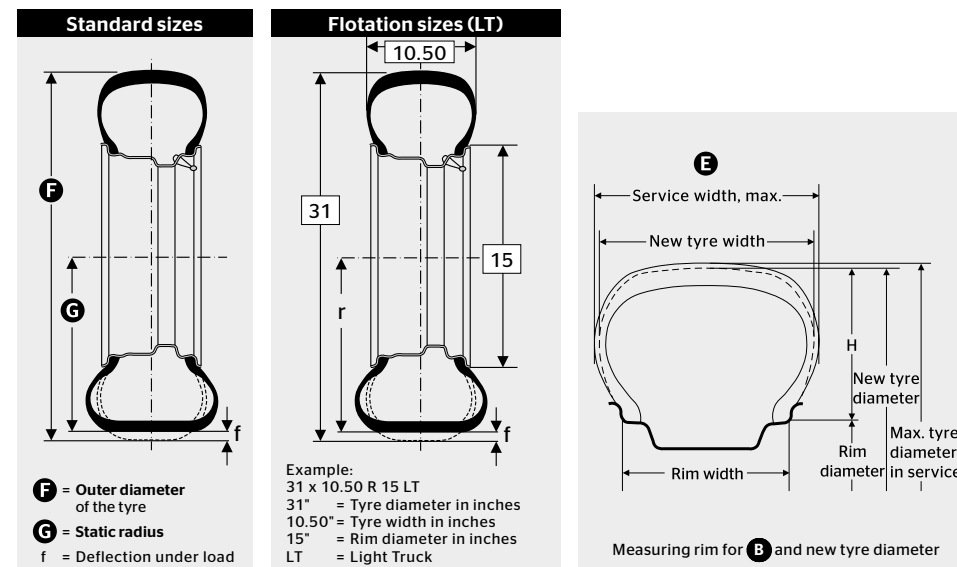

| Size | Tyre <b>A</b> |               | Permitted rims <sup>1) 7)</sup> | Tyre dimensions                                         |                     | Radius         | Rolling circumference <sup>3)</sup> |
|------|---------------|---------------|---------------------------------|---------------------------------------------------------|---------------------|----------------|-------------------------------------|
|      | Load Index    | Load capacity | <b>B</b>                        | <b>D</b> Max. standard value in operation <sup>2)</sup> | <b>E</b> Width (mm) | <b>G</b> stat. | <b>H</b>                            |
|      | LI            | kg            | (measuring rim bold)            | <b>F</b> Outer-Ø (mm)                                   |                     | + / - 2 % (mm) | + 1.5 %<br>- 2.5 % (mm)             |

Display of the measurement specs in the table headers of this Databook, here example of passenger and SUV tyres - p. 32 ff.

**Tyre size designations **A**** as well as the technical data in the tables do comply with international standards.

All **dimensions** are given in millimeters (mm), if not indicated in a different way.

The **rim width **B** and diameter** are given in inch code. (Tyre ranges on new rim types may also be marked in mm.)

The **load capacity **C**** is indicated in kilograms (kg).

**Construction measurements** are theoretical values for the design of the tyre: The width is relative to the smooth sidewall, the outer diameter to the tread centre.

**Maximum measurements **D**** are actual **operating measurements** of the inflated tyre (operating pressure) in the unloaded state. They include growth but exclude dynamic distortions. The max. measurements are binding for vehicle designers.

Vehicle designers should bear in mind the maximum values for tyre outer diameter and width when planning the wheel space of a vehicle, if all standard approved tyres are to fit without any restrictions.

The **width **E**** is the max. permitted tyre width, including sidewall decorative markings, when the tyre is mounted on the correct rim.

The **outer diameter **F**** is the max. permitted diameter.

The **static radius **G**** is the distance between the wheel centre and the ground contact patch under max. load at the recommended tyre pressure.


The **rolling circumference **H**** is the distance covered by a point on the circumference when the tyre revolves once at 60 km/h (37 mph).

## EU Tyre Label

### Information on the EU Tyre Label regulation

The EU tyre labelling provides consumers, fleet operators and tyre retailers with objective, reliable and comparable information on three important tyre performance characteristics: the tyre's rolling resistance, wet grip and external rolling noise. A pictogram indicating if the tyre is suitable for use in severe snow conditions (winter and all-season tyres) or even in extreme ice conditions (only for C1 tyres) is present in tyres fulfilling such performance levels. **This EU tyre labelling scheme has been effective since May 1<sup>st</sup>, 2021.**

### The EU tyre label

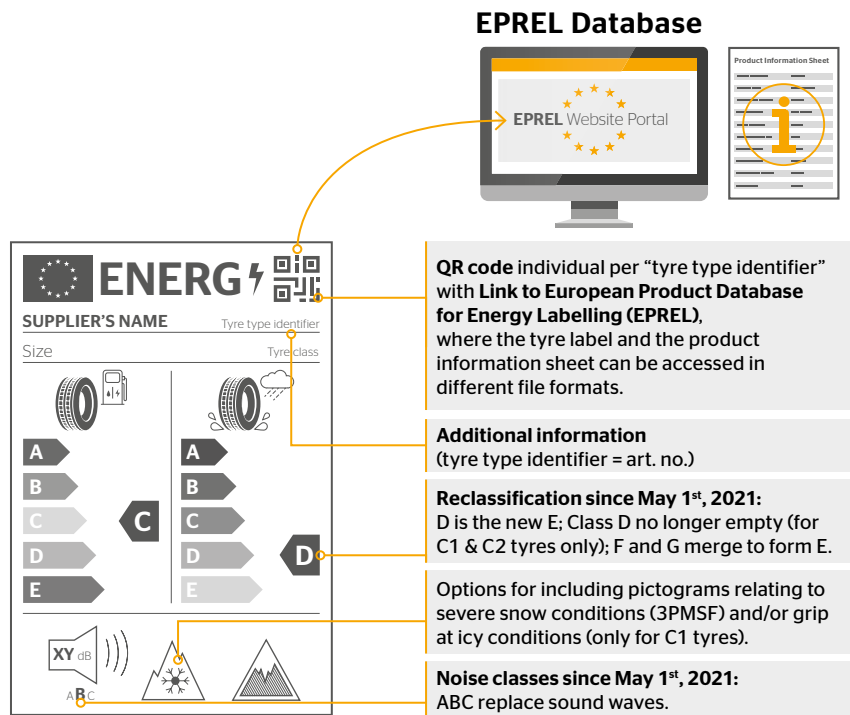

[https://energy-efficient-products.ec.europa.eu/product-list/tyres\\_en#tyre-labelling](https://energy-efficient-products.ec.europa.eu/product-list/tyres_en#tyre-labelling)

## Passenger and SUV Summer tyres

### SportContact 7

For sports and high-performance vehicles

- › Gives you confidence with safe and stable driving behaviour on wet and dry surfaces.
- › A perfect interplay of extra-soft Black-Chili compound and extra-stiff pattern for long-lasting, next-level driving pleasure.
- › Tailor-made for different vehicle classes to give you the typical SportContact feeling.
- › Asymmetrical non-directional tread pattern.

#### Tyre dimensions

|                    |                        |
|--------------------|------------------------|
| Tyre width in mm   | 215-335                |
| Rim size in inches | 18-23                  |
| Speed Symbol       | T / V / W / Y / (...Y) |
| Tyre cross-section | series 25-45           |

A-D A-B A-B / 70-75 dB

### SportContact 6

For sports and high-performance vehicles

- › Maximum control for absolute steering precision.
- › Maximum stability at high speeds.
- › Maximum grip for short braking distances.
- › Asymmetrical non-directional tread pattern.

#### Tyre dimensions

|                    |                    |
|--------------------|--------------------|
| Tyre width in mm   | 225-335            |
| Rim size in inches | 18-24              |
| Speed Symbol       | H / V / Y / (...Y) |
| Tyre cross-section | series 25-50       |

A-D A-C B / 71-75 dB

Also available as SSR runflat tyre and with noise reducing ContiSilent technology. See page 26 / 29 for further details.

## Passenger and SUV Summer tyres

### ContiSportContact 5 P

For sports and high-performance vehicles

- › Perfect steering precision and sporty handling.
- › Outstanding grip and stability during cornering.
- › Optimised rolling resistance thanks to 'Cap and Base' tread.
- › Asymmetrical non-directional tread pattern.

#### Tyre dimensions

|                    |              |
|--------------------|--------------|
| Tyre width in mm   | 225-325      |
| Rim size in inches | 18-22        |
| Speed Symbol       | Y / (...Y)   |
| Tyre cross-section | series 30-45 |

C-D A-B B / 72-75 dB

Also available as SSR runflat tyre and with noise reducing ContiSilent technology. See page 26/29 for further details.



### ContiSportContact 5

For high-performance vehicles

- › Excellent road grip and safety when cornering.
- › Shorter braking distances in all weather conditions.
- › Reduced fuel consumption and high mileage.
- › Asymmetrical non-directional tread pattern.

#### Tyre dimensions

|                    |                |
|--------------------|----------------|
| Tyre width in mm   | 195-315        |
| Rim size in inches | 17-22          |
| Speed Symbol       | H/V/W/Y/(...Y) |
| Tyre cross-section | series 35-65   |

A-D A-D B / 71-75 dB

Also available as SSR runflat tyre, ContiSeal tyre and with noise reducing ContiSilent technology. See page 26/29 for further details.



## Passenger and SUV Summer tyres

### PremiumContact 7

For mid-sized and executive class vehicles

- › Experience next-level handling on wet and dry roads.
- › Enjoy safety and comfort no matter which drive you choose.
- › Rely on safe braking right from the start thanks to our RedChili compound.
- › Asymmetrical non-directional tread pattern.

#### Tyre dimensions

|                    |              |
|--------------------|--------------|
| Tyre width in mm   | 205-315      |
| Rim size in inches | 16-21        |
| Speed Symbol       | T/H/V/W/Y    |
| Tyre cross-section | series 35-65 |

B-C A B / 71-73 dB



### PremiumContact 6

For mid-sized and executive class vehicles

- › Maximum wet braking while improving mileage due to Safety Silica Compounds.
- › Extended driving convenience upgraded by the comfort-optimised performance footprint.
- › Sporty driving in every car thanks to handling-optimised pattern design.
- › Asymmetrical non-directional tread pattern.

#### Tyre dimensions

|                    |                |
|--------------------|----------------|
| Tyre width in mm   | 185-325        |
| Rim size in inches | 15-22          |
| Speed Symbol       | H/V/W/Y/(...Y) |
| Tyre cross-section | series 30-65   |

A-D A-B A-B / 69-75 dB

Also available as SSR runflat tyre, ContiSeal tyre and with noise reducing ContiSilent technology. See page 26 - 29 for further details.



### Passenger and SUV Summer tyres

#### ContiPremiumContact 5

For mid-sized and executive class vehicles

- › Perfect grip and optimal handling in every driving situation.
- › Short braking distances on dry and wet surfaces.
- › Comfortable driving and improved rolling resistance.
- › Asymmetrical non-directional tread pattern.

| Tyre dimensions    |                   |
|--------------------|-------------------|
| Tyre width in mm   | 165-235           |
| Rim size in inches | 14-17             |
| Speed Symbol       | T / H / V / W / Y |
| Tyre cross-section | series 50-70      |

B-D A-B B / 70-72 dB

Also available as ContiSeal tyre.  
See page 28 for further details.



#### UltraContact NXT

For a wide range of vehicles

- › Experience our most sustainable tire with a share of up to 65%\*\* recycled and renewable material.
- › Enjoy outstanding mileage thanks to our proven Yellow Chili compound.
- › Rely on a safe, efficient and comfortable driving performance.
- › Asymmetrical non-directional tread pattern.

| Tyre dimensions    |               |
|--------------------|---------------|
| Tyre width in mm   | 205-255       |
| Rim size in inches | 16-20         |
| Speed Symbol       | T / V / W / Y |
| Tyre cross-section | series 45-55  |

A A A / 69-70 dB



\*\*1) Exact percentage depending on tire size. The UltraContact NXT contains 37% recycled and renewable material. Furthermore, Continental sourced an amount of 28% mass balance approach certified materials from bio-based, bio-circular and/or circular feedstock.

### Passenger and SUV Summer tyres

#### UltraContact

For mid-sized and compact class vehicles

- › Enjoy superior mileage thanks to our brand new YellowChili compound.
- › Rely on remarkable robustness with our UltraShield casing.
- › Experience convincing wet performance and low noise.
- › Asymmetrical non-directional tread pattern.

| Tyre dimensions    |                       |
|--------------------|-----------------------|
| Tyre width in mm   | 155-275               |
| Rim size in inches | 14-20                 |
| Speed Symbol       | Q / T / H / V / W / Y |
| Tyre cross-section | series 40-80          |

B-C A A-B / 68-72 dB



#### EcoContact 7 / 7 S

For mid-sized and compact class vehicles

- › Redefined efficiency through advanced materials and ingeniously designed sidewalls that reduce drag and add range.
- › Experience enhanced noise reduction thanks to our pattern technology and new Green Chili compound 3.0.
- › Tailored compounds for improved fuel efficiency and enhanced driving dynamics.
- › Asymmetrical non-directional tread pattern.
- › **EcoContact 7 S:**  
The EcoContact 7 S compound was developed to enhance driving dynamics. Perfectly tailored to meet all demands!

| Tyre dimensions    | EcoContact 7 | EcoContact 7 S |
|--------------------|--------------|----------------|
| Tyre width in mm   | 205-275      | 235-265        |
| Rim size in inches | 17-22        | 20-22          |
| Speed Symbol       | H/V/W        | H/V            |
| Tyre cross-section | series 35-60 | series 35-45   |

**EcoContact 7** A-B B A-B / 69-73 dB

**EcoContact 7 S** A-C A B / 71-73 dB

Also available as ContiSeal tyre.  
See page 28 for further details.



## Passenger and SUV Summer tyres

### EcoContact 6 / 6 Q

For a wide range of vehicles

- › Reduced fuel consumption and CO<sub>2</sub> emissions.
- › Go further thanks to the GreenChili 2.0 compound.
- › Master every twist and turn with optimised grip and handling.
- › **EcoContact 6 Q:** Pattern upgrade for reduced sound emissions.
- › Asymmetrical non-directional tread pattern.

| Tyre dimensions       | EcoContact 6                                 | EcoContact 6 Q |
|-----------------------|----------------------------------------------|----------------|
| Tyre width in mm      | 145-315                                      | 195-325        |
| Rim size in inches    | 13-22                                        | 16-23          |
| Speed Symbol          | Q/T/H/V/W/Y                                  | T/H/V/W/Y      |
| Tyre cross-section    | series 30-80                                 | series 30-65   |
| <b>EcoContact 6</b>   | A-C            A-B            B / 70-75 dB   |                |
| <b>EcoContact 6 Q</b> | A-C            A-B            A-B / 68-73 dB |                |

Also available as ContiSeal tyre.  
See page 28 for further details.

### ContiEcoContact 5

For compact and mid-sized vehicles

- › Optimised rolling resistance for reduced fuel consumption.
- › High braking safety and short braking distances on wet roads.
- › Asymmetrical non-directional tread pattern.

| Tyre dimensions    |                   |
|--------------------|-------------------|
| Tyre width in mm   | 165-245           |
| Rim size in inches | 14-20             |
| Speed Symbol       | T / H / V / W / Y |
| Tyre cross-section | series 45-70      |

A-D
 A-C
 A-B / 68-72 dB

Also available as SSR runflat tyre and ContiSeal tyre.  
See page 26 / 29 for further details.

## SUV Onroad tyres

### CrossContact UHP

For sporty SUVs

- › Short braking distances and high cornering stability.
- › Safety reserves for outstanding handling and fun at the wheel.
- › Low rolling resistance and excellent grip.
- › Asymmetrical non-directional tread pattern.

| Tyre dimensions                            |              |
|--------------------------------------------|--------------|
| Tyre width in mm                           | 235-305      |
| Rim size in inches                         | 16-23        |
| Speed Symbol                               | H/V/W/Y      |
| Tyre cross-section                         | series 30-65 |
| B-D            A-C            B / 71-75 dB |              |

Also available as SSR runflat tyre and ContiSeal tyre.  
See page 26 / 29 for further details.

0% Offroad 100% Onroad

## SUV Allround tyres

### ContiCrossContact LX 2

For SUVs and offroad vehicles

- › Excellent dry and wet braking performance and very good handling properties.
- › High mileage and high level of driving comfort.
- › Outstanding traction in light offroad use.
- › Non-directional tread pattern.

| M+S | Tyre dimensions                            |
|-----|--------------------------------------------|
|     | Tyre width in mm 205-285                   |
|     | Rim size in inches 15-18                   |
|     | Speed Symbol S / T / H / V                 |
|     | Tyre cross-section series 50-75            |
|     | A-D            C-D            B / 70-74 dB |

20% Offroad 80% Onroad

#### M+S

'Snow tyre' means a tyre whose tread pattern, tread compound or structure is primarily designed to perform better in snow conditions than a normal tyre with regard to its ability to initiate or maintain vehicle motion.

## SUV Allround tyres

### ContiCrossContact LX

For SUVs and offroad vehicles



- › Excellent handling and braking performance for onroad and offroad use.
- › Good protection against aquaplaning.
- › Precise steering response and superb straight-line tracking.
- › Asymmetrical non-directional tread pattern.

| M+S | Tyre dimensions                        |
|-----|----------------------------------------|
|     | Tyre width in mm <b>215-265</b>        |
|     | Rim size in inches <b>16-18</b>        |
|     | Speed Symbol <b>T / H / V</b>          |
|     | Tyre cross-section <b>series 60-70</b> |
|     | B / 71-73 dB                           |



### ContiCrossContact LX Sport

For SUVs and offroad vehicles



- › Outstanding handling for onroad and general offroad use.
- › Excellent braking performance on dry and wet roads.
- › Optimised rolling resistance.
- › Asymmetrical non-directional tread pattern.

| M+S | Tyre dimensions                        |
|-----|----------------------------------------|
|     | Tyre width in mm <b>215-315</b>        |
|     | Rim size in inches <b>16-22</b>        |
|     | Speed Symbol <b>T / H / V / W / Y</b>  |
|     | Tyre cross-section <b>series 30-70</b> |
|     | B / 70-75 dB                           |

Also available as SSR runflat tyre and with noise reducing ContiSilent technology. See page 26 / 29 for further details.



#### M+S

'Snow tyre' means a tyre whose tread pattern, tread compound or structure is primarily designed to perform better in snow conditions than a normal tyre with regard to its ability to initiate or maintain vehicle motion.

## SUV Allround tyres

### 4x4Contact

For SUVs and offroad vehicles



- › Excellent noise level and comfort in onroad use.
- › Good protection against aquaplaning.
- › Superb traction both on- and offroad.
- › Asymmetrical non-directional tread pattern.

| M+S | Tyre dimensions                        |
|-----|----------------------------------------|
|     | Tyre width in mm <b>195-275</b>        |
|     | Rim size in inches <b>15-19</b>        |
|     | Speed Symbol <b>T / H / V</b>          |
|     | Tyre cross-section <b>series 45-80</b> |
|     | B / 71-73 dB                           |



## 4x4 tyres

### CrossContact ATR

For SUVs, pickup trucks and offroad vehicles



- › Additional offroad traction and grip.
- › Increased wet traction and braking on slippery roads.
- › Improved overall durability.
- › Non-directional tread pattern.

| M+S | Tyre dimensions                        |
|-----|----------------------------------------|
|     | Tyre width in mm <b>205-275</b>        |
|     | Rim size in inches <b>15-20</b>        |
|     | Speed Symbol <b>T / H / V / W</b>      |
|     | Tyre cross-section <b>series 40-80</b> |
|     | B / 71-73 dB                           |



#### M+S

'Snow tyre' means a tyre whose tread pattern, tread compound or structure is primarily designed to perform better in snow conditions than a normal tyre with regard to its ability to initiate or maintain vehicle motion.

## 4x4 tyres

### CrossContact H/T

For crossovers, SUVs and pickup vehicles



- › Tackle any everyday driving situation that comes your way with the adaptive multipurpose pattern design – not least where the asphalt ends.
- › Benefit from long-lasting driving pleasure due to improved tread life.
- › Enjoy a quiet and comfortable ride thanks to low road noise.
- › Non-directional tread pattern.

**M+S**

#### Tyre dimensions

|                    |              |
|--------------------|--------------|
| Tyre width in mm   | 205-285      |
| Rim size in inches | 15-21        |
| Speed Symbol       | T/H/V/W      |
| Tyre cross-section | series 45-75 |

C-D C A-B / 70-72 dB



## Winter tyres

### WinterContact 8 S

For sports and high-performance vehicles



- › Feel the difference with superior traction on snow.
- › Enjoy dynamic handling on dry winter roads for outstanding sporty driving pleasure.
- › Rely on excellent wet braking performance for a safe and confident drive.
- › Directional tread pattern.



**M+S**

#### Tyre dimensions

|                    |              |
|--------------------|--------------|
| Tyre width in mm   | 225-315      |
| Rim size in inches | 19-22        |
| Speed Symbol       | H / V / W    |
| Tyre cross-section | series 30-60 |

B-C B B / 72-75 dB



The Alpine symbol identifies winter tyres according to UN regulations. The snow performance of these winter tyres has to be proven by objective tests and meet or exceed defined limits. These tyres provide high performance with regards to safety and control on snow and in general on winter road conditions.

## Winter tyres

### WinterContact TS 870

For mid-size and compact vehicles



- › Keep cool and enjoy perfect control on snowy and icy roads.
- › Stay in lane with outstanding wet braking and aquaplaning resistance.
- › Cover longer distances with extra-low fuel consumption.
- › Directional tread pattern.



**M+S**

#### Tyre dimensions

|                    |              |
|--------------------|--------------|
| Tyre width in mm   | 155-225      |
| Rim size in inches | 14-19        |
| Speed Symbol       | T / H / V    |
| Tyre cross-section | series 40-70 |

C-D B-C B / 69-72 dB

### WinterContact TS 860

For compact and mid-sized vehicles



- › CoolChili ensures maximum braking performance in any wintry weather condition.
- › Liquid Layer Drainage reduces the braking distance on frostcovered and icy roads.
- › Snow Curve+ technology for safe cornering on snow-covered roads.
- › Directional tread pattern.



**M+S**

#### Tyre dimensions

|                    |              |
|--------------------|--------------|
| Tyre width in mm   | 155-225      |
| Rim size in inches | 13-17        |
| Speed Symbol       | T / H / V    |
| Tyre cross-section | series 40-80 |

C-D B-C B / 71-72 dB

Also available as ContiSeal tyre.  
See page 28 for further details

**M+S**

'Snow tyre' means a tyre whose tread pattern, tread compound or structure is primarily designed to perform better in snow conditions than a normal tyre with regard to its ability to initiate or maintain vehicle motion.

## Winter tyres

### WinterContact TS 870 P

For sedans and SUVs

- › Handle your car precisely on snow and ice thanks to its intelligent sipe and pattern concept.
- › Experience excellent wet performance due to a new composition of our CoolChili compound.
- › Benefit from high mileage and low rolling resistance leading to low fuel consumption.
- › Directional tread pattern.



#### Tyre dimensions

|                    |               |
|--------------------|---------------|
| Tyre width in mm   | 195-325       |
| Rim size in inches | 16-22         |
| Speed Symbol       | T / H / V / W |
| Tyre cross-section | series 30-70  |



Also available as SSR runflat tyre.  
See page 26 for further details.



### WinterContact TS 850 P

For mid-sized and luxury vehicles

- › Enhanced snow traction given by the S-GRIP pattern layout.
- › Improved handling on snow due to PrecisionPlus.
- › Reduced stopping distances via ActiveBand.
- › Asymmetrical non-directional tread pattern.



#### Tyre dimensions

|                    |               |
|--------------------|---------------|
| Tyre width in mm   | 155-315       |
| Rim size in inches | 15-22         |
| Speed Symbol       | T / H / V / W |
| Tyre cross-section | series 30-75  |



Also available as SSR runflat tyre, ContiSeal tyre and with noise reducing ContiSilent technology.  
See page 26 - 29 for further details.



The Alpine symbol identifies winter tyres according to UN regulations. The snow performance of these winter tyres has to be proven by objective tests and meet or exceed defined limits. These tyres provide high performance with regards to safety and control on snow and in general on winter road conditions.

## Winter tyres

### WinterContact TS 860 S

For premium sports cars

- › Excellent snow performance for outstanding driving pleasure.
- › Best braking performance for maximum winter safety.
- › Superb dry handling performance for highest steering precision.
- › Exceptional low rolling resistance for reduced fuel consumption.
- › Asymmetrical non-directional tread pattern.



#### Tyre dimensions

|                    |               |
|--------------------|---------------|
| Tyre width in mm   | 195-325       |
| Rim size in inches | 16-23         |
| Speed Symbol       | H / V / W / Y |
| Tyre cross-section | series 30-65  |



Also available as SSR runflat tyre.  
See page 26 for further details.



## SUV Winter tyres

### ContiCrossContact Winter

For SUVs and offroad vehicles

- › Excellent traction and braking performance on snow and wet roads.
- › Brilliant handling on snowy and wet roads.
- › High level of safety protection against aquaplaning.
- › Asymmetrical non-directional tread pattern.



#### Tyre dimensions

|                    |              |
|--------------------|--------------|
| Tyre width in mm   | 175-295      |
| Rim size in inches | 15-21        |
| Speed Symbol       | T / H / V    |
| Tyre cross-section | series 40-75 |



'Snow tyre' means a tyre whose tread pattern, tread compound or structure is primarily designed to perform better in snow conditions than a normal tyre with regard to its ability to initiate or maintain vehicle motion.

Allseason tyres

AllSeasonContact 2

For all vehicle applications



- › Experience increased efficiency due to our advanced material and tread technology.
- › Feel safe in any weather thanks to better handling and braking.
- › Enjoy our new adaptive tread design for a smooth and comfortable driving experience all year round.
- › Directional tread pattern.



| Tyre dimensions    |                   |
|--------------------|-------------------|
| Tyre width in mm   | 165-285           |
| Rim size in inches | 15-21             |
| Speed Symbol       | T / H / V / W / Y |
| Tyre cross-section | series 35-65      |

**A-D** **B-C** **A-B** / 70-73 dB

Also available as ContiSeal tyre.  
See page 28 for further details.



The Alpine symbol identifies winter tyres according to UN regulations. The snow performance of these winter tyres has to be proven by objective tests and meet or exceed defined limits. These tyres provide high performance with regards to safety and control on snow and in general on winter road conditions.

AllSeasonContact

For all vehicle applications



- › Impressive grip on snowy and wet winter roads.
- › Good braking performance on dry and wet summer roads.
- › Best-in-class rolling resistance performance.
- › Directional tread pattern.



| Tyre dimensions    |                       |
|--------------------|-----------------------|
| Tyre width in mm   | 125-275               |
| Rim size in inches | 13-20                 |
| Speed Symbol       | M / T / H / V / W / Y |
| Tyre cross-section | series 35-80          |

**A-E** **B-C** **B** / 70-73 dB

Also available as ContiSeal tyre.  
See page 28 for further details.

M+S

'Snow tyre' means a tyre whose tread pattern, tread compound or structure is primarily designed to perform better in snow conditions than a normal tyre with regard to its ability to initiate or maintain vehicle motion.


## The SSR tyres from Continental - advanced runflat technology.



- › Reduced danger and hassle
- › Drive to safety for up to 80 km (50 miles) of 80 km/h (50 mph)
- › Compatible with standard wheel rims (H 2)
- › No need for a spare wheel and jack

### The secret of SSR.

Continental's SSR tyres use reinforced sidewalls to support the vehicle in the event of a loss of air pressure. SSR technology prevents the side of the flat tyre from being crushed between the road and wheel rim.



Standard tyres

The deflated tyre gets trapped beneath the rim and is destroyed.



SSR runflat tyres

The stable sidewalls support the tyre if it loses air.

### Increased safety thanks to reinforced sidewalls.

SSR tyres allow for a controlled continuation of your journey at a reduced speed of up to a distance of 80 km at a maximum speed of 80 km/h depending on the condition of the roads, the condition of the tyre and the weight of the vehicle.

### Communication between tyre and driver.

As SSR tyres offer a very high standard of driving comfort, the driver will barely notice any loss of pressure in the tyre. For this reason, Continental SSR tyres may only be used on vehicles equipped with a tyre pressure monitoring system, which will display the drop in tyre pressure on the dashboard instrument panel.

### Note:

SSR tyres may only be fitted on vehicles for which they are approved by the vehicle manufacturer and that are equipped with a tyre pressure monitoring system. The tread patterns and sizes available as SSR runflat tyre can be found in the current product range of summer and winter passenger tyres.

As a dealer, you need to get a dedicated training and certification for the professional mounting and removal of SSR tyres:

- Please log in under <https://www.contiacademyonline.com/login/index.php?lang=en> (via Google or Microsoft Edge).
- Select your language and register for a new account (or log in with your username and password).
- You will receive a confirmation mail containing a link for the E-learning.
- Please click the button "Technology", then the trainings SSR Part 1 and 2 can be chosen.
- After the training has been completed, a certificate can be downloaded.



## New general marking for Runflat Tyres

Extended **Mobility Tyres** marking has been introduced as an alternative to the existing marking for **RunFlat** tyres according to UN Reg 30. Please find the differences in the following table.

| Requirements for max runflat distance and speed | until 80 km @ max. 80 km/h (50 mph) |                              |
|-------------------------------------------------|-------------------------------------|------------------------------|
| Product Marking                                 | RF                                  | EMT                          |
| Structure Dimension                             | RUN FLAT<br>205/55 <b>RF</b> 16     | RADIAL<br>205/55 <b>R</b> 16 |
| Additional sidewall marking                     |                                     |                              |
| Mixing with standard tyres on the vehicle       | Not Legal                           | Not Recommended              |

The **EMT-marking** will be used more frequently for future SSR-tyres from Continental.

## ContiSeal

The self-sealing standard production tyre from Continental.



For enhanced mobility and safety, even if a foreign object penetrates the tyre tread.

ContiSeal tyres contain an innovative technology which seals punctures in the tread area. ContiSeal tyres have a sticky, viscous layer in the tread area that instantly seals punctures caused by nails and other objects up to 5 mm in diameter. The layer temporarily seals the vast majority of tyre tread punctures.

The material in the sealant layer prevents air loss even if the penetrating object becomes dislodged. As a result there is no need to stop straight away or change the tyre immediately in the event of a puncture. Despite this, the tyre should be taken as soon as possible to a tyre specialist who can examine it to determine if it needs a permanent repair.

ContiSeal tyres are instantly recognisable by the nail symbol on the sidewall and are compatible with all commonly available wheel rims.

### ContiSeal tyres – the benefits at a glance:

- › punctures in the tread area caused by penetrating objects up to 5 mm in diameter are sealed
- › holes are sealed even if the penetrating object becomes dislodged
- › same high performance under normal driving conditions as non ContiSeal tyres
- › no need to stop straight away or change the tyre

For detailed information about ContiSeal tyres – use, inspection, storing, mouting / demounting, repair, disposal – please see <https://www.continental-tyres.co.uk/b2c/car/continental-tyre-technologies/contiseal.html>



## ContiSilent

The tyre for less interior noise.



- › Reduced interior noise on all road surfaces
- › ContiSilent functions in all weather conditions
- › No change in any other driving characteristics
- › No negative influence on mileage and load / speed capability
- › Same mounting and storage as for standard tyres

### Technical highlights

ContiSilent is a tyre noise-reducing technology developed by Continental. It is designed to reduce interior noise on all road surfaces. ContiSilent tyres are equipped with an inner tyre absorber, a polyurethane foam, attached to the inner surface of the tread area with an adhesive. Regardless of the temperature, the structure of the foam stays intact.

ContiSilent helps reduce interior vehicle noise up to 9 dB(A), depending on the type of vehicle, its speed and the road surface. It is available for summer and winter tyres and is compatible with all commonly available rims. Driving performance is not affected and there is no negative influence on mileage and load / speed capability. Fitting on four positions is recommended.

## ContiSilent principle

### ContiSilent tyre

A ContiSilent tyre contains a polyurethane foam. It is firmly attached to an adhesive layer on the inner surface of the tyre tread area.



### For further information please visit

<https://www.continental-tyres.co.uk/b2c/car/continental-tyre-technologies/contisilent.html>



Standard tyre

VS



ContiSilent tyre



## Continental is well equipped for the requirements of electromobility.



### Rolling resistance

Weight reduction, **innovative rubber compounds** and specific tyre designs can **significantly reduce rolling resistance**.



### Interior noise

**ContiSilent** reduces the sound components of rolling noise perceived as particularly annoying in the vehicle interior **by up to 9dB**.



### Mileage

New **abrasion-resistant rubber** compounds **extend mileage**. **Super-computer driven** research co-operations to drive development even further.



### Extended mobility & functional integration


**ContiSeal** seals 80% of punctures, eliminating need for emergency tyre change. This decreases load and increases **safety and construction space** needed for the battery.



### High Load Capacity

**High Load Index (HL)** for a **higher load-bearing capacity** to handle increased weight of BEVs.

## Continental Tyre Technology is perfectly fit to meet the demands of the future of e-mobility!



Compatible with electric vehicles.

Continental passenger car tyre lines are developed to meet the diverse requirements of combustion engine, hybrid and electric vehicles.



Additionally, the newly introduced product lines will be equipped with the EV-compatible symbol on the sidewall.

To show that Continental tyres are compatible for electric vehicles, the EV-compatible symbol is used in every communication.



| Tyre           |               |                  | Permitted<br>rims <sup>1) 7)</sup><br><br>(measuring<br>rim bold) | Tyre dimensions                                   |                 | Radius <sup>3a)</sup> | Rolling<br>circumference <sup>3)</sup><br><br>(mm) |
|----------------|---------------|------------------|-------------------------------------------------------------------|---------------------------------------------------|-----------------|-----------------------|----------------------------------------------------|
| Size           | Load<br>Index | Load<br>capacity |                                                                   | Max. standard<br>value in operation <sup>2)</sup> |                 | stat.<br>(mm)         |                                                    |
|                | LI            | kg               |                                                                   | Width<br>(mm)                                     | Outer-Ø<br>(mm) |                       |                                                    |
| 80 series      |               |                  |                                                                   |                                                   |                 |                       |                                                    |
| 125/80 R 13    | 65            | 290              | 3.00B <sup>4)</sup>                                               | 126                                               |                 |                       |                                                    |
|                |               |                  | 3.50B <sup>4)</sup>                                               | 131                                               | 538             | 243                   | 1615                                               |
|                |               |                  | 4.00B <sup>4)</sup>                                               | 136                                               |                 |                       |                                                    |
| 135/80 R 13    | 70            | 335              | 3.50B <sup>4)</sup>                                               | 138                                               | 554             | 249                   | 1665                                               |
|                |               |                  | 4.00B <sup>4)</sup>                                               | 143                                               |                 |                       |                                                    |
|                |               |                  | 4.50B <sup>4)</sup>                                               | 148                                               |                 |                       |                                                    |
| 145/80 R 13    | 75            | 387              | 3.50B <sup>4)</sup>                                               | 146                                               |                 |                       |                                                    |
|                |               |                  | 4.00B <sup>4)</sup>                                               | 151                                               | 572             | 255                   | 1715                                               |
|                |               |                  | 4.50B <sup>4)</sup>                                               | 156                                               |                 |                       |                                                    |
|                |               |                  | 5.00B <sup>4)</sup>                                               | 161                                               |                 |                       |                                                    |
| 155/80 R 13    | 79            | 437              | 4.00B <sup>4)</sup>                                               | 158                                               |                 |                       |                                                    |
| 155/80 R 13 XL | 83            | 487              | 4.50B <sup>4)</sup>                                               | 163                                               | 588             | 262                   | 1765                                               |
|                |               |                  | 5.00B <sup>4)</sup>                                               | 168                                               |                 |                       |                                                    |
| 165/80 R 13    | 83            | 487              | 4J                                                                | 167                                               |                 |                       |                                                    |
| 165/80 R 13 XL | 87            | 545              | 4½J                                                               | 172                                               | 604             | 268                   | 1810                                               |
|                |               |                  | 5J                                                                | 177                                               |                 |                       |                                                    |
| 145/80 R 14    | 76            | 400              | 3.50B <sup>4)</sup>                                               | 146                                               |                 |                       |                                                    |
|                |               |                  | 4.00B <sup>4)</sup>                                               | 151                                               | 598             | 268                   | 1795                                               |
|                |               |                  | 4.50B <sup>4)</sup>                                               | 156                                               |                 |                       |                                                    |
|                |               |                  | 5.00B <sup>4)</sup>                                               | 161                                               |                 |                       |                                                    |
| 165/80 R 14    | 85            | 515              | 4J                                                                | 167                                               |                 |                       |                                                    |
|                |               |                  | 4½J                                                               | 172                                               | 630             | 281                   | 1890                                               |
|                |               |                  | 5J                                                                | 177                                               |                 |                       |                                                    |
| 175/80 R 14    | 88            | 560              | 4½J                                                               | 179                                               |                 |                       |                                                    |
|                |               |                  | 5J                                                                | 184                                               | 648             | 287                   | 1940                                               |
|                |               |                  | 5½J                                                               | 189                                               |                 |                       |                                                    |
| 165/80 R 15    | 87            | 545              | 4J                                                                | 167                                               |                 |                       |                                                    |
|                |               |                  | 4½J                                                               | 172                                               | 655             | 293                   | 1965                                               |
|                |               |                  | 5J                                                                | 177                                               |                 |                       |                                                    |
| 195/80 R 15    | 96            | 710              | 5J                                                                | 199                                               |                 |                       |                                                    |
|                |               |                  | 5½J                                                               | 204                                               | 705             | 312                   | 2115                                               |
|                |               |                  | 6J                                                                | 209                                               |                 |                       |                                                    |
| 215/80 R 15    | 102           | 850              | 5½J                                                               | 220                                               |                 |                       |                                                    |
|                |               |                  | 6J                                                                | 225                                               | 739             | 325                   | 2210                                               |
|                |               |                  | 6½J                                                               | 230                                               |                 |                       |                                                    |
|                |               |                  | 7J                                                                | 235                                               |                 |                       |                                                    |

| Tyre           |               |                  | Permitted<br>rims <sup>1) 7)</sup><br><br>(measuring<br>rim bold) | Tyre dimensions<br>Max. standard<br>value in operation <sup>2)</sup> |                 | Radius <sup>3a)</sup> | Rolling<br>circumference <sup>3)</sup> |
|----------------|---------------|------------------|-------------------------------------------------------------------|----------------------------------------------------------------------|-----------------|-----------------------|----------------------------------------|
| Size           | Load<br>Index | Load<br>capacity |                                                                   | Width<br>(mm)                                                        | Outer-Ø<br>(mm) | stat.<br>(mm)         | (mm)                                   |
|                | LI            | kg               |                                                                   |                                                                      |                 |                       |                                        |
| 80 series      |               |                  |                                                                   |                                                                      |                 |                       |                                        |
| 205/80 R 16 XL | 104           | 900              | 5J                                                                | 206                                                                  |                 |                       |                                        |
|                |               |                  | 5½J                                                               | 211                                                                  | 748             | 331                   | 2240                                   |
|                |               |                  | 6J                                                                | 216                                                                  |                 |                       |                                        |
|                |               |                  | 6½J                                                               | 221                                                                  |                 |                       |                                        |
| 75 series      |               |                  |                                                                   |                                                                      |                 |                       |                                        |
| 215/75 R 15    | 100           | 800              | 5½J                                                               | 220                                                                  |                 |                       |                                        |
|                |               |                  | 6J                                                                | 225                                                                  | 715             | 316                   | 2145                                   |
|                |               |                  | 6½J                                                               | 230                                                                  |                 |                       |                                        |
|                |               |                  | 7J                                                                | 235                                                                  |                 |                       |                                        |
| 225/75 R 15    | 102           | 850              | 6J                                                                | 232                                                                  | 733             | 322                   | 2195                                   |
|                |               |                  | 6½J                                                               | 237                                                                  |                 |                       |                                        |
|                |               |                  | 7J                                                                | 242                                                                  |                 |                       |                                        |
| 235/75 R 15 XL | 109           | 1030             | 6J                                                                | 239                                                                  |                 |                       |                                        |
|                |               |                  | 6½J                                                               | 244                                                                  | 747             | 328                   | 2235                                   |
|                |               |                  | 7J                                                                | 249                                                                  |                 |                       |                                        |
|                |               |                  | 7½J                                                               | 254                                                                  |                 |                       |                                        |
|                |               |                  | 8J                                                                | 259                                                                  |                 |                       |                                        |
| 225/75 R 16    | 104           | 900              | 6J                                                                | 232                                                                  | 758             | 335                   | 2270                                   |
| 225/75 R 16 XL | 108           | 1000             | 6½J                                                               | 237                                                                  |                 |                       |                                        |
|                |               |                  | 7J                                                                | 242                                                                  |                 |                       |                                        |
| 235/75 R 16 XL | 112           | 1120             | 6J                                                                | 239                                                                  |                 |                       |                                        |
|                |               |                  | 6½J                                                               | 244                                                                  | 772             | 340                   | 2310                                   |
|                |               |                  | 7J                                                                | 249                                                                  |                 |                       |                                        |
|                |               |                  | 7½J                                                               | 254                                                                  |                 |                       |                                        |
|                |               |                  | 8J                                                                | 259                                                                  |                 |                       |                                        |
| 245/75 R 16    | 111           | 1090             | 6½J                                                               | 253                                                                  |                 |                       |                                        |
|                |               |                  | 7J                                                                | 258                                                                  | 788             | 347                   | 2360                                   |
|                |               |                  | 7½J                                                               | 263                                                                  |                 |                       |                                        |
| 70 series      |               |                  |                                                                   |                                                                      |                 |                       |                                        |
| 145/70 R 13    | 71            | 345              | 3.50B <sup>4)</sup>                                               | 146                                                                  |                 |                       |                                        |
|                |               |                  | 4.00B <sup>4)</sup>                                               | 151                                                                  |                 |                       |                                        |
|                |               |                  | 4.50B <sup>4)</sup>                                               | 156                                                                  | 542             | 245                   | 1630                                   |
|                |               |                  | 5.00B <sup>4)</sup>                                               | 161                                                                  |                 |                       |                                        |
| 155/70 R 13    | 75            | 387              | 4.00B <sup>4)</sup>                                               | 158                                                                  |                 |                       |                                        |
|                |               |                  | 4.50B <sup>4)</sup>                                               | 163                                                                  | 556             | 250                   | 1670                                   |
|                |               |                  | 5.00B <sup>4)</sup>                                               | 168                                                                  |                 |                       |                                        |

| Tyre           |               |                  | Permitted<br>rims <sup>1) 7)</sup><br><br>(measuring<br>rim bold) | Tyre dimensions                                   |                 | Radius <sup>3a)</sup> | Rolling<br>circumference <sup>3)</sup> |
|----------------|---------------|------------------|-------------------------------------------------------------------|---------------------------------------------------|-----------------|-----------------------|----------------------------------------|
| Size           | Load<br>Index | Load<br>capacity |                                                                   | Max. standard<br>value in operation <sup>2)</sup> |                 | stat.<br>(mm)         |                                        |
|                | LI            | kg               |                                                                   | Width<br>(mm)                                     | Outer-Ø<br>(mm) |                       |                                        |
| 70 series      |               |                  |                                                                   |                                                   |                 |                       |                                        |
| 165/70 R 13    | 79            | 437              | 4J                                                                | 167                                               |                 |                       |                                        |
| 165/70 R 13 XL | 83            | 487              | 4.50B <sup>4)</sup>                                               | 172                                               |                 |                       |                                        |
|                |               |                  | 5.00B <sup>4)</sup>                                               | 177                                               | 572             | 255                   | 1715                                   |
|                |               |                  | 5½J                                                               | 182                                               |                 |                       |                                        |
| 175/70 R 13    | 82            | 475              | 4½J                                                               | 179                                               |                 |                       |                                        |
|                |               |                  | 5J                                                                | 184                                               | 586             | 261                   | 1755                                   |
|                |               |                  | 5½J                                                               | 189                                               |                 |                       |                                        |
| 185/70 R 13    | 86            | 530              | 5J                                                                | 192                                               |                 |                       |                                        |
|                |               |                  | 5½J                                                               | 197                                               | 600             | 266                   | 1800                                   |
|                |               |                  | 6J                                                                | 202                                               |                 |                       |                                        |
| 155/70 R 14    | 77            | 412              | 4.00B <sup>4)</sup>                                               | 158                                               |                 |                       |                                        |
|                |               |                  | 4.50B <sup>4)</sup>                                               | 163                                               | 582             | 263                   | 1750                                   |
|                |               |                  | 5.00B <sup>4)</sup>                                               | 168                                               |                 |                       |                                        |
| 165/70 R 14    | 81            | 462              | 4J                                                                | 167                                               |                 |                       |                                        |
| 165/70 R 14 XL | 85            | 515              | 4½J                                                               | 172                                               |                 |                       |                                        |
|                |               |                  | 5J                                                                | 177                                               | 598             | 268                   | 1795                                   |
|                |               |                  | 5½J                                                               | 182                                               |                 |                       |                                        |
| 175/70 R 14    | 84            | 500              | 4½J                                                               | 179                                               |                 |                       |                                        |
| 175/70 R 14 XL | 88            | 560              | 5J                                                                | 184                                               | 612             | 274                   | 1835                                   |
|                |               |                  | 5½J                                                               | 189                                               |                 |                       |                                        |
| 185/70 R 14    | 88            | 560              | 5J                                                                | 192                                               |                 |                       |                                        |
| 185/70 R 14 XL | 92            | 630              | 5½J                                                               | 197                                               | 626             | 279                   | 1880                                   |
|                |               |                  | 6J                                                                | 202                                               |                 |                       |                                        |
| 195/70 R 14    | 91            | 615              | 5J                                                                | 199                                               |                 |                       |                                        |
|                |               |                  | 5½J                                                               | 204                                               |                 |                       |                                        |
|                |               |                  | 6J                                                                | 209                                               | 640             | 285                   | 1920                                   |
|                |               |                  | 6½J                                                               | 214                                               |                 |                       |                                        |
| 205/70 R 14 XL | 98            | 750              | 5½J                                                               | 212                                               |                 |                       |                                        |
|                |               |                  | 6J                                                                | 217                                               | 656             | 290                   | 1965                                   |
|                |               |                  | 6½J                                                               | 222                                               |                 |                       |                                        |
| 135/70 R 15    | 70            | 335              | 3.50B <sup>4)</sup>                                               | 139                                               |                 |                       |                                        |
|                |               |                  | 4.00B <sup>4)</sup>                                               | 144                                               | 579             | 265                   | 1740                                   |
|                |               |                  | 4.50B <sup>4)</sup>                                               | 149                                               |                 |                       |                                        |

| Tyre           |               |                  | Permitted<br>rims <sup>1) 7)</sup><br><br>(measuring<br>rim bold) | Tyre dimensions                                   |                 | Radius <sup>3a)</sup> | Rolling<br>circumference <sup>3)</sup><br><br>(mm) |
|----------------|---------------|------------------|-------------------------------------------------------------------|---------------------------------------------------|-----------------|-----------------------|----------------------------------------------------|
| Size           | Load<br>Index | Load<br>capacity |                                                                   | Max. standard<br>value in operation <sup>2)</sup> |                 | stat.<br>(mm)         |                                                    |
|                | LI            | kg               |                                                                   | Width<br>(mm)                                     | Outer-Ø<br>(mm) |                       |                                                    |
| 70 series      |               |                  |                                                                   |                                                   |                 |                       |                                                    |
| 195/70 R 15 XL | 97            | 730              | 5J                                                                | 199                                               |                 |                       |                                                    |
|                |               |                  | 5½J                                                               | 204                                               |                 |                       |                                                    |
|                |               |                  | 6J                                                                | 209                                               | 665             | 297                   | 2000                                               |
|                |               |                  | 6½J                                                               | 214                                               |                 |                       |                                                    |
| 205/70 R 15    | 96            | 710              | 5½J                                                               | 212                                               |                 |                       |                                                    |
| 205/70 R 15 XL | 100           | 800              | 6J                                                                | 217                                               | 681             | 303                   | 2040                                               |
|                |               |                  | 6½J                                                               | 222                                               |                 |                       |                                                    |
| 225/70 R 15    | 100           | 800              | 6J                                                                | 232                                               |                 |                       |                                                    |
|                |               |                  | 6½J                                                               | 237                                               | 709             | 314                   | 2125                                               |
|                |               |                  | 7J                                                                | 242                                               |                 |                       |                                                    |
| 255/70 R 15    | 108           | 1000             | 7J                                                                | 265                                               |                 |                       |                                                    |
| 255/70 R 15 XL | 112           | 1120             | 7½J                                                               | 270                                               | 753             | 330                   | 2255                                               |
|                |               |                  | 8J                                                                | 275                                               |                 |                       |                                                    |
| 265/70 R 15    | 112           | 1120             | 7J                                                                | 273                                               |                 |                       |                                                    |
|                |               |                  | 7½J                                                               | 278                                               |                 |                       |                                                    |
|                |               |                  | 8J                                                                | 283                                               | 767             | 336                   | 2295                                               |
|                |               |                  | 8½J                                                               | 288                                               |                 |                       |                                                    |
| 195/70 R 16    | 94            | 670              | 5J                                                                | 199                                               |                 |                       |                                                    |
|                |               |                  | 5½J                                                               | 204                                               |                 |                       |                                                    |
|                |               |                  | 6J                                                                | 209                                               | 690             | 310                   | 2075                                               |
|                |               |                  | 6½J                                                               | 214                                               |                 |                       |                                                    |
| 205/70 R 16    | 97            | 730              | 5½J                                                               | 212                                               |                 |                       |                                                    |
|                |               |                  | 6J                                                                | 217                                               | 706             | 315                   | 2115                                               |
|                |               |                  | 6½J                                                               | 222                                               |                 |                       |                                                    |
| 215/70 R 16    | 100           | 800              | 5½J                                                               | 220                                               |                 |                       |                                                    |
| 215/70 R 16 XL | 104           | 900              | 6J                                                                | 225                                               |                 |                       |                                                    |
|                |               |                  | 6½J                                                               | 230                                               | 720             | 321                   | 2160                                               |
|                |               |                  | 7J                                                                | 235                                               |                 |                       |                                                    |
| 225/70 R 16    | 103           | 875              | 6J                                                                | 232                                               |                 |                       |                                                    |
| 225/70 R 16 XL | 107           | 975              | 6½J                                                               | 237                                               | 734             | 326                   | 2200                                               |
|                |               |                  | 7J                                                                | 242                                               |                 |                       |                                                    |
| 235/70 R 16    | 106           | 950              | 6J                                                                | 240                                               |                 |                       |                                                    |
|                |               |                  | 6½J                                                               | 245                                               |                 |                       |                                                    |
|                |               |                  | 7J                                                                | 250                                               | 750             | 332                   | 2245                                               |
|                |               |                  | 7½J                                                               | 255                                               |                 |                       |                                                    |
|                |               |                  | 8J                                                                | 260                                               |                 |                       |                                                    |

| Tyre           |               |                  | Permitted<br>rims <sup>1) 7)</sup><br><br>(measuring<br>rim bold) | Tyre dimensions                                   |                 | Radius <sup>3a)</sup> | Rolling<br>circumference <sup>3)</sup><br><br>(mm) |
|----------------|---------------|------------------|-------------------------------------------------------------------|---------------------------------------------------|-----------------|-----------------------|----------------------------------------------------|
| Size           | Load<br>Index | Load<br>capacity |                                                                   | Max. standard<br>value in operation <sup>2)</sup> |                 | stat.<br>(mm)         |                                                    |
|                | LI            | kg               |                                                                   | Width<br>(mm)                                     | Outer-Ø<br>(mm) |                       |                                                    |
| 70 series      |               |                  |                                                                   |                                                   |                 |                       |                                                    |
| 245/70 R 16    | 107           | 975              | 6½J                                                               | 253                                               |                 |                       |                                                    |
| 245/70 R 16 XL | 111           | 1090             | 7J                                                                | 258                                               | 764             | 337                   | 2290                                               |
|                |               |                  | 7½J                                                               | 263                                               |                 |                       |                                                    |
| 255/70 R 16    | 111           | 1090             | 7J                                                                | 265                                               |                 |                       |                                                    |
| 255/70 R 16 XL | 115           | 1215             | 7½J                                                               | 270                                               | 778             | 343                   | 2330                                               |
|                |               |                  | 8J                                                                | 275                                               |                 |                       |                                                    |
| 265/70 R 16    | 112           | 1120             | 7J                                                                | 273                                               |                 |                       |                                                    |
|                |               |                  | 7½J                                                               | 278                                               |                 |                       |                                                    |
|                |               |                  | 8J                                                                | 283                                               | 792             | 348                   | 2375                                               |
|                |               |                  | 8½J                                                               | 288                                               |                 |                       |                                                    |
| 245/70 R 17    | 110           | 1060             | 6½J                                                               | 253                                               |                 |                       |                                                    |
| 245/70 R 17 XL | 114           | 1180             | 7J                                                                | 258                                               | 790             | 350                   | 2365                                               |
|                |               |                  | 7½J                                                               | 263                                               |                 |                       |                                                    |
| 255/70 R 17    | 112           | 1120             | 7J                                                                | 265                                               |                 |                       |                                                    |
|                |               |                  | 7½J                                                               | 270                                               | 804             | 356                   | 2410                                               |
|                |               |                  | 8J                                                                | 275                                               |                 |                       |                                                    |
| 265/70 R 17    | 115           | 1215             | 7J                                                                | 273                                               |                 |                       |                                                    |
| 265/70 R 17 XL | 116           | 1250             | 7½J                                                               | 278                                               |                 |                       |                                                    |
|                |               |                  | 8J                                                                | 283                                               | 818             | 361                   | 2450                                               |
|                |               |                  | 8½J                                                               | 288                                               |                 |                       |                                                    |
| 235/70 R 18 XL | 110           | 1060             | 6J                                                                | 240                                               |                 |                       |                                                    |
|                |               |                  | 6½J                                                               | 245                                               |                 |                       |                                                    |
|                |               |                  | 7J                                                                | 250                                               | 801             | 357                   | 2400                                               |
|                |               |                  | 7½J                                                               | 255                                               |                 |                       |                                                    |
| 265/70 R 18    | 116           | 1250             | 8J                                                                | 260                                               |                 |                       |                                                    |
|                |               |                  | 7J                                                                | 273                                               |                 |                       |                                                    |
|                |               |                  | 7½J                                                               | 278                                               |                 |                       |                                                    |
|                |               |                  | 8J                                                                | 283                                               | 843             | 374                   | 2530                                               |
| 265/70 R 18    |               |                  | 8½J                                                               | 288                                               |                 |                       |                                                    |
|                |               |                  |                                                                   |                                                   |                 |                       |                                                    |
|                |               |                  |                                                                   |                                                   |                 |                       |                                                    |
|                |               |                  |                                                                   |                                                   |                 |                       |                                                    |
| 155/70 R 19    | 84            | 500              | 4.00B <sup>4)</sup>                                               | 158                                               |                 |                       |                                                    |
| 155/70 R 19 XL | 88            | 560              | 4.50B <sup>4)</sup>                                               | 163                                               | 709             | 327                   | 2140                                               |
|                |               |                  | 5.00B <sup>4)</sup>                                               | 168                                               |                 |                       |                                                    |
| 65 series      |               |                  |                                                                   |                                                   |                 |                       |                                                    |
| 155/65 R 13    | 73            | 365              | 4.50B <sup>4)</sup>                                               | 163                                               | 540             | 244                   | 1625                                               |
|                |               |                  | 5.00B <sup>4)</sup>                                               | 168                                               |                 |                       |                                                    |
|                |               |                  | 5.50B <sup>4)</sup>                                               | 173                                               |                 |                       |                                                    |

| Tyre           |               |                  | Permitted<br>rims <sup>1) 7)</sup><br><br>(measuring<br>rim bold) | Tyre dimensions                                   |                 | Radius <sup>3a)</sup> | Rolling<br>circumference <sup>3)</sup><br><br>(mm) |
|----------------|---------------|------------------|-------------------------------------------------------------------|---------------------------------------------------|-----------------|-----------------------|----------------------------------------------------|
| Size           | Load<br>Index | Load<br>capacity |                                                                   | Max. standard<br>value in operation <sup>2)</sup> |                 | stat.<br>(mm)         |                                                    |
|                | LI            | kg               |                                                                   | Width<br>(mm)                                     | Outer-Ø<br>(mm) |                       |                                                    |
| 65 series      |               |                  |                                                                   |                                                   |                 |                       |                                                    |
| 165/65 R 13    | 77            | 412              | 4.50B <sup>4)</sup>                                               | 172                                               |                 |                       |                                                    |
|                |               |                  | 5.00B <sup>4)</sup>                                               | 177                                               | 552             | 248                   | 1660                                               |
|                |               |                  | 5.50B <sup>4)</sup>                                               | 182                                               |                 |                       |                                                    |
|                |               |                  | 6.00B <sup>4)</sup>                                               | 187                                               |                 |                       |                                                    |
| 175/65 R 13    | 80            | 450              | 5J                                                                | 184                                               | 568             | 254                   | 1700                                               |
|                |               |                  | 5½J                                                               | 189                                               |                 |                       |                                                    |
| 155/65 R 14    | 75            | 387              | 4.50B <sup>4)</sup>                                               | 163                                               | 566             | 257                   | 1700                                               |
| 155/65 R 14 XL | 79            | 437              | 5.00B <sup>4)</sup>                                               | 168                                               |                 |                       |                                                    |
|                |               |                  | 5.50B <sup>4)</sup>                                               | 173                                               |                 |                       |                                                    |
| 165/65 R 14    | 79            | 437              | 4.50B <sup>4)</sup>                                               | 172                                               |                 |                       |                                                    |
| 165/65 R 14 XL | 83            | 487              | 5.00B <sup>4)</sup>                                               | 177                                               | 578             | 261                   | 1740                                               |
|                |               |                  | 5.50B <sup>4)</sup>                                               | 182                                               |                 |                       |                                                    |
|                |               |                  | 6J                                                                | 187                                               |                 |                       |                                                    |
| 175/65 R 14    | 82            | 475              | 5J                                                                | 184                                               | 594             | 267                   | 1780                                               |
| 175/65 R 14 XL | 86            | 530              | 5½J                                                               | 189                                               |                 |                       |                                                    |
| 185/65 R 14    | 86            | 530              | 5J                                                                | 192                                               |                 |                       |                                                    |
| 185/65 R 14 XL | 90            | 600              | 5½J                                                               | 197                                               | 606             | 272                   | 1820                                               |
|                |               |                  | 6J                                                                | 202                                               |                 |                       |                                                    |
| 195/65 R 14    | 89            | 580              | 5½J                                                               | 204                                               |                 |                       |                                                    |
|                |               |                  | 6J                                                                | 209                                               | 620             | 277                   | 1860                                               |
|                |               |                  | 6½J                                                               | 214                                               |                 |                       |                                                    |
| 145/65 R 15    | 72            | 355              | 4J                                                                | 151                                               |                 |                       |                                                    |
|                |               |                  | 4½J                                                               | 156                                               | 577             | 264                   | 1735                                               |
|                |               |                  | 5J                                                                | 161                                               |                 |                       |                                                    |
| 155/65 R 15    | 77            | 412              | 4½J                                                               | 163                                               | 591             | 269                   | 1780                                               |
|                |               |                  | 5J                                                                | 168                                               |                 |                       |                                                    |
|                |               |                  | 5½J                                                               | 173                                               |                 |                       |                                                    |
| 165/65 R 15    | 81            | 462              | 4½J                                                               | 172                                               |                 |                       |                                                    |
|                |               |                  | 5J                                                                | 177                                               | 603             | 274                   | 1815                                               |
|                |               |                  | 5½J                                                               | 182                                               |                 |                       |                                                    |
|                |               |                  | 6J                                                                | 187                                               |                 |                       |                                                    |
| 175/65 R 15    | 84            | 500              | 5J                                                                | 184                                               | 619             | 279                   | 1855                                               |
| 175/65 R 15 XL | 88            | 560              | 5½J                                                               | 189                                               |                 |                       |                                                    |
| 185/65 R 15    | 88            | 560              | 5J                                                                | 192                                               |                 |                       |                                                    |
| 185/65 R 15 XL | 92            | 630              | 5½J                                                               | 197                                               | 631             | 284                   | 1895                                               |
|                |               |                  | 6J                                                                | 202                                               |                 |                       |                                                    |

| Size           | Tyre          |                  | Permitted<br>rims <sup>1) 7)</sup><br><br>(measuring<br>rim bold) | Tyre dimensions<br>Max. standard<br>value in operation <sup>2)</sup> |                 | Radius <sup>3a)</sup> | Rolling<br>circumference <sup>3)</sup> |
|----------------|---------------|------------------|-------------------------------------------------------------------|----------------------------------------------------------------------|-----------------|-----------------------|----------------------------------------|
|                | Load<br>Index | Load<br>capacity |                                                                   | Width<br>(mm)                                                        | Outer-Ø<br>(mm) | stat.<br>(mm)         | (mm)                                   |
|                | LI            | kg               |                                                                   |                                                                      |                 |                       |                                        |
| 65 series      |               |                  |                                                                   |                                                                      |                 |                       |                                        |
| 195/65 R 15    | 91            | 615              | 5½J                                                               | 204                                                                  |                 |                       |                                        |
| 195/65 R 15 XL | 95            | 690              | 6J                                                                | 209                                                                  | 645             | 290                   | 1935                                   |
|                |               |                  | 6½J                                                               | 214                                                                  |                 |                       |                                        |
| 205/65 R 15    | 94            | 670              | 5½J                                                               | 212                                                                  |                 |                       |                                        |
| 205/65 R 15 XL | 99            | 775              | 6J                                                                | 217                                                                  | 657             | 294                   | 1975                                   |
|                |               |                  | 6½J                                                               | 222                                                                  |                 |                       |                                        |
| 215/65 R 15    | 96            | 710              | 6J                                                                | 225                                                                  |                 |                       |                                        |
|                |               |                  | 6½J                                                               | 230                                                                  | 673             | 300                   | 2015                                   |
|                |               |                  | 7J                                                                | 235                                                                  |                 |                       |                                        |
| 185/65 R 16    | 89            | 580              | 5J                                                                | 192                                                                  |                 |                       |                                        |
|                |               |                  | 5½J                                                               | 197                                                                  | 656             | 297                   | 1970                                   |
|                |               |                  | 6J                                                                | 202                                                                  |                 |                       |                                        |
| 195/65 R 16    | 92            | 630              | 5½J                                                               | 204                                                                  |                 |                       |                                        |
|                |               |                  | 6J                                                                | 209                                                                  | 670             | 302                   | 2015                                   |
|                |               |                  | 6½J                                                               | 214                                                                  |                 |                       |                                        |
| 205/65 R 16    | 95            | 690              | 5½J                                                               | 212                                                                  |                 |                       |                                        |
| 205/65 R 16 XL | 99            | 775              | 6J                                                                | 217                                                                  | 682             | 307                   | 2050                                   |
|                |               |                  | 6½J                                                               | 222                                                                  |                 |                       |                                        |
| 215/65 R 16    | 98            | 750              | 6J                                                                | 225                                                                  |                 |                       |                                        |
| 215/65 R 16 XL | 102           | 850              | 6½J                                                               | 230                                                                  | 698             | 312                   | 2090                                   |
|                |               |                  | 7J                                                                | 235                                                                  |                 |                       |                                        |
| 255/65 R 16    | 109           | 1030             | 7J                                                                | 265                                                                  |                 |                       |                                        |
|                |               |                  | 7½J                                                               | 270                                                                  | 752             | 332                   | 2250                                   |
|                |               |                  | 8J                                                                | 275                                                                  |                 |                       |                                        |
|                |               |                  | 8½J                                                               | 280                                                                  |                 |                       |                                        |
|                |               |                  | 9J                                                                | 285                                                                  |                 |                       |                                        |
| 175/65 R 17    | 87            | 545              | 5J                                                                | 184                                                                  | 670             | 305                   | 2015                                   |
|                |               |                  | 5½J                                                               | 189                                                                  |                 |                       |                                        |
| 205/65 R 17    | 96            | 710              | 5½J                                                               | 212                                                                  |                 |                       |                                        |
| 205/65 R 17 XL | 100           | 800              | 6J                                                                | 217                                                                  | 708             | 320                   | 2130                                   |
|                |               |                  | 6½J                                                               | 222                                                                  |                 |                       |                                        |
| 215/65 R 17    | 99            | 775              | 6J                                                                | 225                                                                  |                 |                       |                                        |
| 215/65 R 17 XL | 103           | 875              | 6½J                                                               | 230                                                                  | 724             | 325                   | 2170                                   |
|                |               |                  | 7J                                                                | 235                                                                  |                 |                       |                                        |

| Tyre           |               |                  | Permitted<br>rims <sup>1) 7)</sup><br><br>(measuring<br>rim bold) | Tyre dimensions<br>Max. standard<br>value in operation <sup>2)</sup> |                 | Radius <sup>3a)</sup> | Rolling<br>circumference <sup>3)</sup> |
|----------------|---------------|------------------|-------------------------------------------------------------------|----------------------------------------------------------------------|-----------------|-----------------------|----------------------------------------|
| Size           | Load<br>Index | Load<br>capacity |                                                                   | Width<br>(mm)                                                        | Outer-Ø<br>(mm) | stat.<br>(mm)         | (mm)                                   |
|                | LI            | kg               |                                                                   |                                                                      |                 |                       |                                        |
| 65 series      |               |                  |                                                                   |                                                                      |                 |                       |                                        |
| 225/65 R 17    | 102           | 850              | 6J                                                                | 232                                                                  |                 |                       |                                        |
| 225/65 R 17 XL | 106           | 950              | 6½J                                                               | 237                                                                  | 736             | 330                   | 2210                                   |
|                |               |                  | 7J                                                                | 242                                                                  |                 |                       |                                        |
| 235/65 R 17    | 104           | 900              | 6½J                                                               | 245                                                                  |                 |                       |                                        |
| 235/65 R 17 XL | 108           | 1000             | 7J                                                                | 250                                                                  | 750             | 335                   | 2250                                   |
|                |               |                  | 7½J                                                               | 255                                                                  |                 |                       |                                        |
| 245/65 R 17    | 107           | 975              | 7J                                                                | 258                                                                  | 762             | 340                   | 2290                                   |
| 245/65 R 17 XL | 111           | 1090             | 7½J                                                               | 263                                                                  |                 |                       |                                        |
|                |               |                  | 8J                                                                | 268                                                                  |                 |                       |                                        |
|                |               |                  | 8½J                                                               | 273                                                                  |                 |                       |                                        |
| 255/65 R 17    | 110           | 1060             | 7J                                                                | 265                                                                  |                 |                       |                                        |
| 255/65 R 17 XL | 114           | 1180             | 7½J                                                               | 270                                                                  | 778             | 345                   | 2330                                   |
|                |               |                  | 8J                                                                | 275                                                                  |                 |                       |                                        |
|                |               |                  | 8½J                                                               | 280                                                                  |                 |                       |                                        |
|                |               |                  | 9J                                                                | 285                                                                  |                 |                       |                                        |
| 265/65 R 17    | 112           | 1120             | 7½J                                                               | 278                                                                  |                 |                       |                                        |
| 265/65 R 17 XL | 116           | 1250             | 8J                                                                | 283                                                                  | 790             | 350                   | 2365                                   |
|                |               |                  | 8½J                                                               | 288                                                                  |                 |                       |                                        |
|                |               |                  | 9J                                                                | 293                                                                  |                 |                       |                                        |
|                |               |                  | 9½J                                                               | 298                                                                  |                 |                       |                                        |
| 275/65 R 17    | 115           | 1215             | 7½J                                                               | 285                                                                  |                 |                       |                                        |
|                |               |                  | 8J                                                                | 290                                                                  | 804             | 356                   | 2410                                   |
|                |               |                  | 8½J                                                               | 295                                                                  |                 |                       |                                        |
|                |               |                  | 9J                                                                | 300                                                                  |                 |                       |                                        |
|                |               |                  | 9½J                                                               | 305                                                                  |                 |                       |                                        |
| 285/65 R 17    | 116           | 1250             | 8J                                                                | 299                                                                  |                 |                       |                                        |
|                |               |                  | 8½J                                                               | 304                                                                  | 816             | 360                   | 2445                                   |
|                |               |                  | 9J                                                                | 309                                                                  |                 |                       |                                        |
|                |               |                  | 9½J                                                               | 314                                                                  |                 |                       |                                        |
|                |               |                  | 10J                                                               | 319                                                                  |                 |                       |                                        |
| 235/65 R 18    | 106           | 950              | 6½J                                                               | 245                                                                  |                 |                       |                                        |
| 235/65 R 18 XL | 110           | 1060             | 7J                                                                | 250                                                                  | 775             | 348                   | 2325                                   |
|                |               |                  | 7½J                                                               | 255                                                                  |                 |                       |                                        |

| Size           | Tyre          |                  | Permitted<br>rims <sup>(1) (7)</sup><br><br>(measuring<br>rim bold) | Tyre dimensions<br>Max. standard<br>value in operation <sup>2)</sup> |                 | Radius <sup>3a)</sup><br><br>stat.<br>(mm) | Rolling<br>circumference <sup>3)</sup><br><br>(mm) |
|----------------|---------------|------------------|---------------------------------------------------------------------|----------------------------------------------------------------------|-----------------|--------------------------------------------|----------------------------------------------------|
|                | Load<br>Index | Load<br>capacity |                                                                     | Width<br>(mm)                                                        | Outer-Ø<br>(mm) |                                            |                                                    |
|                | LI            | kg               |                                                                     |                                                                      |                 |                                            |                                                    |
| 65 series      |               |                  |                                                                     |                                                                      |                 |                                            |                                                    |
| 255/65 R 18    | 111           | 1090             | 7J                                                                  | 265                                                                  |                 |                                            |                                                    |
| 255/65 R 18 XL | 115           | 1215             | 7½J                                                                 | 270                                                                  | 803             | 358                                        | 2405                                               |
|                |               |                  | 8J                                                                  | 275                                                                  |                 |                                            |                                                    |
|                |               |                  | 8½J                                                                 | 280                                                                  |                 |                                            |                                                    |
|                |               |                  | 9J                                                                  | 285                                                                  |                 |                                            |                                                    |
| 265/65 R 18    | 114           | 1180             | 7½J                                                                 | 278                                                                  |                 |                                            |                                                    |
|                |               |                  | 8J                                                                  | 283                                                                  | 815             | 363                                        | 2445                                               |
|                |               |                  | 8½J                                                                 | 288                                                                  |                 |                                            |                                                    |
|                |               |                  | 9J                                                                  | 293                                                                  |                 |                                            |                                                    |
|                |               |                  | 9½J                                                                 | 298                                                                  |                 |                                            |                                                    |
| 275/65 R 18 XL | 116           | 1250             | 7½J                                                                 | 285                                                                  |                 |                                            |                                                    |
|                |               |                  | 8J                                                                  | 290                                                                  | 829             | 368                                        | 2485                                               |
|                |               |                  | 8½J                                                                 | 295                                                                  |                 |                                            |                                                    |
|                |               |                  | 9J                                                                  | 300                                                                  |                 |                                            |                                                    |
|                |               |                  | 9½J                                                                 | 305                                                                  |                 |                                            |                                                    |
| 235/65 R 19 XL | 109           | 1030             | 6½J                                                                 | 245                                                                  |                 |                                            |                                                    |
|                |               |                  | 7J                                                                  | 250                                                                  | 801             | 361                                        | 2405                                               |
|                |               |                  | 7½J                                                                 | 255                                                                  |                 |                                            |                                                    |
| 255/65 R 19 XL | 114           | 1180             | 7J                                                                  | 265                                                                  |                 |                                            |                                                    |
|                |               |                  | 7½J                                                                 | 270                                                                  | 829             | 371                                        | 2485                                               |
|                |               |                  | 8J                                                                  | 275                                                                  |                 |                                            |                                                    |
|                |               |                  | 8½J                                                                 | 280                                                                  |                 |                                            |                                                    |
|                |               |                  | 9J                                                                  | 285                                                                  |                 |                                            |                                                    |
| 60 series      |               |                  |                                                                     |                                                                      |                 |                                            |                                                    |
| 165/60 R 14    | 75            | 387              | 4½J                                                                 | 172                                                                  |                 |                                            |                                                    |
| 165/60 R 14 XL | 79            | 437              | 5.00B <sup>4)</sup>                                                 | 177                                                                  | 562             | 255                                        | 1690                                               |
|                |               |                  | 5½J                                                                 | 182                                                                  |                 |                                            |                                                    |
|                |               |                  | 6J                                                                  | 187                                                                  |                 |                                            |                                                    |
| 175/60 R 14    | 79            | 437              | 5.00B <sup>4)</sup>                                                 | 184                                                                  | 574             | 260                                        | 1725                                               |
|                |               |                  | 5½J                                                                 | 189                                                                  |                 |                                            |                                                    |
|                |               |                  | 6J                                                                  | 194                                                                  |                 |                                            |                                                    |
| 185/60 R 14    | 82            | 475              | 5½J                                                                 | 197                                                                  | 586             | 265                                        | 1765                                               |
| 185/60 R 14 XL | 86            | 530              | 6J                                                                  | 202                                                                  |                 |                                            |                                                    |
| 195/60 R 14    | 86            | 530              | 5½J                                                                 | 204                                                                  |                 |                                            |                                                    |
|                |               |                  | 6J                                                                  | 209                                                                  | 600             | 269                                        | 1800                                               |
|                |               |                  | 6½J                                                                 | 214                                                                  |                 |                                            |                                                    |

| Size           | Tyre          |                  | Permitted<br>rims <sup>1) 7)</sup><br><br>(measuring<br>rim bold) | Tyre dimensions<br>Max. standard<br>value in operation <sup>2)</sup> |                 | Radius <sup>3a)</sup><br><br>stat.<br>(mm) | Rolling<br>circumference<br><br>(mm) |
|----------------|---------------|------------------|-------------------------------------------------------------------|----------------------------------------------------------------------|-----------------|--------------------------------------------|--------------------------------------|
|                | Load<br>Index | Load<br>capacity |                                                                   | Width<br>(mm)                                                        | Outer-Ø<br>(mm) |                                            |                                      |
|                | LI            | kg               |                                                                   |                                                                      |                 |                                            |                                      |
| 60 series      |               |                  |                                                                   |                                                                      |                 |                                            |                                      |
| 155/60 R 15    | 74            | 375              | 4.50B <sup>4)</sup>                                               | 163                                                                  | 575             | 263                                        | 1730                                 |
|                |               |                  | 5.00B <sup>4)</sup>                                               | 168                                                                  |                 |                                            |                                      |
|                |               |                  | 5.50B <sup>4)</sup>                                               | 173                                                                  |                 |                                            |                                      |
| 165/60 R 15    | 77            | 412              | 4½J                                                               | 172                                                                  |                 |                                            |                                      |
| 165/60 R 15 XL | 81            | 462              | 5.00B <sup>4)</sup>                                               | 177                                                                  | 587             | 268                                        | 1765                                 |
|                |               |                  | 5½J                                                               | 182                                                                  |                 |                                            |                                      |
|                |               |                  | 6J                                                                | 187                                                                  |                 |                                            |                                      |
| 175/60 R 15    | 81            | 462              | 5J                                                                | 184                                                                  | 599             | 272                                        | 1805                                 |
|                |               |                  | 5½J                                                               | 189                                                                  |                 |                                            |                                      |
|                |               |                  | 6J                                                                | 194                                                                  |                 |                                            |                                      |
| 185/60 R 15    | 84            | 500              | 5½J                                                               | 197                                                                  | 611             | 277                                        | 1840                                 |
| 185/60 R 15 XL | 88            | 560              | 6J                                                                | 202                                                                  |                 |                                            |                                      |
| 195/60 R 15    | 88            | 560              | 5½J                                                               | 204                                                                  |                 |                                            |                                      |
| 195/60 R 15 XL | 92            | 630              | 6J                                                                | 209                                                                  | 625             | 282                                        | 1875                                 |
|                |               |                  | 6½J                                                               | 214                                                                  |                 |                                            |                                      |
| 205/60 R 15    | 91            | 615              | 6J                                                                | 217                                                                  | 637             | 286                                        | 1910                                 |
| 205/60 R 15 XL | 95            | 690              | 6½J                                                               | 222                                                                  |                 |                                            |                                      |
| 215/60 R 15 XL | 98            | 750              | 6J                                                                | 225                                                                  |                 |                                            |                                      |
|                |               |                  | 6½J                                                               | 230                                                                  | 649             | 291                                        | 1950                                 |
|                |               |                  | 7J                                                                | 235                                                                  |                 |                                            |                                      |
| 225/60 R 15    | 96            | 710              | 6½J                                                               | 237                                                                  | 661             | 296                                        | 1985                                 |
|                |               |                  | 7J                                                                | 242                                                                  |                 |                                            |                                      |
|                |               |                  | 7½J                                                               | 247                                                                  |                 |                                            |                                      |
| 185/60 R 16    | 86            | 530              | 5½J                                                               | 197                                                                  | 636             | 290                                        | 1915                                 |
|                |               |                  | 6J                                                                | 202                                                                  |                 |                                            |                                      |
| 195/60 R 16    | 89            | 580              | 5½J                                                               | 204                                                                  |                 |                                            |                                      |
| 195/60 R 16 XL | 93            | 650              | 6J                                                                | 209                                                                  | 650             | 294                                        | 1950                                 |
|                |               |                  | 6½J                                                               | 214                                                                  |                 |                                            |                                      |
| 205/60 R 16    | 92            | 630              | 6J                                                                | 217                                                                  | 662             | 299                                        | 1990                                 |
| 205/60 R 16 XL | 96            | 710              | 6½J                                                               | 222                                                                  |                 |                                            |                                      |
| 215/60 R 16    | 95            | 690              | 6J                                                                | 225                                                                  |                 |                                            |                                      |
| 215/60 R 16 XL | 99            | 775              | 6½J                                                               | 230                                                                  | 674             | 304                                        | 2025                                 |
|                |               |                  | 7J                                                                | 235                                                                  |                 |                                            |                                      |
| 225/60 R 16    | 98            | 750              | 6½J                                                               | 237                                                                  | 686             | 308                                        | 2060                                 |
| 225/60 R 16 XL | 102           | 850              | 7J                                                                | 242                                                                  |                 |                                            |                                      |
|                |               |                  | 7½J                                                               | 247                                                                  |                 |                                            |                                      |

| Tyre           |               |                  | Permitted<br>rims <sup>1) 7)</sup><br><br>(measuring<br>rim bold) | Tyre dimensions<br>Max. standard<br>value in operation <sup>2)</sup> |                 | Radius <sup>3a)</sup> | Rolling<br>circumference <sup>3)</sup> |
|----------------|---------------|------------------|-------------------------------------------------------------------|----------------------------------------------------------------------|-----------------|-----------------------|----------------------------------------|
| Size           | Load<br>Index | Load<br>capacity |                                                                   | Width<br>(mm)                                                        | Outer-Ø<br>(mm) | stat.<br>(mm)         | (mm)                                   |
|                | LI            | kg               |                                                                   |                                                                      |                 |                       |                                        |
| 60 series      |               |                  |                                                                   |                                                                      |                 |                       |                                        |
| 235/60 R 16    | 100           | 800              | 6½J                                                               | 245                                                                  |                 |                       |                                        |
| 235/60 R 16 XL | 104           | 900              | 7J                                                                | 250                                                                  | 700             | 313                   | 2100                                   |
|                |               |                  | 7½J                                                               | 255                                                                  |                 |                       |                                        |
| 205/60 R 17    | 93            | 650              | 6J                                                                | 217                                                                  | 688             | 312                   | 2070                                   |
| 205/60 R 17 XL | 97            | 730              | 6½J                                                               | 222                                                                  |                 |                       |                                        |
| 215/60 R 17    | 96            | 710              | 6J                                                                | 225                                                                  |                 |                       |                                        |
| 215/60 R 17 XL | 100           | 800              | 6½J                                                               | 230                                                                  | 700             | 317                   | 2105                                   |
|                |               |                  | 7J                                                                | 235                                                                  |                 |                       |                                        |
| 225/60 R 17    | 99            | 775              | 6½J                                                               | 237                                                                  | 712             | 321                   | 2140                                   |
| 225/60 R 17 XL | 103           | 875              | 7J                                                                | 242                                                                  |                 |                       |                                        |
|                |               |                  | 7½J                                                               | 247                                                                  |                 |                       |                                        |
| 235/60 R 17    | 102           | 850              | 6½J                                                               | 245                                                                  |                 |                       |                                        |
| 235/60 R 17 XL | 106           | 950              | 7J                                                                | 250                                                                  | 726             | 326                   | 2180                                   |
|                |               |                  | 7½J                                                               | 255                                                                  |                 |                       |                                        |
| 255/60 R 17    | 106           | 950              | 7J                                                                | 265                                                                  |                 |                       |                                        |
|                |               |                  | 7½J                                                               | 270                                                                  | 750             | 335                   | 2250                                   |
|                |               |                  | 8J                                                                | 275                                                                  |                 |                       |                                        |
|                |               |                  | 8½J                                                               | 280                                                                  |                 |                       |                                        |
|                |               |                  | 9J                                                                | 285                                                                  |                 |                       |                                        |
| 175/60 R 18    | 85            | 515              | 5J                                                                | 184                                                                  | 675             | 310                   | 2035                                   |
|                |               |                  | 5½J                                                               | 189                                                                  |                 |                       |                                        |
|                |               |                  | 6J                                                                | 194                                                                  |                 |                       |                                        |
| 195/60 R 18 XL | 96            | 710              | 5½J                                                               | 204                                                                  |                 |                       |                                        |
|                |               |                  | 6J                                                                | 209                                                                  | 701             | 320                   | 2110                                   |
|                |               |                  | 6½J                                                               | 214                                                                  |                 |                       |                                        |
| 205/60 R 18 XL | 99            | 775              | 6J                                                                | 217                                                                  | 713             | 324                   | 2145                                   |
|                |               |                  | 6½J                                                               | 222                                                                  |                 |                       |                                        |
| 215/60 R 18    | 98            | 750              | 6J                                                                | 225                                                                  |                 |                       |                                        |
| 215/60 R 18 XL | 102           | 850              | 6½J                                                               | 230                                                                  | 725             | 329                   | 2180                                   |
|                |               |                  | 7J                                                                | 235                                                                  |                 |                       |                                        |
| 225/60 R 18    | 100           | 800              | 6½J                                                               | 237                                                                  | 737             | 334                   | 2215                                   |
| 225/60 R 18 XL | 104           | 900              | 7J                                                                | 242                                                                  |                 |                       |                                        |
|                |               |                  | 7½J                                                               | 247                                                                  |                 |                       |                                        |
| 235/60 R 18    | 103           | 875              | 6½J                                                               | 245                                                                  |                 |                       |                                        |
| 235/60 R 18 XL | 107           | 975              | 7J                                                                | 250                                                                  | 751             | 338                   | 2255                                   |
|                |               |                  | 7½J                                                               | 255                                                                  |                 |                       |                                        |

| Size           | Tyre          |                  | Permitted<br>rims <sup>1) 7)</sup> | Tyre dimensions<br>Max. standard<br>value in operation <sup>2)</sup> |                 | Radius <sup>3a)</sup> | Rolling<br>circumference <sup>3)</sup> |
|----------------|---------------|------------------|------------------------------------|----------------------------------------------------------------------|-----------------|-----------------------|----------------------------------------|
|                | Load<br>Index | Load<br>capacity |                                    | Width<br>(mm)                                                        | Outer-Ø<br>(mm) |                       |                                        |
|                | LI            | kg               | (measuring<br>rim bold)            |                                                                      |                 | stat.<br>(mm)         | (mm)                                   |
| 60 series      |               |                  |                                    |                                                                      |                 |                       |                                        |
| 245/60 R 18    | 105           | 925              | 7J                                 | 258                                                                  | 763             | 343                   | 2290                                   |
| 245/60 R 18 XL | 109           | 1030             | 7½J                                | 263                                                                  |                 |                       |                                        |
|                |               |                  | 8J                                 | 268                                                                  |                 |                       |                                        |
|                |               |                  | 8½J                                | 273                                                                  |                 |                       |                                        |
| 255/60 R 18    | 108           | 1000             | 7J                                 | 265                                                                  |                 |                       |                                        |
| 255/60 R 18 XL | 112           | 1120             | 7½J                                | 270                                                                  | 775             | 348                   | 2325                                   |
|                |               |                  | 8J                                 | 275                                                                  |                 |                       |                                        |
|                |               |                  | 8½J                                | 280                                                                  |                 |                       |                                        |
|                |               |                  | 9J                                 | 285                                                                  |                 |                       |                                        |
| 265/60 R 18    | 110           | 1060             | 7½J                                | 278                                                                  |                 |                       |                                        |
| 265/60 R 18 XL | 114           | 1180             | 8J                                 | 283                                                                  | 787             | 353                   | 2365                                   |
|                |               |                  | 8½J                                | 288                                                                  |                 |                       |                                        |
|                |               |                  | 9J                                 | 293                                                                  |                 |                       |                                        |
|                |               |                  | 9½J                                | 298                                                                  |                 |                       |                                        |
| 285/60 R 18    | 116           | 1250             | 8J                                 | 299                                                                  |                 |                       |                                        |
|                |               |                  | 8½J                                | 304                                                                  | 813             | 362                   | 2435                                   |
|                |               |                  | 9J                                 | 309                                                                  |                 |                       |                                        |
|                |               |                  | 9½J                                | 314                                                                  |                 |                       |                                        |
|                |               |                  | 10J                                | 319                                                                  |                 |                       |                                        |
| 175/60 R 19    | 86            | 530              | 5J                                 | 184                                                                  | 701             | 323                   | 2115                                   |
|                |               |                  | 5½J                                | 189                                                                  |                 |                       |                                        |
|                |               |                  | 6J                                 | 194                                                                  |                 |                       |                                        |
| 235/60 R 19 XL | 107           | 975              | 6½J                                | 245                                                                  |                 |                       |                                        |
|                |               |                  | 7J                                 | 250                                                                  | 777             | 351                   | 2335                                   |
|                |               |                  | 7½J                                | 255                                                                  |                 |                       |                                        |
| 255/60 R 19    | 109           | 1030             | 7J                                 | 265                                                                  |                 |                       |                                        |
| 255/60 R 19 XL | 113           | 1150             | 7½J                                | 270                                                                  | 801             | 361                   | 2405                                   |
|                |               |                  | 8J                                 | 275                                                                  |                 |                       |                                        |
|                |               |                  | 8½J                                | 280                                                                  |                 |                       |                                        |
|                |               |                  | 9J                                 | 285                                                                  |                 |                       |                                        |
| 155/60 R 20    | 80            | 450              | 4½J                                | 163                                                                  | 702             | 327                   | 2115                                   |
|                |               |                  | 5J                                 | 168                                                                  |                 |                       |                                        |
|                |               |                  | 5½J                                | 173                                                                  |                 |                       |                                        |
| 235/60 R 20 XL | 108           | 1000             | 6½J                                | 245                                                                  |                 |                       |                                        |
|                |               |                  | 7J                                 | 250                                                                  | 802             | 364                   | 2410                                   |
|                |               |                  | 7½J                                | 255                                                                  |                 |                       |                                        |

| Tyre           |               |                  | Permitted<br>rims <sup>1) 7)</sup><br><br>(measuring<br>rim bold) | Tyre dimensions                                   |                 | Radius <sup>3a)</sup> | Rolling<br>circumference <sup>3)</sup><br><br>(mm) |
|----------------|---------------|------------------|-------------------------------------------------------------------|---------------------------------------------------|-----------------|-----------------------|----------------------------------------------------|
| Size           | Load<br>Index | Load<br>capacity |                                                                   | Max. standard<br>value in operation <sup>2)</sup> |                 | stat.<br>(mm)         |                                                    |
|                | LI            | kg               |                                                                   | Width<br>(mm)                                     | Outer-Ø<br>(mm) |                       |                                                    |
| 60 series      |               |                  |                                                                   |                                                   |                 |                       |                                                    |
| 255/60 R 20 XL | 113           | 1150             | 7J                                                                | 265                                               |                 |                       |                                                    |
|                |               |                  | 7½J                                                               | 270                                               | 826             | 373                   | 2485                                               |
|                |               |                  | 8J                                                                | 275                                               |                 |                       |                                                    |
|                |               |                  | 8½J                                                               | 280                                               |                 |                       |                                                    |
|                |               |                  | 9J                                                                | 285                                               |                 |                       |                                                    |
| 275/60 R 20    | 115           | 1215             | 7½J                                                               | 285                                               |                 |                       |                                                    |
| 275/60 R 20 XL | 116           | 1250             | 8J                                                                | 290                                               | 852             | 383                   | 2555                                               |
|                |               |                  | 8½J                                                               | 295                                               |                 |                       |                                                    |
|                |               |                  | 9J                                                                | 300                                               |                 |                       |                                                    |
|                |               |                  | 9½J                                                               | 305                                               |                 |                       |                                                    |
| 55 series      |               |                  |                                                                   |                                                   |                 |                       |                                                    |
| 185/55 R 14    | 80            | 450              | 5½J                                                               | 197                                               |                 |                       |                                                    |
|                |               |                  | 6J                                                                | 202                                               | 568             | 258                   | 1710                                               |
| 175/55 R 15    | 77            | 412              | 5J                                                                | 184                                               |                 |                       |                                                    |
|                |               |                  | 5½J                                                               | 189                                               | 581             | 265                   | 1750                                               |
|                |               |                  | 6J                                                                | 194                                               |                 |                       |                                                    |
| 185/55 R 15    | 82            | 475              | 5½J                                                               | 197                                               |                 |                       |                                                    |
| 185/55 R 15 XL | 86            | 530              | 6J                                                                | 202                                               | 593             | 270                   | 1785                                               |
| 195/55 R 15    | 85            | 515              | 5½J                                                               | 204                                               |                 |                       |                                                    |
| 195/55 R 15 XL | 89            | 580              | 6J                                                                | 209                                               | 603             | 274                   | 1815                                               |
|                |               |                  | 6½J                                                               | 214                                               |                 |                       |                                                    |
|                |               |                  | 7J                                                                | 219                                               |                 |                       |                                                    |
| 205/55 R 15    | 88            | 560              | 6J                                                                | 218                                               |                 |                       |                                                    |
|                |               |                  | 6½J                                                               | 223                                               | 617             | 279                   | 1850                                               |
| 185/55 R 16    | 83            | 487              | 5½J                                                               | 197                                               |                 |                       |                                                    |
| 185/55 R 16 XL | 87            | 545              | 6J                                                                | 202                                               | 618             | 283                   | 1860                                               |
| 195/55 R 16    | 87            | 545              | 5½J                                                               | 204                                               |                 |                       |                                                    |
| 195/55 R 16 XL | 91            | 615              | 6J                                                                | 209                                               | 628             | 286                   | 1890                                               |
|                |               |                  | 6½J                                                               | 214                                               |                 |                       |                                                    |
|                |               |                  | 7J                                                                | 219                                               |                 |                       |                                                    |
| 205/55 R 16    | 91            | 615              | 6J                                                                | 218                                               |                 |                       |                                                    |
| 205/55 R 16 XL | 94            | 670              | 6½J                                                               | 223                                               | 642             | 291                   | 1930                                               |
| 215/55 R 16    | 93            | 650              | 6½J                                                               | 230                                               |                 |                       |                                                    |
| 215/55 R 16 XL | 97            | 730              | 7J                                                                | 235                                               | 652             | 295                   | 1960                                               |

| Tyre           |               |                  | Permitted<br>rims <sup>1) 7)</sup><br><br>(measuring<br>rim bold) | Tyre dimensions                                   |                 | Radius <sup>3a)</sup><br><br>stat.<br>(mm) | Rolling<br>circumference <sup>3)</sup><br><br>(mm) |
|----------------|---------------|------------------|-------------------------------------------------------------------|---------------------------------------------------|-----------------|--------------------------------------------|----------------------------------------------------|
| Size           | Load<br>Index | Load<br>capacity |                                                                   | Max. standard<br>value in operation <sup>2)</sup> |                 |                                            |                                                    |
|                | LI            | kg               |                                                                   | Width<br>(mm)                                     | Outer-Ø<br>(mm) |                                            |                                                    |
| 55 series      |               |                  |                                                                   |                                                   |                 |                                            |                                                    |
| 225/55 R 16    | 95            | 690              | 6½J                                                               | 237                                               |                 |                                            |                                                    |
| 225/55 R 16 XL | 99            | 775              | 7J                                                                | 242                                               | 664             | 300                                        | 1995                                               |
|                |               |                  | 7½J                                                               | 247                                               |                 |                                            |                                                    |
| 195/55 R 17    | 88            | 560              | 5½J                                                               | 204                                               |                 |                                            |                                                    |
|                |               |                  | 6J                                                                | 209                                               | 654             | 299                                        | 1970                                               |
|                |               |                  | 6½J                                                               | 214                                               |                 |                                            |                                                    |
|                |               |                  | 7J                                                                | 219                                               |                 |                                            |                                                    |
| 205/55 R 17    | 91            | 615              | 6J                                                                | 218                                               |                 |                                            |                                                    |
| 205/55 R 17 XL | 95            | 690              | 6½J                                                               | 223                                               | 668             | 304                                        | 2005                                               |
| 215/55 R 17    | 94            | 670              | 6½J                                                               | 230                                               |                 |                                            |                                                    |
| 215/55 R 17 XL | 98            | 750              | 7J                                                                | 235                                               | 678             | 308                                        | 2035                                               |
| 225/55 R 17    | 97            | 730              | 6½J                                                               | 237                                               |                 |                                            |                                                    |
| 225/55 R 17 XL | 101           | 825              | 7J                                                                | 242                                               | 690             | 313                                        | 2075                                               |
|                |               |                  | 7½J                                                               | 247                                               |                 |                                            |                                                    |
| 235/55 R 17    | 99            | 775              | 7J                                                                | 250                                               |                 |                                            |                                                    |
| 235/55 R 17 XL | 103           | 875              | 7½J                                                               | 255                                               | 700             | 317                                        | 2105                                               |
| 245/55 R 17    | 102           | 850              | 7J                                                                | 258                                               |                 |                                            |                                                    |
| 245/55 R 17 XL | 106           | 950              | 7½J                                                               | 263                                               | 712             | 321                                        | 2140                                               |
|                |               |                  | 8J                                                                | 268                                               |                 |                                            |                                                    |
|                |               |                  | 8½J                                                               | 273                                               |                 |                                            |                                                    |
| 255/55 R 17    | 104           | 900              | 7½J                                                               | 271                                               |                 |                                            |                                                    |
|                |               |                  | 8J                                                                | 276                                               | 724             | 325                                        | 2170                                               |
|                |               |                  | 8½J                                                               | 281                                               |                 |                                            |                                                    |
| 275/55 R 17    | 109           | 1030             | 7½J                                                               | 285                                               |                 |                                            |                                                    |
|                |               |                  | 8J                                                                | 290                                               |                 |                                            |                                                    |
|                |               |                  | 8½J                                                               | 295                                               | 746             | 334                                        | 2240                                               |
|                |               |                  | 9J                                                                | 300                                               |                 |                                            |                                                    |
|                |               |                  | 9½J                                                               | 305                                               |                 |                                            |                                                    |
| 195/55 R 18 XL | 93            | 650              | 5½J                                                               | 204                                               |                 |                                            |                                                    |
|                |               |                  | 6J                                                                | 209                                               | 679             | 312                                        | 2045                                               |
|                |               |                  | 6½J                                                               | 214                                               |                 |                                            |                                                    |
|                |               |                  | 7J                                                                | 219                                               |                 |                                            |                                                    |
| 205/55 R 18 XL | 96            | 710              | 6J                                                                | 218                                               |                 |                                            |                                                    |
|                |               |                  | 6½J                                                               | 223                                               | 693             | 317                                        | 2085                                               |
| 215/55 R 18    | 95            | 690              | 6½J                                                               | 230                                               |                 |                                            |                                                    |
| 215/55 R 18 XL | 99            | 775              | 7J                                                                | 235                                               | 703             | 321                                        | 2115                                               |

| Tyre           |               |                  | Permitted<br>rims <sup>1) 7)</sup><br><br>(measuring<br>rim bold) | Tyre dimensions                                   |                 | Radius <sup>3a)</sup> | Rolling<br>circumference <sup>3)</sup> |
|----------------|---------------|------------------|-------------------------------------------------------------------|---------------------------------------------------|-----------------|-----------------------|----------------------------------------|
| Size           | Load<br>Index | Load<br>capacity |                                                                   | Max. standard<br>value in operation <sup>2)</sup> |                 | stat.<br>(mm)         |                                        |
|                | LI            | kg               |                                                                   | Width<br>(mm)                                     | Outer-Ø<br>(mm) |                       |                                        |
| 55 series      |               |                  |                                                                   |                                                   |                 |                       |                                        |
| 225/55 R 18    | 98            | 750              | 6½J                                                               | 237                                               |                 |                       |                                        |
| 225/55 R 18 XL | 102           | 850              | 7J                                                                | 242                                               | 715             | 325                   | 2150                                   |
|                |               |                  | 7½J                                                               | 247                                               |                 |                       |                                        |
| 235/55 R 18    | 100           | 800              | 7J                                                                | 250                                               |                 |                       |                                        |
| 235/55 R 18 XL | 104           | 900              | 7½J                                                               | 255                                               | 725             | 329                   | 2180                                   |
| 255/55 R 18    | 105           | 925              | 7½J                                                               | 271                                               |                 |                       |                                        |
| 255/55 R 18 XL | 109           | 1030             | 8J                                                                | 276                                               | 749             | 338                   | 2250                                   |
|                |               |                  | 8½J                                                               | 281                                               |                 |                       |                                        |
| 205/55 R 19 XL | 97            | 730              | 6J                                                                | 218                                               |                 |                       |                                        |
|                |               |                  | 6½J                                                               | 223                                               | 719             | 330                   | 2160                                   |
| 225/55 R 19    | 99            | 775              | 6½J                                                               | 237                                               |                 |                       |                                        |
| 225/55 R 19 XL | 103           | 875              | 7J                                                                | 242                                               | 741             | 338                   | 2230                                   |
|                |               |                  | 7½J                                                               | 247                                               |                 |                       |                                        |
| 235/55 R 19    | 101           | 825              | 7J                                                                | 250                                               |                 |                       |                                        |
| 235/55 R 19 XL | 105           | 925              | 7½J                                                               | 255                                               | 751             | 342                   | 2260                                   |
| 245/55 R 19    | 103           | 875              | 7J                                                                | 258                                               |                 |                       |                                        |
|                |               |                  | 7½J                                                               | 263                                               | 763             | 347                   | 2295                                   |
|                |               |                  | 8J                                                                | 268                                               |                 |                       |                                        |
|                |               |                  | 8½J                                                               | 273                                               |                 |                       |                                        |
| 255/55 R 19 XL | 111           | 1090             | 7½J                                                               | 271                                               |                 |                       |                                        |
|                |               |                  | 8J                                                                | 276                                               | 775             | 351                   | 2325                                   |
|                |               |                  | 8½J                                                               | 281                                               |                 |                       |                                        |
| 265/55 R 19    | 109           | 1030             | 7½J                                                               | 278                                               |                 |                       |                                        |
| 265/55 R 19 XL | 113           | 1150             | 8J                                                                | 283                                               |                 |                       |                                        |
|                |               |                  | 8½J                                                               | 288                                               | 787             | 355                   | 2365                                   |
|                |               |                  | 9J                                                                | 293                                               |                 |                       |                                        |
|                |               |                  | 9½J                                                               | 298                                               |                 |                       |                                        |
| 275/55 R 19    | 111           | 1090             | 7½J                                                               | 285                                               |                 |                       |                                        |
|                |               |                  | 8J                                                                | 290                                               |                 |                       |                                        |
|                |               |                  | 8½J                                                               | 295                                               | 797             | 359                   | 2395                                   |
|                |               |                  | 9J                                                                | 300                                               |                 |                       |                                        |
| 175/55 R 20    | 85            | 515              | 5J                                                                | 184                                               |                 |                       |                                        |
|                |               |                  | 5½J                                                               | 189                                               | 708             | 329                   | 2135                                   |
|                |               |                  | 6J                                                                | 194                                               |                 |                       |                                        |

| Size           | Tyre          |                  | Permitted<br>rims <sup>1) 7)</sup><br><br>(measuring<br>rim bold) | Tyre dimensions<br>Max. standard<br>value in operation <sup>2)</sup> |                 | Radius <sup>3a)</sup> | Rolling<br>circumference <sup>3)</sup> |
|----------------|---------------|------------------|-------------------------------------------------------------------|----------------------------------------------------------------------|-----------------|-----------------------|----------------------------------------|
|                | Load<br>Index | Load<br>capacity |                                                                   | Width<br>(mm)                                                        | Outer-Ø<br>(mm) | stat.<br>(mm)         | (mm)                                   |
|                | LI            | kg               |                                                                   |                                                                      |                 |                       |                                        |
| 55 series      |               |                  |                                                                   |                                                                      |                 |                       |                                        |
| 195/55 R 20 XL | 95            | 690              | 5.50B <sup>4)</sup>                                               | 204                                                                  |                 |                       |                                        |
|                |               |                  | <b>6.00B<sup>4)</sup></b>                                         | <b>209</b>                                                           | <b>730</b>      | <b>337</b>            | <b>2200</b>                            |
|                |               |                  | 6.50B <sup>4)</sup>                                               | 214                                                                  |                 |                       |                                        |
|                |               |                  | 7J                                                                | 219                                                                  |                 |                       |                                        |
| 235/55 R 20    | 102           | 850              | 7J                                                                | 250                                                                  |                 |                       |                                        |
| 235/55 R 20 XL | 105           | 925              | <b>7½J</b>                                                        | <b>255</b>                                                           | <b>776</b>      | <b>355</b>            | <b>2335</b>                            |
| 255/55 R 20    | 107           | 975              | 7½J                                                               | 271                                                                  |                 |                       |                                        |
| 255/55 R 20 XL | 110           | 1060             | <b>8J</b>                                                         | <b>276</b>                                                           | <b>800</b>      | <b>363</b>            | <b>2405</b>                            |
|                |               |                  | 8½J                                                               | 281                                                                  |                 |                       |                                        |
| 265/55 R 20 XL | 113           | 1150             | 7½J                                                               | 278                                                                  |                 |                       |                                        |
|                |               |                  | 8J                                                                | 283                                                                  |                 |                       |                                        |
|                |               |                  | <b>8½J</b>                                                        | <b>288</b>                                                           | <b>812</b>      | <b>368</b>            | <b>2440</b>                            |
|                |               |                  | 9J                                                                | 293                                                                  |                 |                       |                                        |
|                |               |                  | 9½J                                                               | 298                                                                  |                 |                       |                                        |
| 275/55 R 20    | 113           | 1150             | 7½J                                                               | 285                                                                  |                 |                       |                                        |
| 275/55 R 20 XL | 117           | 1285             | 8J                                                                | 290                                                                  |                 |                       |                                        |
|                |               |                  | <b>8½J</b>                                                        | <b>295</b>                                                           | <b>822</b>      | <b>372</b>            | <b>2470</b>                            |
|                |               |                  | 9J                                                                | 300                                                                  |                 |                       |                                        |
|                |               |                  | 9½J                                                               | 305                                                                  |                 |                       |                                        |
| 50 series      |               |                  |                                                                   |                                                                      |                 |                       |                                        |
| 175/50 R 15    | 75            | 387              | 5J                                                                | 184                                                                  |                 |                       |                                        |
|                |               |                  | <b>5½J</b>                                                        | <b>189</b>                                                           | <b>565</b>      | <b>259</b>            | <b>1700</b>                            |
|                |               |                  | 6J                                                                | 194                                                                  |                 |                       |                                        |
| 195/50 R 15    | 82            | 475              | 5½J                                                               | 204                                                                  |                 |                       |                                        |
| 195/50 R 15 XL | 86            | 530              | <b>6J</b>                                                         | <b>209</b>                                                           | <b>585</b>      | <b>267</b>            | <b>1760</b>                            |
|                |               |                  | 6½J                                                               | 214                                                                  |                 |                       |                                        |
|                |               |                  | 7J                                                                | 219                                                                  |                 |                       |                                        |
| 205/50 R 15    | 86            | 530              | 5½J                                                               | 213                                                                  |                 |                       |                                        |
|                |               |                  | 6J                                                                | 218                                                                  |                 |                       |                                        |
|                |               |                  | <b>6½J</b>                                                        | <b>223</b>                                                           | <b>595</b>      | <b>271</b>            | <b>1790</b>                            |
|                |               |                  | 7J                                                                | 228                                                                  |                 |                       |                                        |
|                |               |                  | 7½J                                                               | 233                                                                  |                 |                       |                                        |
| 185/50 R 16    | 81            | 462              | 5J                                                                | 192                                                                  |                 |                       |                                        |
|                |               |                  | 5½J                                                               | 197                                                                  |                 |                       |                                        |
|                |               |                  | <b>6J</b>                                                         | <b>202</b>                                                           | <b>600</b>      | <b>276</b>            | <b>1805</b>                            |
|                |               |                  | 6½J                                                               | 207                                                                  |                 |                       |                                        |

| Tyre           |               |                  | Permitted<br>rims <sup>1) 7)</sup><br><br>(measuring<br>rim bold) | Tyre dimensions<br>Max. standard<br>value in operation <sup>2)</sup> |                 | Radius <sup>3a)</sup> | Rolling<br>circumference <sup>3)</sup> |
|----------------|---------------|------------------|-------------------------------------------------------------------|----------------------------------------------------------------------|-----------------|-----------------------|----------------------------------------|
| Size           | Load<br>Index | Load<br>capacity |                                                                   | Width<br>(mm)                                                        | Outer-Ø<br>(mm) | stat.<br>(mm)         | (mm)                                   |
|                | LI            | kg               |                                                                   |                                                                      |                 |                       |                                        |
| 50 series      |               |                  |                                                                   |                                                                      |                 |                       |                                        |
| 195/50 R 16    | 84            | 500              | 5½J                                                               | 204                                                                  |                 |                       |                                        |
| 195/50 R 16 XL | 88            | 560              | 6J                                                                | 209                                                                  | 610             | 279                   | 1835                                   |
|                |               |                  | 6½J                                                               | 214                                                                  |                 |                       |                                        |
|                |               |                  | 7J                                                                | 219                                                                  |                 |                       |                                        |
| 205/50 R 16    | 87            | 545              | 5½J                                                               | 213                                                                  |                 |                       |                                        |
|                |               |                  | 6J                                                                | 218                                                                  |                 |                       |                                        |
|                |               |                  | 6½J                                                               | 223                                                                  | 620             | 283                   | 1865                                   |
|                |               |                  | 7J                                                                | 228                                                                  |                 |                       |                                        |
| 225/50 R 16    | 92            | 630              | 7½J                                                               | 233                                                                  |                 |                       |                                        |
|                |               |                  | 6½J                                                               | 237                                                                  |                 |                       |                                        |
|                |               |                  | 7J                                                                | 242                                                                  | 642             | 291                   | 1930                                   |
| 185/50 R 17 XL | 86            | 530              | 7½J                                                               | 247                                                                  |                 |                       |                                        |
|                |               |                  | 5J                                                                | 192                                                                  |                 |                       |                                        |
|                |               |                  | 5½J                                                               | 197                                                                  |                 |                       |                                        |
|                |               |                  | 6J                                                                | 202                                                                  | 626             | 289                   | 1885                                   |
| 205/50 R 17    | 89            | 580              | 6½J                                                               | 207                                                                  |                 |                       |                                        |
|                |               |                  | 5½J                                                               | 213                                                                  |                 |                       |                                        |
|                |               |                  | 6J                                                                | 218                                                                  |                 |                       |                                        |
| 205/50 R 17 XL | 93            | 650              | 6½J                                                               | 223                                                                  | 646             | 296                   | 1945                                   |
|                |               |                  | 7J                                                                | 228                                                                  |                 |                       |                                        |
|                |               |                  | 7½J                                                               | 233                                                                  |                 |                       |                                        |
|                |               |                  |                                                                   |                                                                      |                 |                       |                                        |
| 215/50 R 17    | 91            | 615              | 6½J                                                               | 230                                                                  |                 |                       |                                        |
| 215/50 R 17 XL | 95            | 690              | 7J                                                                | 235                                                                  | 656             | 300                   | 1975                                   |
| 225/50 R 17    | 94            | 670              | 6½J                                                               | 237                                                                  |                 |                       |                                        |
| 225/50 R 17 XL | 98            | 750              | 7J                                                                | 242                                                                  | 668             | 304                   | 2005                                   |
|                |               |                  | 7½J                                                               | 247                                                                  |                 |                       |                                        |
| 235/50 R 17    | 96            | 710              | 7J                                                                | 250                                                                  |                 |                       |                                        |
| 235/50 R 17 XL | 100           | 800              | 7½J                                                               | 255                                                                  | 678             | 308                   | 2035                                   |
| 245/50 R 17    | 99            | 775              | 7J                                                                | 258                                                                  |                 |                       |                                        |
|                |               |                  | 7½J                                                               | 263                                                                  | 688             | 312                   | 2070                                   |
|                |               |                  | 8J                                                                | 268                                                                  |                 |                       |                                        |
|                |               |                  | 8½J                                                               | 273                                                                  |                 |                       |                                        |
| 215/50 R 18    | 92            | 630              | 6½J                                                               | 230                                                                  |                 |                       |                                        |
| 215/50 R 18 XL | 96            | 710              | 7J                                                                | 235                                                                  | 681             | 313                   | 2055                                   |

| Size           | Tyre          |                  | Permitted<br>rims <sup>1) 7)</sup><br><br>(measuring<br>rim bold) | Tyre dimensions<br>Max. standard<br>value in operation <sup>2)</sup> |                 | Radius <sup>3a)</sup><br><br>stat.<br>(mm) | Rolling<br>circumference<br><br>(mm) |
|----------------|---------------|------------------|-------------------------------------------------------------------|----------------------------------------------------------------------|-----------------|--------------------------------------------|--------------------------------------|
|                | Load<br>Index | Load<br>capacity |                                                                   | Width<br>(mm)                                                        | Outer-Ø<br>(mm) |                                            |                                      |
|                | LI            | kg               |                                                                   |                                                                      |                 |                                            |                                      |
| 50 series      |               |                  |                                                                   |                                                                      |                 |                                            |                                      |
| 225/50 R 18    | 95            | 690              | 6½J                                                               | 237                                                                  |                 |                                            |                                      |
| 225/50 R 18 XL | 99            | 775              | 7J                                                                | 242                                                                  | 693             | 317                                        | 2085                                 |
|                |               |                  | 7½J                                                               | 247                                                                  |                 |                                            |                                      |
| 235/50 R 18    | 97            | 730              | 7J                                                                | 250                                                                  |                 |                                            |                                      |
| 235/50 R 18 XL | 101           | 825              | 7½J                                                               | 255                                                                  | 703             | 321                                        | 2115                                 |
| 245/50 R 18    | 100           | 800              | 7J                                                                | 258                                                                  |                 |                                            |                                      |
| 245/50 R 18 XL | 104           | 900              | 7½J                                                               | 263                                                                  | 713             | 324                                        | 2145                                 |
|                |               |                  | 8J                                                                | 268                                                                  |                 |                                            |                                      |
|                |               |                  | 8½J                                                               | 273                                                                  |                 |                                            |                                      |
| 255/50 R 18 XL | 106           | 950              | 7½J                                                               | 271                                                                  |                 |                                            |                                      |
|                |               |                  | 8J                                                                | 276                                                                  | 723             | 328                                        | 2175                                 |
|                |               |                  | 8½J                                                               | 281                                                                  |                 |                                            |                                      |
| 285/50 R 18    | 109           | 1030             | 8J                                                                | 299                                                                  |                 |                                            |                                      |
|                |               |                  | 8½J                                                               | 304                                                                  |                 |                                            |                                      |
|                |               |                  | 9J                                                                | 309                                                                  | 755             | 340                                        | 2265                                 |
|                |               |                  | 9½J                                                               | 314                                                                  |                 |                                            |                                      |
| 195/50 R 19    | 88            | 560              | 10J                                                               | 319                                                                  |                 |                                            |                                      |
|                |               |                  | 5½J                                                               | 204                                                                  |                 |                                            |                                      |
|                |               |                  | 6J                                                                | 209                                                                  | 687             | 318                                        | 2070                                 |
|                |               |                  | 6½J                                                               | 214                                                                  |                 |                                            |                                      |
| 205/50 R 19 XL | 94            | 670              | 7J                                                                | 219                                                                  |                 |                                            |                                      |
|                |               |                  | 5½J                                                               | 213                                                                  |                 |                                            |                                      |
|                |               |                  | 6J                                                                | 218                                                                  |                 |                                            |                                      |
|                |               |                  | 6½J                                                               | 223                                                                  | 697             | 322                                        | 2100                                 |
| 215/50 R 19    | 93            | 650              | 7J                                                                | 228                                                                  |                 |                                            |                                      |
|                |               |                  | 7½J                                                               | 233                                                                  |                 |                                            |                                      |
|                |               |                  | 6½J                                                               | 230                                                                  |                 |                                            |                                      |
|                |               |                  | 7J                                                                | 235                                                                  | 707             | 326                                        | 2130                                 |
| 225/50 R 19 XL | 100           | 800              | 6½J                                                               | 237                                                                  |                 |                                            |                                      |
|                |               |                  | 7J                                                                | 242                                                                  | 719             | 330                                        | 2160                                 |
|                |               |                  | 7½J                                                               | 247                                                                  |                 |                                            |                                      |
| 235/50 R 19    | 99            | 775              | 7J                                                                | 250                                                                  |                 |                                            |                                      |
| 235/50 R 19 XL | 103           | 875              | 7½J                                                               | 255                                                                  | 729             | 334                                        | 2195                                 |

| Tyre           |               |                  | Permitted<br>rims <sup>1) 7)</sup><br><br>(measuring<br>rim bold) | Tyre dimensions                                   |                 | Radius <sup>3a)</sup><br><br>stat.<br>(mm) | Rolling<br>circumference <sup>3)</sup><br><br>(mm) |
|----------------|---------------|------------------|-------------------------------------------------------------------|---------------------------------------------------|-----------------|--------------------------------------------|----------------------------------------------------|
| Size           | Load<br>Index | Load<br>capacity |                                                                   | Max. standard<br>value in operation <sup>2)</sup> |                 |                                            |                                                    |
|                | LI            | kg               |                                                                   | Width<br>(mm)                                     | Outer-Ø<br>(mm) |                                            |                                                    |
| 50 series      |               |                  |                                                                   |                                                   |                 |                                            |                                                    |
| 245/50 R 19    | 101           | 825              | 7J                                                                | 258                                               |                 |                                            |                                                    |
| 245/50 R 19 XL | 105           | 925              | 7½J                                                               | 263                                               | 739             | 337                                        | 2225                                               |
|                |               |                  | 8J                                                                | 268                                               |                 |                                            |                                                    |
|                |               |                  | 8½J                                                               | 273                                               |                 |                                            |                                                    |
| 255/50 R 19    | 103           | 875              | 7½J                                                               | 271                                               |                 |                                            |                                                    |
| 255/50 R 19 XL | 107           | 975              | 8J                                                                | 276                                               | 749             | 341                                        | 2255                                               |
|                |               |                  | 8½J                                                               | 281                                               |                 |                                            |                                                    |
| 265/50 R 19 XL | 110           | 1060             | 7½J                                                               | 278                                               |                 |                                            |                                                    |
|                |               |                  | 8J                                                                | 283                                               |                 |                                            |                                                    |
|                |               |                  | 8½J                                                               | 288                                               | 759             | 345                                        | 2285                                               |
|                |               |                  | 9J                                                                | 293                                               |                 |                                            |                                                    |
|                |               |                  | 9½J                                                               | 298                                               |                 |                                            |                                                    |
| 275/50 R 19 XL | 112           | 1120             | 7½J                                                               | 285                                               |                 |                                            |                                                    |
|                |               |                  | 8J                                                                | 290                                               |                 |                                            |                                                    |
|                |               |                  | 8½J                                                               | 295                                               | 771             | 349                                        | 2315                                               |
|                |               |                  | 9J                                                                | 300                                               |                 |                                            |                                                    |
|                |               |                  | 9½J                                                               | 305                                               |                 |                                            |                                                    |
| 235/50 R 20    | 100           | 800              | 7J                                                                | 250                                               |                 |                                            |                                                    |
| 235/50 R 20 XL | 104           | 900              | 7½J                                                               | 255                                               | 754             | 346                                        | 2270                                               |
| 245/50 R 20    | 102           | 850              | 7J                                                                | 258                                               |                 |                                            |                                                    |
| 245/50 R 20 XL | 105           | 925              | 7½J                                                               | 263                                               | 764             | 350                                        | 2300                                               |
|                |               |                  | 8J                                                                | 268                                               |                 |                                            |                                                    |
|                |               |                  | 8½J                                                               | 273                                               |                 |                                            |                                                    |
| 255/50 R 20    | 105           | 925              | 7½J                                                               | 271                                               |                 |                                            |                                                    |
| 255/50 R 20 XL | 109           | 1030             | 8J                                                                | 276                                               | 774             | 354                                        | 2330                                               |
|                |               |                  | 8½J                                                               | 281                                               |                 |                                            |                                                    |
| 265/50 R 20 XL | 111           | 1090             | 7½J                                                               | 278                                               |                 |                                            |                                                    |
|                |               |                  | 8J                                                                | 283                                               |                 |                                            |                                                    |
|                |               |                  | 8½J                                                               | 288                                               | 784             | 358                                        | 2360                                               |
|                |               |                  | 9J                                                                | 293                                               |                 |                                            |                                                    |
|                |               |                  | 9½J                                                               | 298                                               |                 |                                            |                                                    |
| 275/50 R 20    | 109           | 1030             | 7½J                                                               | 285                                               |                 |                                            |                                                    |
| 275/50 R 20 XL | 113           | 1150             | 8J                                                                | 290                                               |                 |                                            |                                                    |
|                |               |                  | 8½J                                                               | 295                                               | 796             | 362                                        | 2390                                               |
|                |               |                  | 9J                                                                | 300                                               |                 |                                            |                                                    |
|                |               |                  | 9½J                                                               | 305                                               |                 |                                            |                                                    |

| Tyre              |               |                  | Permitted<br>rims <sup>1) 7)</sup><br><br>(measuring<br>rim bold) | Tyre dimensions                                   |                 | Radius <sup>3a)</sup> | Rolling<br>circumference <sup>3)</sup> |
|-------------------|---------------|------------------|-------------------------------------------------------------------|---------------------------------------------------|-----------------|-----------------------|----------------------------------------|
| Size              | Load<br>Index | Load<br>capacity |                                                                   | Max. standard<br>value in operation <sup>2)</sup> |                 | stat.<br>(mm)         |                                        |
|                   | LI            | kg               |                                                                   | Width<br>(mm)                                     | Outer-Ø<br>(mm) |                       |                                        |
| 50 series         |               |                  |                                                                   |                                                   |                 |                       |                                        |
| 285/50 R 20 XL    | 116           | 1250             | 8J                                                                | 299                                               |                 |                       |                                        |
|                   |               |                  | 8½J                                                               | 304                                               |                 |                       |                                        |
|                   |               |                  | 9J                                                                | 309                                               | 806             | 366                   | 2420                                   |
|                   |               |                  | 9½J                                                               | 314                                               |                 |                       |                                        |
|                   |               |                  | 10J                                                               | 319                                               |                 |                       |                                        |
| 255/50 R 21 XL    | 109           | 1030             | 7½J                                                               | 271                                               |                 |                       |                                        |
|                   |               |                  | 8J                                                                | 276                                               | 799             | 366                   | 2405                                   |
|                   |               |                  | 8½J                                                               | 281                                               |                 |                       |                                        |
| HL 255/50 R 21 XL | 113           | 1150             | 7½J                                                               | 271                                               |                 |                       |                                        |
|                   |               |                  | 8J                                                                | 276                                               | 799             | 366                   | 2405                                   |
|                   |               |                  | 8½J                                                               | 281                                               |                 |                       |                                        |
| 275/50 R 21 XL    | 113           | 1150             | 7½J                                                               | 285                                               |                 |                       |                                        |
|                   |               |                  | 8J                                                                | 290                                               |                 |                       |                                        |
|                   |               |                  | 8½J                                                               | 295                                               | 821             | 374                   | 2465                                   |
|                   |               |                  | 9J                                                                | 300                                               |                 |                       |                                        |
|                   |               |                  | 9½J                                                               | 305                                               |                 |                       |                                        |
| 275/50 R 22 XL    | 115           | 1215             | 7½J                                                               | 285                                               |                 |                       |                                        |
|                   |               |                  | 8J                                                                | 290                                               |                 |                       |                                        |
|                   |               |                  | 8½J                                                               | 295                                               | 847             | 387                   | 2545                                   |
|                   |               |                  | 9J                                                                | 300                                               |                 |                       |                                        |
|                   |               |                  | 9½J                                                               | 305                                               |                 |                       |                                        |
| 45 series         |               |                  |                                                                   |                                                   |                 |                       |                                        |
| 195/45 R 14       | 77            | 412              | 6J                                                                | 198                                               |                 |                       |                                        |
|                   |               |                  | 6½J                                                               | 203                                               | 540             | 247                   | 1625                                   |
|                   |               |                  | 7J                                                                | 208                                               |                 |                       |                                        |
|                   |               |                  | 7½J                                                               | 213                                               |                 |                       |                                        |
| 195/45 R 15       | 78            | 425              | 6J                                                                | 198                                               |                 |                       |                                        |
|                   |               |                  | 6½J                                                               | 203                                               | 565             | 259                   | 1700                                   |
|                   |               |                  | 7J                                                                | 208                                               |                 |                       |                                        |
|                   |               |                  | 7½J                                                               | 213                                               |                 |                       |                                        |
| 195/45 R 16       | 80            | 450              | 6J                                                                | 198                                               |                 |                       |                                        |
| 195/45 R 16 XL    | 84            | 500              | 6½J                                                               | 203                                               | 590             | 272                   | 1775                                   |
|                   |               |                  | 7J                                                                | 208                                               |                 |                       |                                        |
|                   |               |                  | 7½J                                                               | 213                                               |                 |                       |                                        |

| Tyre           |               |                  | Permitted<br>rims <sup>1) 7)</sup><br><br>(measuring<br>rim bold) | Tyre dimensions                                   |                 | Radius <sup>3a)</sup> | Rolling<br>circumference <sup>3)</sup> |
|----------------|---------------|------------------|-------------------------------------------------------------------|---------------------------------------------------|-----------------|-----------------------|----------------------------------------|
| Size           | Load<br>Index | Load<br>capacity |                                                                   | Max. standard<br>value in operation <sup>2)</sup> |                 | stat.<br>(mm)         |                                        |
|                | LI            | kg               |                                                                   | Width<br>(mm)                                     | Outer-Ø<br>(mm) |                       |                                        |
| 45 series      |               |                  |                                                                   |                                                   |                 |                       |                                        |
| 205/45 R 16    | 83            | 487              | 6½J                                                               | 209                                               |                 |                       |                                        |
| 205/45 R 16 XL | 87            | 545              | 7J                                                                | 214                                               | 598             | 275                   | 1800                                   |
|                |               |                  | 7½J                                                               | 219                                               |                 |                       |                                        |
| 215/45 R 16    | 86            | 530              | 7J                                                                | 222                                               | 608             | 279                   | 1830                                   |
| 215/45 R 16 XL | 90            | 600              | 7½J                                                               | 227                                               |                 |                       |                                        |
|                |               |                  | 8J                                                                | 232                                               |                 |                       |                                        |
| 195/45 R 17    | 81            | 462              | 6J                                                                | 198                                               |                 |                       |                                        |
|                |               |                  | 6½J                                                               | 203                                               | 616             | 285                   | 1855                                   |
|                |               |                  | 7J                                                                | 208                                               |                 |                       |                                        |
|                |               |                  | 7½J                                                               | 213                                               |                 |                       |                                        |
| 205/45 R 17    | 84            | 500              | 6½J                                                               | 209                                               |                 |                       |                                        |
| 205/45 R 17 XL | 88            | 560              | 7J                                                                | 214                                               | 624             | 288                   | 1880                                   |
|                |               |                  | 7½J                                                               | 219                                               |                 |                       |                                        |
| 215/45 R 17    | 87            | 545              | 7J                                                                | 222                                               | 634             | 292                   | 1910                                   |
| 215/45 R 17 XL | 91            | 615              | 7½J                                                               | 227                                               |                 |                       |                                        |
|                |               |                  | 8J                                                                | 232                                               |                 |                       |                                        |
| 225/45 R 17    | 91            | 615              | 7J                                                                | 229                                               |                 |                       |                                        |
| 225/45 R 17 XL | 94            | 670              | 7½J                                                               | 234                                               | 642             | 295                   | 1935                                   |
|                |               |                  | 8J                                                                | 239                                               |                 |                       |                                        |
|                |               |                  | 8½J                                                               | 244                                               |                 |                       |                                        |
| 235/45 R 17    | 94            | 670              | 7½J                                                               | 240                                               |                 |                       |                                        |
| 235/45 R 17 XL | 97            | 730              | 8J                                                                | 245                                               | 652             | 299                   | 1965                                   |
|                |               |                  | 8½J                                                               | 250                                               |                 |                       |                                        |
|                |               |                  | 9J                                                                | 255                                               |                 |                       |                                        |
| 245/45 R 17    | 95            | 690              | 7½J                                                               | 248                                               |                 |                       |                                        |
| 245/45 R 17 XL | 99            | 775              | 8J                                                                | 253                                               | 660             | 302                   | 1990                                   |
|                |               |                  | 8½J                                                               | 258                                               |                 |                       |                                        |
|                |               |                  | 9J                                                                | 263                                               |                 |                       |                                        |
| 255/45 R 17    | 98            | 750              | 8J                                                                | 260                                               |                 |                       |                                        |
| 255/45 R 17 XL | 102           | 850              | 8½J                                                               | 265                                               | 672             | 306                   | 2020                                   |
|                |               |                  | 9J                                                                | 270                                               |                 |                       |                                        |
|                |               |                  | 9½J                                                               | 275                                               |                 |                       |                                        |
| 205/45 R 18 XL | 90            | 600              | 6½J                                                               | 209                                               |                 |                       |                                        |
|                |               |                  | 7J                                                                | 214                                               | 649             | 300                   | 1955                                   |
|                |               |                  | 7½J                                                               | 219                                               |                 |                       |                                        |

| Tyre           |               |                  | Permitted<br>rims <sup>1) 7)</sup><br><br>(measuring<br>rim bold) | Tyre dimensions                                   |                 | Radius <sup>3a)</sup> | Rolling<br>circumference <sup>3)</sup> |
|----------------|---------------|------------------|-------------------------------------------------------------------|---------------------------------------------------|-----------------|-----------------------|----------------------------------------|
| Size           | Load<br>Index | Load<br>capacity |                                                                   | Max. standard<br>value in operation <sup>2)</sup> |                 | stat.<br>(mm)         | (mm)                                   |
|                | LI            | kg               |                                                                   | Width<br>(mm)                                     | Outer-Ø<br>(mm) |                       |                                        |
| 45 series      |               |                  |                                                                   |                                                   |                 |                       |                                        |
| 215/45 R 18    | 89            | 580              | 7J                                                                | 222                                               | 659             | 304                   | 1985                                   |
| 215/45 R 18 XL | 93            | 650              | 7½J<br>8J                                                         | 227<br>232                                        |                 |                       |                                        |
| 225/45 R 18    | 91            | 615              | 7J                                                                | 229                                               |                 |                       |                                        |
| 225/45 R 18 XL | 95            | 690              | 7½J<br>8J<br>8½J                                                  | 234<br>239<br>244                                 | 667             | 307                   | 2010                                   |
| 235/45 R 18    | 94            | 670              | 7½J                                                               | 240                                               |                 |                       |                                        |
| 235/45 R 18 XL | 98            | 750              | 8J<br>8½J<br>9J                                                   | 245<br>250<br>255                                 | 677             | 311                   | 2040                                   |
| 245/45 R 18    | 96            | 710              | 7½J                                                               | 248                                               |                 |                       |                                        |
| 245/45 R 18 XL | 100           | 800              | 8J<br>8½J<br>9J                                                   | 253<br>258<br>263                                 | 685             | 314                   | 2065                                   |
| 255/45 R 18    | 99            | 775              | 8J                                                                | 260                                               |                 |                       |                                        |
| 255/45 R 18 XL | 103           | 875              | 8½J<br>9J<br>9½J                                                  | 265<br>270<br>275                                 | 697             | 318                   | 2095                                   |
| 265/45 R 18    | 101           | 825              | 8½J<br>9J<br>9½J<br>10J                                           | 272<br>277<br>282<br>287                          |                 | 321                   | 2120                                   |
| 275/45 R 18    | 103           | 875              | 8½J<br>9J<br>9½J<br>10J<br>10½J                                   | 279<br>284<br>289<br>294<br>299                   |                 | 325                   | 2150                                   |
| 225/45 R 19    | 92            | 630              | 7J                                                                | 229                                               |                 |                       |                                        |
| 225/45 R 19 XL | 96            | 710              | 7½J<br>8J<br>8½J                                                  | 234<br>239<br>244                                 | 693             | 320                   | 2090                                   |
| 235/45 R 19    | 95            | 690              | 7½J                                                               | 240                                               |                 |                       |                                        |
| 235/45 R 19 XL | 99            | 775              | 8J<br>8½J<br>9J                                                   | 245<br>250<br>255                                 | 703             | 324                   | 2120                                   |

| Tyre           |               |                  | Permitted<br>rims <sup>1) 7)</sup><br><br>(measuring<br>rim bold) | Tyre dimensions                                   |                 | Radius <sup>3a)</sup><br><br>stat.<br>(mm) | Rolling<br>circumference <sup>3)</sup><br><br>(mm) |
|----------------|---------------|------------------|-------------------------------------------------------------------|---------------------------------------------------|-----------------|--------------------------------------------|----------------------------------------------------|
| Size           | Load<br>Index | Load<br>capacity |                                                                   | Max. standard<br>value in operation <sup>2)</sup> |                 |                                            |                                                    |
|                | LI            | kg               |                                                                   | Width<br>(mm)                                     | Outer-Ø<br>(mm) |                                            |                                                    |
| 45 series      |               |                  |                                                                   |                                                   |                 |                                            |                                                    |
| 245/45 R 19    | 98            | 750              | 7½J                                                               | 248                                               |                 |                                            |                                                    |
| 245/45 R 19 XL | 102           | 850              | 8J                                                                | 253                                               | 711             | 327                                        | 2145                                               |
|                |               |                  | 8½J                                                               | 258                                               |                 |                                            |                                                    |
|                |               |                  | 9J                                                                | 263                                               |                 |                                            |                                                    |
| 255/45 R 19    | 100           | 800              | 8J                                                                | 260                                               |                 |                                            |                                                    |
| 255/45 R 19 XL | 104           | 900              | 8½J                                                               | 265                                               | 723             | 331                                        | 2175                                               |
|                |               |                  | 9J                                                                | 270                                               |                 |                                            |                                                    |
|                |               |                  | 9½J                                                               | 275                                               |                 |                                            |                                                    |
| 265/45 R 19 XL | 105           | 925              | 8½J                                                               | 272                                               |                 |                                            |                                                    |
|                |               |                  | 9J                                                                | 277                                               | 731             | 334                                        | 2200                                               |
|                |               |                  | 9½J                                                               | 282                                               |                 |                                            |                                                    |
|                |               |                  | 10J                                                               | 287                                               |                 |                                            |                                                    |
| 275/45 R 19 XL | 108           | 1000             | 8½J                                                               | 279                                               |                 |                                            |                                                    |
|                |               |                  | 9J                                                                | 284                                               | 741             | 338                                        | 2230                                               |
|                |               |                  | 9½J                                                               | 289                                               |                 |                                            |                                                    |
|                |               |                  | 10J                                                               | 294                                               |                 |                                            |                                                    |
|                |               |                  | 10½J                                                              | 299                                               |                 |                                            |                                                    |
| 285/45 R 19    | 107           | 975              | 9J                                                                | 291                                               |                 |                                            |                                                    |
| 285/45 R 19 XL | 111           | 1090             | 9½J                                                               | 296                                               | 749             | 341                                        | 2255                                               |
|                |               |                  | 10J                                                               | 301                                               |                 |                                            |                                                    |
|                |               |                  | 10½J                                                              | 306                                               |                 |                                            |                                                    |
| 215/45 R 20 XL | 95            | 690              | 7J                                                                | 222                                               | 710             | 330                                        | 2140                                               |
|                |               |                  | 7½J                                                               | 227                                               |                 |                                            |                                                    |
|                |               |                  | 8J                                                                | 232                                               |                 |                                            |                                                    |
| 235/45 R 20 XL | 100           | 800              | 7½J                                                               | 240                                               |                 |                                            |                                                    |
|                |               |                  | 8J                                                                | 245                                               | 728             | 337                                        | 2195                                               |
|                |               |                  | 8½J                                                               | 250                                               |                 |                                            |                                                    |
|                |               |                  | 9J                                                                | 255                                               |                 |                                            |                                                    |
| 245/45 R 20    | 99            | 775              | 7½J                                                               | 248                                               |                 |                                            |                                                    |
| 245/45 R 20 XL | 103           | 875              | 8J                                                                | 253                                               | 736             | 340                                        | 2220                                               |
|                |               |                  | 8½J                                                               | 258                                               |                 |                                            |                                                    |
|                |               |                  | 9J                                                                | 263                                               |                 |                                            |                                                    |
| 255/45 R 20    | 101           | 825              | 8J                                                                | 260                                               |                 |                                            |                                                    |
| 255/45 R 20 XL | 105           | 925              | 8½J                                                               | 265                                               | 748             | 344                                        | 2250                                               |
|                |               |                  | 9J                                                                | 270                                               |                 |                                            |                                                    |
|                |               |                  | 9½J                                                               | 275                                               |                 |                                            |                                                    |

| Tyre              |               |                  | Permitted<br>rims <sup>1) 7)</sup><br><br>(measuring<br>rim bold) | Tyre dimensions                                   |                 | Radius <sup>3a)</sup> | Rolling<br>circumference <sup>3)</sup><br><br>(mm) |  |
|-------------------|---------------|------------------|-------------------------------------------------------------------|---------------------------------------------------|-----------------|-----------------------|----------------------------------------------------|--|
| Size              | Load<br>Index | Load<br>capacity |                                                                   | Max. standard<br>value in operation <sup>2)</sup> |                 | stat.<br>(mm)         |                                                    |  |
|                   | LI            | kg               |                                                                   | Width<br>(mm)                                     | Outer-Ø<br>(mm) |                       |                                                    |  |
| 45 series         |               |                  |                                                                   |                                                   |                 |                       |                                                    |  |
| 265/45 R 20       | 104           | 900              | 8½J                                                               | 272                                               |                 |                       |                                                    |  |
| 265/45 R 20 XL    | 108           | 1000             | 9J                                                                | 277                                               | 756             | 347                   | 2275                                               |  |
|                   |               |                  | 9½J                                                               | 282                                               |                 |                       |                                                    |  |
|                   |               |                  | 10J                                                               | 287                                               |                 |                       |                                                    |  |
| 275/45 R 20 XL    | 110           | 1060             | 8½J                                                               | 279                                               |                 |                       |                                                    |  |
|                   |               |                  | 9J                                                                | 284                                               | 766             | 351                   | 2305                                               |  |
|                   |               |                  | 9½J                                                               | 289                                               |                 |                       |                                                    |  |
|                   |               |                  | 10J                                                               | 294                                               |                 |                       |                                                    |  |
|                   |               |                  | 10½J                                                              | 299                                               |                 |                       |                                                    |  |
|                   |               |                  |                                                                   |                                                   |                 |                       |                                                    |  |
|                   |               |                  |                                                                   |                                                   |                 |                       |                                                    |  |
|                   |               |                  |                                                                   |                                                   |                 |                       |                                                    |  |
| 285/45 R 20 XL    | 112           | 1120             | 9J                                                                | 291                                               |                 |                       |                                                    |  |
|                   |               |                  | 9½J                                                               | 296                                               | 774             | 354                   | 2330                                               |  |
|                   |               |                  | 10J                                                               | 301                                               |                 |                       |                                                    |  |
|                   |               |                  | 10½J                                                              | 306                                               |                 |                       |                                                    |  |
| 295/45 R 20 XL    | 114           | 1180             | 9½J                                                               | 303                                               |                 |                       |                                                    |  |
|                   |               |                  | 10J                                                               | 308                                               | 784             | 358                   | 2360                                               |  |
|                   |               |                  | 10½J                                                              | 313                                               |                 |                       |                                                    |  |
|                   |               |                  | 11J                                                               | 318                                               |                 |                       |                                                    |  |
| 235/45 R 21 XL    | 101           | 825              | 7½J                                                               | 240                                               |                 |                       |                                                    |  |
|                   |               |                  | 8J                                                                | 245                                               | 753             | 349                   | 2270                                               |  |
|                   |               |                  | 8½J                                                               | 250                                               |                 |                       |                                                    |  |
|                   |               |                  | 9J                                                                | 255                                               |                 |                       |                                                    |  |
| HL 235/45 R 21 XL | 104           | 900              | 7½J                                                               | 240                                               |                 |                       |                                                    |  |
|                   |               |                  | 8J                                                                | 245                                               | 753             | 349                   | 2270                                               |  |
|                   |               |                  | 8½J                                                               | 250                                               |                 |                       |                                                    |  |
| 245/45 R 21 XL    | 104           | 900              | 7½J                                                               | 248                                               |                 |                       |                                                    |  |
|                   |               |                  | 8J                                                                | 253                                               | 761             | 352                   | 2295                                               |  |
|                   |               |                  | 8½J                                                               | 258                                               |                 |                       |                                                    |  |
|                   |               |                  | 9J                                                                | 263                                               |                 |                       |                                                    |  |
| 255/45 R 21 XL    | 106           | 950              | 8J                                                                | 260                                               |                 |                       |                                                    |  |
|                   |               |                  | 8½J                                                               | 265                                               | 773             | 356                   | 2325                                               |  |
|                   |               |                  | 9J                                                                | 270                                               |                 |                       |                                                    |  |
|                   |               |                  | 9½J                                                               | 275                                               |                 |                       |                                                    |  |
| 265/45 R 21       | 104           | 900              | 8½J                                                               | 272                                               |                 |                       |                                                    |  |
| 265/45 R 21 XL    | 108           | 1000             | 9J                                                                | 277                                               | 781             | 359                   | 2350                                               |  |
|                   |               |                  | 9½J                                                               | 282                                               |                 |                       |                                                    |  |
|                   |               |                  | 10J                                                               | 287                                               |                 |                       |                                                    |  |

| Tyre              |               |                  | Permitted<br>rims <sup>(1) 7)</sup><br><br>(measuring<br>rim bold) | Tyre dimensions<br>Max. standard<br>value in operation <sup>2)</sup> |                 | Radius <sup>3a)</sup> | Rolling<br>circumference <sup>3)</sup> |
|-------------------|---------------|------------------|--------------------------------------------------------------------|----------------------------------------------------------------------|-----------------|-----------------------|----------------------------------------|
| Size              | Load<br>Index | Load<br>capacity |                                                                    | Width<br>(mm)                                                        | Outer-Ø<br>(mm) | stat.<br>(mm)         | (mm)                                   |
|                   | LI            | kg               |                                                                    |                                                                      |                 |                       |                                        |
| 45 series         |               |                  |                                                                    |                                                                      |                 |                       |                                        |
| HL 265/45 R 21 XL | 112           | 1120             | 8½J                                                                | 272                                                                  |                 |                       |                                        |
|                   |               |                  | 9J                                                                 | 277                                                                  | 781             | 359                   | 2350                                   |
|                   |               |                  | 9½J                                                                | 282                                                                  |                 |                       |                                        |
| 275/45 R 21       | 107           | 975              | 8½J                                                                | 279                                                                  |                 |                       |                                        |
| 275/45 R 21 XL    | 110           | 1060             | 9J                                                                 | 284                                                                  | 791             | 363                   | 2380                                   |
|                   |               |                  | 9½J                                                                | 289                                                                  |                 |                       |                                        |
|                   |               |                  | 10J                                                                | 294                                                                  |                 |                       |                                        |
|                   |               |                  | 10½J                                                               | 299                                                                  |                 |                       |                                        |
| HL 275/45 R 21 XL | 114           | 1180             | 8½J                                                                | 279                                                                  |                 |                       |                                        |
|                   |               |                  | 9J                                                                 | 284                                                                  | 791             | 363                   | 2380                                   |
|                   |               |                  | 9½J                                                                | 289                                                                  |                 |                       |                                        |
| 285/45 R 21       | 109           | 1030             | 9J                                                                 | 291                                                                  |                 |                       |                                        |
| 285/45 R 21 XL    | 113           | 1150             | 9½J                                                                | 296                                                                  | 799             | 366                   | 2405                                   |
|                   |               |                  | 10J                                                                | 301                                                                  |                 |                       |                                        |
|                   |               |                  | 10½J                                                               | 306                                                                  |                 |                       |                                        |
| 315/45 R 21       | 116           | 1250             | 10J                                                                | 323                                                                  |                 |                       |                                        |
|                   |               |                  | 10½J                                                               | 328                                                                  | 829             | 377                   | 2490                                   |
|                   |               |                  | 11J                                                                | 333                                                                  |                 |                       |                                        |
|                   |               |                  | 11½J                                                               | 338                                                                  |                 |                       |                                        |
|                   |               |                  | 12J                                                                | 343                                                                  |                 |                       |                                        |
| 255/45 R 22 XL    | 107           | 975              | 8J                                                                 | 260                                                                  |                 |                       |                                        |
|                   |               |                  | 8½J                                                                | 265                                                                  | 799             | 369                   | 2405                                   |
|                   |               |                  | 9J                                                                 | 270                                                                  |                 |                       |                                        |
|                   |               |                  | 9½J                                                                | 275                                                                  |                 |                       |                                        |
| HL 255/45 R 22 XL | 111           | 1090             | 8J                                                                 | 260                                                                  |                 |                       |                                        |
|                   |               |                  | 8½J                                                                | 265                                                                  | 799             | 369                   | 2405                                   |
|                   |               |                  | 9J                                                                 | 270                                                                  |                 |                       |                                        |
| 275/45 R 22       | 108           | 1000             | 8½J                                                                | 279                                                                  |                 |                       |                                        |
| 275/45 R 22 XL    | 112           | 1120             | 9J                                                                 | 284                                                                  | 817             | 376                   | 2460                                   |
|                   |               |                  | 9½J                                                                | 289                                                                  |                 |                       |                                        |
|                   |               |                  | 10J                                                                | 294                                                                  |                 |                       |                                        |
|                   |               |                  | 10½J                                                               | 299                                                                  |                 |                       |                                        |
|                   |               |                  |                                                                    |                                                                      |                 |                       |                                        |
| HL 275/45 R 22 XL | 115           | 1215             | 8½J                                                                | 279                                                                  |                 |                       |                                        |
|                   |               |                  | 9J                                                                 | 284                                                                  | 817             | 376                   | 2460                                   |
|                   |               |                  | 9½J                                                                | 289                                                                  |                 |                       |                                        |

| Size              | Tyre          |                  | Permitted<br>rims <sup>1) 7)</sup><br><br>(measuring<br>rim bold) | Tyre dimensions<br>Max. standard<br>value in operation <sup>2)</sup> |                 | Radius <sup>3a)</sup><br><br>stat.<br>(mm) | Rolling<br>circumference <sup>3)</sup><br><br>(mm) |
|-------------------|---------------|------------------|-------------------------------------------------------------------|----------------------------------------------------------------------|-----------------|--------------------------------------------|----------------------------------------------------|
|                   | Load<br>Index | Load<br>capacity |                                                                   | Width<br>(mm)                                                        | Outer-Ø<br>(mm) |                                            |                                                    |
|                   | LI            | kg               |                                                                   |                                                                      |                 |                                            |                                                    |
| 45 series         |               |                  |                                                                   |                                                                      |                 |                                            |                                                    |
| 285/45 R 22 XL    | 114           | 1180             | 9J                                                                | 291                                                                  |                 |                                            |                                                    |
|                   |               |                  | 9½J                                                               | 296                                                                  | 825             | 379                                        | 2485                                               |
|                   |               |                  | 10J                                                               | 301                                                                  |                 |                                            |                                                    |
|                   |               |                  | 10½J                                                              | 306                                                                  |                 |                                            |                                                    |
| HL 285/45 R 22 XL | 116           | 1250             | 9J                                                                | 291                                                                  |                 |                                            |                                                    |
|                   |               |                  | 9½J                                                               | 296                                                                  | 825             | 379                                        | 2485                                               |
|                   |               |                  | 10J                                                               | 301                                                                  |                 |                                            |                                                    |
|                   |               |                  |                                                                   |                                                                      |                 |                                            |                                                    |
| 40 series         |               |                  |                                                                   |                                                                      |                 |                                            |                                                    |
| 215/40 R 16 XL    | 86            | 530              | 7J                                                                | 222                                                                  |                 |                                            |                                                    |
|                   |               |                  | 7½J                                                               | 227                                                                  | 584             | 270                                        | 1765                                               |
|                   |               |                  | 8J                                                                | 232                                                                  |                 |                                            |                                                    |
|                   |               |                  | 8½J                                                               | 237                                                                  |                 |                                            |                                                    |
| 195/40 R 17 XL    | 81            | 462              | 6½J                                                               | 203                                                                  |                 |                                            |                                                    |
|                   |               |                  | 7J                                                                | 208                                                                  | 594             | 277                                        | 1795                                               |
|                   |               |                  | 7½J                                                               | 213                                                                  |                 |                                            |                                                    |
| 205/40 R 17 XL    | 84            | 500              | 7J                                                                | 215                                                                  |                 |                                            |                                                    |
|                   |               |                  | 7½J                                                               | 220                                                                  | 602             | 280                                        | 1820                                               |
|                   |               |                  | 8J                                                                | 225                                                                  |                 |                                            |                                                    |
| 215/40 R 17 XL    | 87            | 545              | 7J                                                                | 222                                                                  |                 |                                            |                                                    |
|                   |               |                  | 7½J                                                               | 227                                                                  | 610             | 283                                        | 1840                                               |
|                   |               |                  | 8J                                                                | 232                                                                  |                 |                                            |                                                    |
|                   |               |                  | 8½J                                                               | 237                                                                  |                 |                                            |                                                    |
| 235/40 R 17       | 90            | 600              | 8J                                                                | 246                                                                  |                 |                                            |                                                    |
| 235/40 R 17 XL    | 94            | 670              | 8½J                                                               | 251                                                                  | 628             | 289                                        | 1890                                               |
|                   |               |                  | 9J                                                                | 256                                                                  |                 |                                            |                                                    |
|                   |               |                  | 9½J                                                               | 261                                                                  |                 |                                            |                                                    |
| 245/40 R 17       | 91            | 615              | 8J                                                                | 253                                                                  |                 |                                            |                                                    |
| 245/40 R 17 XL    | 95            | 690              | 8½J                                                               | 258                                                                  | 636             | 292                                        | 1915                                               |
|                   |               |                  | 9J                                                                | 263                                                                  |                 |                                            |                                                    |
|                   |               |                  | 9½J                                                               | 268                                                                  |                 |                                            |                                                    |
| 255/40 R 17       | 94            | 670              | 8½J                                                               | 265                                                                  |                 |                                            |                                                    |
| 255/40 R 17 XL    | 98            | 750              | 9J                                                                | 270                                                                  | 644             | 296                                        | 1940                                               |
|                   |               |                  | 9½J                                                               | 275                                                                  |                 |                                            |                                                    |
|                   |               |                  | 10J                                                               | 280                                                                  |                 |                                            |                                                    |

| Tyre           |               |                  | Permitted<br>rims <sup>1) 7)</sup><br><br>(measuring<br>rim bold) | Tyre dimensions                                   |                 | Radius <sup>3a)</sup> | Rolling<br>circumference <sup>3)</sup> |
|----------------|---------------|------------------|-------------------------------------------------------------------|---------------------------------------------------|-----------------|-----------------------|----------------------------------------|
| Size           | Load<br>Index | Load<br>capacity |                                                                   | Max. standard<br>value in operation <sup>2)</sup> |                 | stat.<br>(mm)         |                                        |
|                | LI            | kg               |                                                                   | Width<br>(mm)                                     | Outer-Ø<br>(mm) |                       |                                        |
| 40 series      |               |                  |                                                                   |                                                   |                 |                       |                                        |
| 205/40 R 18 XL | 86            | 530              | 7J                                                                | 215                                               |                 |                       |                                        |
|                |               |                  | 7½J                                                               | 220                                               | 627             | 292                   | 1895                                   |
|                |               |                  | 8J                                                                | 225                                               |                 |                       |                                        |
| 215/40 R 18    | 85            | 515              | 7J                                                                | 222                                               |                 |                       |                                        |
| 215/40 R 18 XL | 89            | 580              | 7½J                                                               | 227                                               | 635             | 296                   | 1920                                   |
|                |               |                  | 8J                                                                | 232                                               |                 |                       |                                        |
|                |               |                  | 8½J                                                               | 237                                               |                 |                       |                                        |
| 225/40 R 18    | 88            | 560              | 7½J                                                               | 234                                               |                 |                       |                                        |
| 225/40 R 18 XL | 92            | 630              | 8J                                                                | 239                                               | 645             | 299                   | 1945                                   |
|                |               |                  | 8½J                                                               | 244                                               |                 |                       |                                        |
|                |               |                  | 9J                                                                | 249                                               |                 |                       |                                        |
| 235/40 R 18    | 91            | 615              | 8J                                                                | 246                                               |                 |                       |                                        |
| 235/40 R 18 XL | 95            | 690              | 8½J                                                               | 251                                               | 653             | 302                   | 1965                                   |
|                |               |                  | 9J                                                                | 256                                               |                 |                       |                                        |
|                |               |                  | 9½J                                                               | 261                                               |                 |                       |                                        |
| 245/40 R 18    | 93            | 650              | 8J                                                                | 253                                               |                 |                       |                                        |
| 245/40 R 18 XL | 97            | 730              | 8½J                                                               | 258                                               | 661             | 305                   | 1990                                   |
|                |               |                  | 9J                                                                | 263                                               |                 |                       |                                        |
|                |               |                  | 9½J                                                               | 268                                               |                 |                       |                                        |
| 255/40 R 18    | 95            | 690              | 8½J                                                               | 265                                               |                 |                       |                                        |
| 255/40 R 18 XL | 99            | 775              | 9J                                                                | 270                                               | 669             | 308                   | 2015                                   |
|                |               |                  | 9½J                                                               | 275                                               |                 |                       |                                        |
|                |               |                  | 10J                                                               | 280                                               |                 |                       |                                        |
| 265/40 R 18 XL | 101           | 825              | 9J                                                                | 277                                               |                 |                       |                                        |
|                |               |                  | 9½J                                                               | 282                                               | 677             | 311                   | 2040                                   |
|                |               |                  | 10J                                                               | 287                                               |                 |                       |                                        |
|                |               |                  | 10½J                                                              | 292                                               |                 |                       |                                        |
| 275/40 R 18    | 99            | 775              | 9J                                                                | 284                                               |                 |                       |                                        |
| 275/40 R 18 XL | 103           | 875              | 9½J                                                               | 289                                               | 685             | 314                   | 2065                                   |
|                |               |                  | 10J                                                               | 294                                               |                 |                       |                                        |
|                |               |                  | 10½J                                                              | 299                                               |                 |                       |                                        |
|                |               |                  | 11J                                                               | 304                                               |                 |                       |                                        |
| 225/40 R 19    | 89            | 580              | 7½J                                                               | 234                                               |                 |                       |                                        |
| 225/40 R 19 XL | 93            | 650              | 8J                                                                | 239                                               | 671             | 312                   | 2020                                   |
|                |               |                  | 8½J                                                               | 244                                               |                 |                       |                                        |
|                |               |                  | 9J                                                                | 249                                               |                 |                       |                                        |

| Tyre              |               |                  | Permitted<br>rims <sup>1) 7)</sup><br><br>(measuring<br>rim bold) | Tyre dimensions                                   |                 | Radius <sup>3a)</sup> | Rolling<br>circumference <sup>3)</sup> |
|-------------------|---------------|------------------|-------------------------------------------------------------------|---------------------------------------------------|-----------------|-----------------------|----------------------------------------|
| Size              | Load<br>Index | Load<br>capacity |                                                                   | Max. standard<br>value in operation <sup>2)</sup> |                 | stat.<br>(mm)         |                                        |
|                   | LI            | kg               |                                                                   | Width<br>(mm)                                     | Outer-Ø<br>(mm) |                       |                                        |
| 40 series         |               |                  |                                                                   |                                                   |                 |                       |                                        |
| 235/40 R 19       | 92            | 630              | 8J                                                                | 246                                               |                 |                       |                                        |
| 235/40 R 19 XL    | 96            | 710              | 8½J                                                               | 251                                               | 679             | 315                   | 2045                                   |
|                   |               |                  | 9J                                                                | 256                                               |                 |                       |                                        |
|                   |               |                  | 9½J                                                               | 261                                               |                 |                       |                                        |
| 245/40 R 19 XL    | 98            | 750              | 8J                                                                | 253                                               |                 |                       |                                        |
|                   |               |                  | 8½J                                                               | 258                                               | 687             | 318                   | 2070                                   |
|                   |               |                  | 9J                                                                | 263                                               |                 |                       |                                        |
|                   |               |                  | 9½J                                                               | 268                                               |                 |                       |                                        |
| HL 245/40 R 19 XL | 101           | 825              | 8J                                                                | 253                                               |                 |                       |                                        |
|                   |               |                  | 8½J                                                               | 258                                               | 687             | 318                   | 2070                                   |
|                   |               |                  | 9J                                                                | 263                                               |                 |                       |                                        |
| 255/40 R 19       | 96            | 710              | 8½J                                                               | 265                                               |                 |                       |                                        |
| 255/40 R 19 XL    | 100           | 800              | 9J                                                                | 270                                               | 695             | 321                   | 2095                                   |
|                   |               |                  | 9½J                                                               | 275                                               |                 |                       |                                        |
|                   |               |                  | 10J                                                               | 280                                               |                 |                       |                                        |
| 265/40 R 19       | 98            | 750              | 9J                                                                | 277                                               |                 |                       |                                        |
| 265/40 R 19 XL    | 102           | 850              | 9½J                                                               | 282                                               | 703             | 324                   | 2120                                   |
|                   |               |                  | 10J                                                               | 287                                               |                 |                       |                                        |
|                   |               |                  | 10½J                                                              | 292                                               |                 |                       |                                        |
| 275/40 R 19       | 101           | 825              | 9J                                                                | 284                                               |                 |                       |                                        |
| 275/40 R 19 XL    | 105           | 925              | 9½J                                                               | 289                                               | 711             | 327                   | 2145                                   |
|                   |               |                  | 10J                                                               | 294                                               |                 |                       |                                        |
|                   |               |                  | 10½J                                                              | 299                                               |                 |                       |                                        |
|                   |               |                  | 11J                                                               | 304                                               |                 |                       |                                        |
| 285/40 R 19       | 103           | 875              | 9½J                                                               | 297                                               |                 |                       |                                        |
| 285/40 R 19 XL    | 107           | 975              | 10J                                                               | 302                                               | 721             | 330                   | 2170                                   |
|                   |               |                  | 10½J                                                              | 307                                               |                 |                       |                                        |
|                   |               |                  | 11J                                                               | 312                                               |                 |                       |                                        |
| 295/40 R 19 XL    | 108           | 1000             | 10J                                                               | 308                                               |                 |                       |                                        |
|                   |               |                  | 10½J                                                              | 313                                               | 729             | 334                   | 2195                                   |
|                   |               |                  | 11J                                                               | 318                                               |                 |                       |                                        |
|                   |               |                  | 11½J                                                              | 323                                               |                 |                       |                                        |
| 225/40 R 20 XL    | 94            | 670              | 7½J                                                               | 234                                               |                 |                       |                                        |
|                   |               |                  | 8J                                                                | 239                                               | 696             | 324                   | 2100                                   |
|                   |               |                  | 8½J                                                               | 244                                               |                 |                       |                                        |
|                   |               |                  | 9J                                                                | 249                                               |                 |                       |                                        |

| Tyre              |               |                  | Permitted<br>rims <sup>1) 7)</sup><br><br>(measuring<br>rim bold) | Tyre dimensions                                   |                 | Radius <sup>3a)</sup> | Rolling<br>circumference <sup>3)</sup> |
|-------------------|---------------|------------------|-------------------------------------------------------------------|---------------------------------------------------|-----------------|-----------------------|----------------------------------------|
| Size              | Load<br>Index | Load<br>capacity |                                                                   | Max. standard<br>value in operation <sup>2)</sup> |                 | stat.<br>(mm)         |                                        |
|                   | LI            | kg               |                                                                   | Width<br>(mm)                                     | Outer-Ø<br>(mm) |                       |                                        |
| 40 series         |               |                  |                                                                   |                                                   |                 |                       |                                        |
| 235/40 R 20 XL    | 96            | 710              | 8J                                                                | 246                                               |                 |                       |                                        |
|                   |               |                  | 8½J                                                               | 251                                               | 704             | 327                   | 2125                                   |
|                   |               |                  | 9J                                                                | 256                                               |                 |                       |                                        |
|                   |               |                  | 9½J                                                               | 261                                               |                 |                       |                                        |
| 245/40 R 20       | 95            | 690              | 8J                                                                | 253                                               |                 |                       |                                        |
| 245/40 R 20 XL    | 99            | 775              | 8½J                                                               | 258                                               | 712             | 330                   | 2145                                   |
|                   |               |                  | 9J                                                                | 263                                               |                 |                       |                                        |
|                   |               |                  | 9½J                                                               | 268                                               |                 |                       |                                        |
| 255/40 R 20       | 97            | 730              | 8½J                                                               | 265                                               |                 |                       |                                        |
| 255/40 R 20 XL    | 101           | 825              | 9J                                                                | 270                                               | 720             | 334                   | 2170                                   |
|                   |               |                  | 9½J                                                               | 275                                               |                 |                       |                                        |
|                   |               |                  | 10J                                                               | 280                                               |                 |                       |                                        |
| HL 255/40 R 20 XL | 104           | 900              | 8½J                                                               | 265                                               |                 |                       |                                        |
|                   |               |                  | 9J                                                                | 270                                               | 720             | 334                   | 2170                                   |
|                   |               |                  | 9½J                                                               | 275                                               |                 |                       |                                        |
| 265/40 R 20 XL    | 104           | 900              | 9J                                                                | 277                                               |                 |                       |                                        |
|                   |               |                  | 9½J                                                               | 282                                               | 728             | 337                   | 2195                                   |
|                   |               |                  | 10J                                                               | 287                                               |                 |                       |                                        |
|                   |               |                  | 10½J                                                              | 292                                               |                 |                       |                                        |
| 275/40 R 20 XL    | 106           | 950              | 9J                                                                | 284                                               |                 |                       |                                        |
|                   |               |                  | 9½J                                                               | 289                                               | 736             | 340                   | 2220                                   |
|                   |               |                  | 10J                                                               | 294                                               |                 |                       |                                        |
|                   |               |                  | 10½J                                                              | 299                                               |                 |                       |                                        |
|                   |               |                  | 11J                                                               | 304                                               |                 |                       |                                        |
| 285/40 R 20       | 104           | 900              | 9½J                                                               | 297                                               |                 |                       |                                        |
| 285/40 R 20 XL    | 108           | 1000             | 10J                                                               | 302                                               | 746             | 343                   | 2245                                   |
|                   |               |                  | 10½J                                                              | 307                                               |                 |                       |                                        |
|                   |               |                  | 11J                                                               | 312                                               |                 |                       |                                        |
| 295/40 R 20       | 106           | 950              | 10J                                                               | 308                                               |                 |                       |                                        |
| 295/40 R 20 XL    | 110           | 1060             | 10½J                                                              | 313                                               | 754             | 346                   | 2270                                   |
|                   |               |                  | 11J                                                               | 318                                               |                 |                       |                                        |
|                   |               |                  | 11½J                                                              | 323                                               |                 |                       |                                        |

| Tyre              |               |                  | Permitted<br>rims <sup>1) 7)</sup><br><br>(measuring<br>rim bold) | Tyre dimensions                                   |                 | Radius <sup>3a)</sup> | Rolling<br>circumference <sup>3)</sup> |
|-------------------|---------------|------------------|-------------------------------------------------------------------|---------------------------------------------------|-----------------|-----------------------|----------------------------------------|
| Size              | Load<br>Index | Load<br>capacity |                                                                   | Max. standard<br>value in operation <sup>2)</sup> |                 | stat.<br>(mm)         |                                        |
|                   | LI            | kg               |                                                                   | Width<br>(mm)                                     | Outer-Ø<br>(mm) |                       |                                        |
| 40 series         |               |                  |                                                                   |                                                   |                 |                       |                                        |
| 305/40 R 20 XL    | 112           | 1120             | 10J                                                               | 316                                               |                 |                       |                                        |
|                   |               |                  | 10½J                                                              | 321                                               |                 |                       |                                        |
|                   |               |                  | 11J                                                               | 326                                               | 762             | 349                   | 2295                                   |
|                   |               |                  | 11½J                                                              | 331                                               |                 |                       |                                        |
|                   |               |                  | 12J                                                               | 336                                               |                 |                       |                                        |
| 235/40 R 21 XL    | 98            | 750              | 8J                                                                | 246                                               |                 |                       |                                        |
|                   |               |                  | 8½J                                                               | 251                                               | 729             | 340                   | 2200                                   |
|                   |               |                  | 9J                                                                | 256                                               |                 |                       |                                        |
|                   |               |                  | 9½J                                                               | 261                                               |                 |                       |                                        |
| 245/40 R 21 XL    | 100           | 800              | 8J                                                                | 253                                               |                 |                       |                                        |
|                   |               |                  | 8½J                                                               | 258                                               | 737             | 343                   | 2225                                   |
|                   |               |                  | 9J                                                                | 263                                               |                 |                       |                                        |
|                   |               |                  | 9½J                                                               | 268                                               |                 |                       |                                        |
| 255/40 R 21 XL    | 102           | 850              | 8½J                                                               | 265                                               |                 |                       |                                        |
|                   |               |                  | 9J                                                                | 270                                               | 745             | 346                   | 2250                                   |
|                   |               |                  | 9½J                                                               | 275                                               |                 |                       |                                        |
|                   |               |                  | 10J                                                               | 280                                               |                 |                       |                                        |
| HL 255/40 R 21 XL | 105           | 925              | 8½J                                                               | 265                                               |                 |                       |                                        |
|                   |               |                  | 9J                                                                | 270                                               | 745             | 346                   | 2250                                   |
|                   |               |                  | 9½J                                                               | 275                                               |                 |                       |                                        |
| 265/40 R 21       | 101           | 825              | 9J                                                                | 277                                               |                 |                       |                                        |
| 265/40 R 21 XL    | 105           | 925              | 9½J                                                               | 282                                               | 753             | 349                   | 2270                                   |
|                   |               |                  | 10J                                                               | 287                                               |                 |                       |                                        |
|                   |               |                  | 10½J                                                              | 292                                               |                 |                       |                                        |
| HL 265/40 R 21 XL | 108           | 1000             | 9J                                                                | 277                                               |                 |                       |                                        |
|                   |               |                  | 9½J                                                               | 282                                               | 753             | 349                   | 2270                                   |
|                   |               |                  | 10J                                                               | 287                                               |                 |                       |                                        |
| 275/40 R 21 XL    | 107           | 975              | 9J                                                                | 284                                               |                 |                       |                                        |
|                   |               |                  | 9½J                                                               | 289                                               | 761             | 352                   | 2295                                   |
|                   |               |                  | 10J                                                               | 294                                               |                 |                       |                                        |
|                   |               |                  | 10½J                                                              | 299                                               |                 |                       |                                        |
|                   |               |                  | 11J                                                               | 304                                               |                 |                       |                                        |
| 285/40 R 21 XL    | 109           | 1030             | 9½J                                                               | 297                                               |                 |                       |                                        |
|                   |               |                  | 10J                                                               | 302                                               | 771             | 355                   | 2320                                   |
|                   |               |                  | 10½J                                                              | 307                                               |                 |                       |                                        |
|                   |               |                  | 11J                                                               | 312                                               |                 |                       |                                        |

| Size              | Tyre          |                  | Permitted<br>rims <sup>1) 7)</sup><br><br>(measuring<br>rim bold) | Tyre dimensions<br>Max. standard<br>value in operation <sup>2)</sup> |                 | Radius <sup>3a)</sup><br><br>stat.<br>(mm) | Rolling<br>circumference <sup>3)</sup><br><br>(mm) |
|-------------------|---------------|------------------|-------------------------------------------------------------------|----------------------------------------------------------------------|-----------------|--------------------------------------------|----------------------------------------------------|
|                   | Load<br>Index | Load<br>capacity |                                                                   | Width<br>(mm)                                                        | Outer-Ø<br>(mm) |                                            |                                                    |
|                   | LI            | kg               |                                                                   |                                                                      |                 |                                            |                                                    |
| 40 series         |               |                  |                                                                   |                                                                      |                 |                                            |                                                    |
| HL 285/40 R 21 XL | 112           | 1120             | 9½J                                                               | 297                                                                  |                 |                                            |                                                    |
|                   |               |                  | 10J                                                               | 302                                                                  | 771             | 355                                        | 2320                                               |
|                   |               |                  | 10½J                                                              | 307                                                                  |                 |                                            |                                                    |
| 295/40 R 21 XL    | 111           | 1090             | 10J                                                               | 308                                                                  |                 |                                            |                                                    |
|                   |               |                  | 10½J                                                              | 313                                                                  | 779             | 359                                        | 2345                                               |
|                   |               |                  | 11J                                                               | 318                                                                  |                 |                                            |                                                    |
|                   |               |                  | 11½J                                                              | 323                                                                  |                 |                                            |                                                    |
| 315/40 R 21       | 111           | 1090             | 10½J                                                              | 328                                                                  |                 |                                            |                                                    |
| 315/40 R 21 XL    | 115           | 1215             | 11J                                                               | 333                                                                  | 795             | 365                                        | 2395                                               |
|                   |               |                  | 11½J                                                              | 338                                                                  |                 |                                            |                                                    |
|                   |               |                  | 12J                                                               | 343                                                                  |                 |                                            |                                                    |
|                   |               |                  | 12½J                                                              | 348                                                                  |                 |                                            |                                                    |
| 325/40 R 21       | 113           | 1150             | 11J                                                               | 339                                                                  |                 |                                            |                                                    |
|                   |               |                  | 11½J                                                              | 344                                                                  | 803             | 368                                        | 2420                                               |
|                   |               |                  | 12J                                                               | 349                                                                  |                 |                                            |                                                    |
|                   |               |                  | 12½J                                                              | 354                                                                  |                 |                                            |                                                    |
|                   |               |                  | 13J                                                               | 359                                                                  |                 |                                            |                                                    |
| 255/40 R 22 XL    | 103           | 875              | 8½J                                                               | 265                                                                  |                 |                                            |                                                    |
|                   |               |                  | 9J                                                                | 270                                                                  | 771             | 359                                        | 2325                                               |
|                   |               |                  | 9½J                                                               | 275                                                                  |                 |                                            |                                                    |
|                   |               |                  | 10J                                                               | 280                                                                  |                 |                                            |                                                    |
| 265/40 R 22 XL    | 106           | 950              | 9J                                                                | 277                                                                  |                 |                                            |                                                    |
|                   |               |                  | 9½J                                                               | 282                                                                  | 779             | 362                                        | 2350                                               |
|                   |               |                  | 10J                                                               | 287                                                                  |                 |                                            |                                                    |
|                   |               |                  | 10½J                                                              | 292                                                                  |                 |                                            |                                                    |
| HL 265/40 R 22 XL | 109           | 1030             | 9J                                                                | 277                                                                  |                 |                                            |                                                    |
|                   |               |                  | 9½J                                                               | 282                                                                  | 779             | 362                                        | 2350                                               |
|                   |               |                  | 10J                                                               | 287                                                                  |                 |                                            |                                                    |
| 275/40 R 22 XL    | 107           | 975              | 9J                                                                | 284                                                                  |                 |                                            |                                                    |
|                   |               |                  | 9½J                                                               | 289                                                                  | 787             | 365                                        | 2375                                               |
|                   |               |                  | 10J                                                               | 294                                                                  |                 |                                            |                                                    |
|                   |               |                  | 10½J                                                              | 299                                                                  |                 |                                            |                                                    |
|                   |               |                  | 11J                                                               | 304                                                                  |                 |                                            |                                                    |

| Size           | Tyre          |                  | Permitted<br>rims <sup>1) 7)</sup><br><br>(measuring<br>rim bold) | Tyre dimensions<br>Max. standard<br>value in operation <sup>2)</sup> |                 | Radius <sup>3a)</sup><br><br>stat.<br>(mm) | Rolling<br>circumference<br><br>(mm) |
|----------------|---------------|------------------|-------------------------------------------------------------------|----------------------------------------------------------------------|-----------------|--------------------------------------------|--------------------------------------|
|                | Load<br>Index | Load<br>capacity |                                                                   | Width<br>(mm)                                                        | Outer-Ø<br>(mm) |                                            |                                      |
|                | LI            | kg               |                                                                   |                                                                      |                 |                                            |                                      |
| 40 series      |               |                  |                                                                   |                                                                      |                 |                                            |                                      |
| 285/40 R 22    | 106           | 950              | 9½J                                                               | 297                                                                  |                 |                                            |                                      |
| 285/40 R 22 XL | 110           | 1060             | 10J                                                               | 302                                                                  | 797             | 368                                        | 2400                                 |
|                |               |                  | 10½J                                                              | 307                                                                  |                 |                                            |                                      |
|                |               |                  | 11J                                                               | 312                                                                  |                 |                                            |                                      |
| 295/40 R 22 XL | 112           | 1120             | 10J                                                               | 308                                                                  |                 |                                            |                                      |
|                |               |                  | 10½J                                                              | 313                                                                  | 805             | 372                                        | 2425                                 |
|                |               |                  | 11J                                                               | 318                                                                  |                 |                                            |                                      |
|                |               |                  | 11½J                                                              | 323                                                                  |                 |                                            |                                      |
| 325/40 R 22    | 114           | 1180             | 11J                                                               | 339                                                                  |                 |                                            |                                      |
|                |               |                  | 11½J                                                              | 344                                                                  | 829             | 381                                        | 2500                                 |
|                |               |                  | 12J                                                               | 349                                                                  |                 |                                            |                                      |
|                |               |                  | 12½J                                                              | 354                                                                  |                 |                                            |                                      |
|                |               |                  | 13J                                                               | 359                                                                  |                 |                                            |                                      |
| 285/40 R 23    | 107           | 975              | 9½J                                                               | 297                                                                  |                 |                                            |                                      |
| 285/40 R 23 XL | 111           | 1090             | 10J                                                               | 302                                                                  | 822             | 381                                        | 2475                                 |
|                |               |                  | 10½J                                                              | 307                                                                  |                 |                                            |                                      |
|                |               |                  | 11J                                                               | 312                                                                  |                 |                                            |                                      |
| 35 series      |               |                  |                                                                   |                                                                      |                 |                                            |                                      |
| 215/35 R 18 XL | 84            | 500              | 7J                                                                | 222                                                                  |                 |                                            |                                      |
|                |               |                  | 7½J                                                               | 227                                                                  | 613             | 287                                        | 1850                                 |
|                |               |                  | 8J                                                                | 232                                                                  |                 |                                            |                                      |
|                |               |                  | 8½J                                                               | 237                                                                  |                 |                                            |                                      |
| 225/35 R 18 XL | 87            | 545              | 7½J                                                               | 234                                                                  |                 |                                            |                                      |
|                |               |                  | 8J                                                                | 239                                                                  | 621             | 290                                        | 1875                                 |
|                |               |                  | 8½J                                                               | 244                                                                  |                 |                                            |                                      |
|                |               |                  | 9J                                                                | 249                                                                  |                 |                                            |                                      |
| 245/35 R 18    | 88            | 560              | 8J                                                                | 253                                                                  |                 |                                            |                                      |
| 245/35 R 18 XL | 92            | 630              | 8½J                                                               | 258                                                                  | 635             | 296                                        | 1920                                 |
|                |               |                  | 9J                                                                | 263                                                                  |                 |                                            |                                      |
|                |               |                  | 9½J                                                               | 268                                                                  |                 |                                            |                                      |
| 255/35 R 18    | 90            | 600              | 8½J                                                               | 265                                                                  |                 |                                            |                                      |
| 255/35 R 18 XL | 94            | 670              | 9J                                                                | 270                                                                  | 643             | 298                                        | 1935                                 |
|                |               |                  | 9½J                                                               | 275                                                                  |                 |                                            |                                      |
|                |               |                  | 10J                                                               | 280                                                                  |                 |                                            |                                      |

| Tyre              |               |                  | Permitted<br>rims <sup>1) 7)</sup> | Tyre dimensions                                   |                 | Radius <sup>3a)</sup> | Rolling<br>circumference <sup>3)</sup> |
|-------------------|---------------|------------------|------------------------------------|---------------------------------------------------|-----------------|-----------------------|----------------------------------------|
| Size              | Load<br>Index | Load<br>capacity |                                    | Max. standard<br>value in operation <sup>2)</sup> |                 |                       |                                        |
|                   | LI            | kg               | (measuring<br>rim bold)            | Width<br>(mm)                                     | Outer-Ø<br>(mm) | stat.<br>(mm)         | (mm)                                   |
| 35 series         |               |                  |                                    |                                                   |                 |                       |                                        |
| 265/35 R 18 XL    | 97            | 730              | 9J                                 | 277                                               |                 |                       |                                        |
|                   |               |                  | <b>9½J</b>                         | <b>282</b>                                        | <b>651</b>      | <b>301</b>            | <b>1960</b>                            |
|                   |               |                  | 10J                                | 287                                               |                 |                       |                                        |
|                   |               |                  | 10½J                               | 292                                               |                 |                       |                                        |
| 275/35 R 18       | 95            | 690              | 9J                                 | 284                                               |                 |                       |                                        |
|                   |               |                  | <b>9½J</b>                         | <b>289</b>                                        | <b>657</b>      | <b>303</b>            | <b>1980</b>                            |
|                   |               |                  | 10J                                | 294                                               |                 |                       |                                        |
|                   |               |                  | 10½J                               | 299                                               |                 |                       |                                        |
|                   |               |                  | 11J                                | 304                                               |                 |                       |                                        |
| 285/35 R 18 XL    | 101           | 825              | 9½J                                | 297                                               |                 |                       |                                        |
|                   |               |                  | <b>10J</b>                         | <b>302</b>                                        | <b>665</b>      | <b>307</b>            | <b>2005</b>                            |
|                   |               |                  | 10½J                               | 307                                               |                 |                       |                                        |
|                   |               |                  | 11J                                | 312                                               |                 |                       |                                        |
| 225/35 R 19 XL    | 88            | 560              | 7½J                                | 234                                               |                 |                       |                                        |
|                   |               |                  | <b>8J</b>                          | <b>239</b>                                        | <b>647</b>      | <b>303</b>            | <b>1955</b>                            |
|                   |               |                  | 8½J                                | 244                                               |                 |                       |                                        |
|                   |               |                  | 9J                                 | 249                                               |                 |                       |                                        |
| 235/35 R 19 XL    | 91            | 615              | 8J                                 | 246                                               |                 |                       |                                        |
|                   |               |                  | <b>8½J</b>                         | <b>251</b>                                        | <b>653</b>      | <b>305</b>            | <b>1975</b>                            |
|                   |               |                  | 9J                                 | 256                                               |                 |                       |                                        |
|                   |               |                  | 9½J                                | 261                                               |                 |                       |                                        |
| 245/35 R 19 XL    | 93            | 650              | 8J                                 | 253                                               |                 |                       |                                        |
|                   |               |                  | <b>8½J</b>                         | <b>258</b>                                        | <b>661</b>      | <b>309</b>            | <b>2000</b>                            |
|                   |               |                  | 9J                                 | 263                                               |                 |                       |                                        |
|                   |               |                  | 9½J                                | 268                                               |                 |                       |                                        |
| 255/35 R 19       | 92            | 630              | 8½J                                | 265                                               |                 |                       |                                        |
| 255/35 R 19 XL    | 96            | 710              | <b>9J</b>                          | <b>270</b>                                        | <b>669</b>      | <b>311</b>            | <b>2015</b>                            |
|                   |               |                  | 9½J                                | 275                                               |                 |                       |                                        |
|                   |               |                  | 10J                                | 280                                               |                 |                       |                                        |
| HL 255/35 R 19 XL | 99            | 775              | 8½J                                | 265                                               |                 |                       |                                        |
|                   |               |                  | <b>9J</b>                          | <b>270</b>                                        | <b>669</b>      | <b>311</b>            | <b>2015</b>                            |
|                   |               |                  | 9½J                                | 275                                               |                 |                       |                                        |
| 265/35 R 19 XL    | 98            | 750              | 9J                                 | 277                                               |                 |                       |                                        |
|                   |               |                  | <b>9½J</b>                         | <b>282</b>                                        | <b>677</b>      | <b>314</b>            | <b>2040</b>                            |
|                   |               |                  | 10J                                | 287                                               |                 |                       |                                        |
|                   |               |                  | 10½J                               | 292                                               |                 |                       |                                        |

| Tyre           |               |                  | Permitted<br>rims <sup>1) 7)</sup> | Tyre dimensions                                   |                 | Radius <sup>3a)</sup> | Rolling<br>circumference |
|----------------|---------------|------------------|------------------------------------|---------------------------------------------------|-----------------|-----------------------|--------------------------|
| Size           | Load<br>Index | Load<br>capacity |                                    | Max. standard<br>value in operation <sup>2)</sup> |                 |                       |                          |
|                | LI            | kg               | (measuring<br>rim bold)            | Width<br>(mm)                                     | Outer-Ø<br>(mm) | stat.<br>(mm)         | (mm)                     |
| 35 series      |               |                  |                                    |                                                   |                 |                       |                          |
| 275/35 R 19 XL | 100           | 800              | 9J                                 | 284                                               |                 |                       |                          |
|                |               |                  | <b>9½J</b>                         | <b>289</b>                                        | <b>683</b>      | <b>316</b>            | <b>2060</b>              |
|                |               |                  | 10J                                | 294                                               |                 |                       |                          |
|                |               |                  | 10½J                               | 299                                               |                 |                       |                          |
| 11J            | 304           |                  |                                    |                                                   |                 |                       |                          |
| 285/35 R 19    | 99            | 775              | 9½J                                | 297                                               |                 |                       |                          |
| 285/35 R 19 XL | 103           | 875              | <b>10J</b>                         | <b>302</b>                                        | <b>691</b>      | <b>320</b>            | <b>2085</b>              |
|                |               |                  | 10½J                               | 307                                               |                 |                       |                          |
|                |               |                  | 11J                                | 312                                               |                 |                       |                          |
| 295/35 R 19    | 100           | 800              | 10J                                | 308                                               |                 |                       |                          |
| 295/35 R 19 XL | 104           | 900              | <b>10½J</b>                        | <b>313</b>                                        | <b>697</b>      | <b>322</b>            | <b>2100</b>              |
|                |               |                  | 11J                                | 318                                               |                 |                       |                          |
|                |               |                  | 11½J                               | 323                                               |                 |                       |                          |
| 225/35 R 20 XL | 90            | 600              | 7½J                                | 234                                               |                 |                       |                          |
|                |               |                  | <b>8J</b>                          | <b>239</b>                                        | <b>672</b>      | <b>316</b>            | <b>2030</b>              |
|                |               |                  | 8½J                                | 244                                               |                 |                       |                          |
|                |               |                  | 9J                                 | 249                                               |                 |                       |                          |
| 235/35 R 20 XL | 92            | 630              | 8J                                 | 246                                               |                 |                       |                          |
|                |               |                  | <b>8½J</b>                         | <b>251</b>                                        | <b>678</b>      | <b>318</b>            | <b>2050</b>              |
|                |               |                  | 9J                                 | 256                                               |                 |                       |                          |
|                |               |                  | 9½J                                | 261                                               |                 |                       |                          |
| 245/35 R 20 XL | 95            | 690              | 8J                                 | 253                                               |                 |                       |                          |
|                |               |                  | <b>8½J</b>                         | <b>258</b>                                        | <b>686</b>      | <b>321</b>            | <b>2075</b>              |
|                |               |                  | 9J                                 | 263                                               |                 |                       |                          |
|                |               |                  | 9½J                                | 268                                               |                 |                       |                          |
| 255/35 R 20 XL | 97            | 730              | 8½J                                | 265                                               |                 |                       |                          |
|                |               |                  | <b>9J</b>                          | <b>270</b>                                        | <b>694</b>      | <b>323</b>            | <b>2090</b>              |
|                |               |                  | 9½J                                | 275                                               |                 |                       |                          |
|                |               |                  | 10J                                | 280                                               |                 |                       |                          |
| 265/35 R 20 XL | 99            | 775              | 9J                                 | 277                                               |                 |                       |                          |
|                |               |                  | <b>9½J</b>                         | <b>282</b>                                        | <b>702</b>      | <b>327</b>            | <b>2115</b>              |
|                |               |                  | 10J                                | 287                                               |                 |                       |                          |
|                |               |                  | 10½J                               | 292                                               |                 |                       |                          |

| Tyre              |               |                  | Permitted<br>rims <sup>1) 7)</sup> | Tyre dimensions                                   |                 | Radius <sup>3a)</sup> | Rolling<br>circumference <sup>3)</sup> |
|-------------------|---------------|------------------|------------------------------------|---------------------------------------------------|-----------------|-----------------------|----------------------------------------|
| Size              | Load<br>Index | Load<br>capacity |                                    | Max. standard<br>value in operation <sup>2)</sup> |                 |                       |                                        |
|                   | LI            | kg               | (measuring<br>rim bold)            | Width<br>(mm)                                     | Outer-Ø<br>(mm) | stat.<br>(mm)         | (mm)                                   |
| 35 series         |               |                  |                                    |                                                   |                 |                       |                                        |
| 275/35 R 20 XL    | 102           | 850              | 9J                                 | 284                                               |                 |                       |                                        |
|                   |               |                  | 9½J                                | 289                                               | 708             | 329                   | 2135                                   |
|                   |               |                  | 10J                                | 294                                               |                 |                       |                                        |
|                   |               |                  | 10½J                               | 299                                               |                 |                       |                                        |
|                   |               |                  | 11J                                | 304                                               |                 |                       |                                        |
| 285/35 R 20       | 100           | 800              | 9½J                                | 297                                               |                 |                       |                                        |
| 285/35 R 20 XL    | 104           | 900              | 10J                                | 302                                               | 716             | 332                   | 2160                                   |
|                   |               |                  | 10½J                               | 307                                               |                 |                       |                                        |
|                   |               |                  | 11J                                | 312                                               |                 |                       |                                        |
| 295/35 R 20 XL    | 105           | 925              | 10J                                | 308                                               |                 |                       |                                        |
|                   |               |                  | 10½J                               | 313                                               | 722             | 334                   | 2180                                   |
|                   |               |                  | 11J                                | 318                                               |                 |                       |                                        |
|                   |               |                  | 11½J                               | 323                                               |                 |                       |                                        |
| 315/35 R 20 XL    | 110           | 1060             | 10½J                               | 328                                               |                 |                       |                                        |
|                   |               |                  | 11J                                | 333                                               | 736             | 340                   | 2220                                   |
|                   |               |                  | 11½J                               | 338                                               |                 |                       |                                        |
|                   |               |                  | 12J                                | 343                                               |                 |                       |                                        |
|                   |               |                  | 12½J                               | 348                                               |                 |                       |                                        |
| 325/35 R 20       | 108           | 1000             | 11J                                | 339                                               |                 |                       |                                        |
|                   |               |                  | 11½J                               | 344                                               | 746             | 343                   | 2245                                   |
|                   |               |                  | 12J                                | 349                                               |                 |                       |                                        |
|                   |               |                  | 12½J                               | 354                                               |                 |                       |                                        |
|                   |               |                  | 13J                                | 359                                               |                 |                       |                                        |
| 245/35 R 21 XL    | 96            | 710              | 8J                                 | 253                                               |                 |                       |                                        |
|                   |               |                  | 8½J                                | 258                                               | 711             | 334                   | 2150                                   |
|                   |               |                  | 9J                                 | 263                                               |                 |                       |                                        |
|                   |               |                  | 9½J                                | 268                                               |                 |                       |                                        |
| 255/35 R 21 XL    | 98            | 750              | 8½J                                | 265                                               |                 |                       |                                        |
|                   |               |                  | 9J                                 | 270                                               | 719             | 336                   | 2170                                   |
|                   |               |                  | 9½J                                | 275                                               |                 |                       |                                        |
|                   |               |                  | 10J                                | 280                                               |                 |                       |                                        |
| HL 255/35 R 21 XL | 101           | 825              | 8½J                                | 265                                               |                 |                       |                                        |
|                   |               |                  | 9J                                 | 270                                               | 719             | 336                   | 2170                                   |
|                   |               |                  | 9½J                                | 275                                               |                 |                       |                                        |

| Size              | Tyre          |                  | Permitted<br>rims <sup>1) 7)</sup> | Tyre dimensions<br>Max. standard<br>value in operation <sup>2)</sup> |                 | Radius <sup>3a)</sup> | Rolling<br>circumference |
|-------------------|---------------|------------------|------------------------------------|----------------------------------------------------------------------|-----------------|-----------------------|--------------------------|
|                   | Load<br>Index | Load<br>capacity |                                    | Width<br>(mm)                                                        | Outer-Ø<br>(mm) |                       |                          |
|                   | LI            | kg               | (measuring<br>rim bold)            |                                                                      |                 |                       |                          |
| 35 series         |               |                  |                                    |                                                                      |                 |                       |                          |
| 265/35 R 21 XL    | 101           | 825              | 9J                                 | 277                                                                  |                 |                       |                          |
|                   |               |                  | 9½J                                | 282                                                                  | 727             | 339                   | 2195                     |
|                   |               |                  | 10J                                | 287                                                                  |                 |                       |                          |
|                   |               |                  | 10½J                               | 292                                                                  |                 |                       |                          |
| HL 265/35 R 21 XL | 103           | 875              | 9J                                 | 277                                                                  |                 |                       |                          |
|                   |               |                  | 9½J                                | 282                                                                  | 727             | 339                   | 2195                     |
|                   |               |                  | 10J                                | 287                                                                  |                 |                       |                          |
| 275/35 R 21 XL    | 103           | 875              | 9J                                 | 284                                                                  |                 |                       |                          |
|                   |               |                  | 9½J                                | 289                                                                  | 733             | 341                   | 2210                     |
|                   |               |                  | 10J                                | 294                                                                  |                 |                       |                          |
|                   |               |                  | 10½J                               | 299                                                                  |                 |                       |                          |
|                   |               |                  | 11J                                | 304                                                                  |                 |                       |                          |
| HL 275/35 R 21 XL | 105           | 925              | 9J                                 | 284                                                                  |                 |                       |                          |
|                   |               |                  | 9½J                                | 289                                                                  | 733             | 341                   | 2210                     |
|                   |               |                  | 10J                                | 294                                                                  |                 |                       |                          |
| 285/35 R 21 XL    | 105           | 925              | 9½J                                | 297                                                                  |                 |                       |                          |
|                   |               |                  | 10J                                | 302                                                                  | 741             | 345                   | 2235                     |
|                   |               |                  | 10½J                               | 307                                                                  |                 |                       |                          |
|                   |               |                  | 11J                                | 312                                                                  |                 |                       |                          |
| 295/35 R 21       | 103           | 875              | 10J                                | 308                                                                  |                 |                       |                          |
| 295/35 R 21 XL    | 107           | 975              | 10½J                               | 313                                                                  | 747             | 347                   | 2255                     |
|                   |               |                  | 11J                                | 318                                                                  |                 |                       |                          |
|                   |               |                  | 11½J                               | 323                                                                  |                 |                       |                          |
| 305/35 R 21 XL    | 109           | 1030             | 10J                                | 316                                                                  |                 |                       |                          |
|                   |               |                  | 10½J                               | 321                                                                  |                 |                       |                          |
|                   |               |                  | 11J                                | 326                                                                  | 755             | 350                   | 2280                     |
|                   |               |                  | 11½J                               | 331                                                                  |                 |                       |                          |
|                   |               |                  | 12J                                | 336                                                                  |                 |                       |                          |
| 315/35 R 21 XL    | 111           | 1090             | 10½J                               | 328                                                                  |                 |                       |                          |
|                   |               |                  | 11J                                | 333                                                                  | 761             | 352                   | 2295                     |
|                   |               |                  | 11½J                               | 338                                                                  |                 |                       |                          |
|                   |               |                  | 12J                                | 343                                                                  |                 |                       |                          |
|                   |               |                  | 12½J                               | 348                                                                  |                 |                       |                          |

| Size              | Tyre                    |                            | Permitted<br>rims <sup>1) 7)</sup><br><br>(measuring<br>rim bold) | Tyre dimensions<br>Max. standard<br>value in operation <sup>2)</sup> |                 | Radius <sup>3a)</sup><br><br>stat.<br>(mm) | Rolling<br>circumference <sup>3)</sup><br><br>(mm) |
|-------------------|-------------------------|----------------------------|-------------------------------------------------------------------|----------------------------------------------------------------------|-----------------|--------------------------------------------|----------------------------------------------------|
|                   | Load<br>Index<br><br>LI | Load<br>capacity<br><br>kg |                                                                   | Width<br>(mm)                                                        | Outer-Ø<br>(mm) |                                            |                                                    |
| 35 series         |                         |                            |                                                                   |                                                                      |                 |                                            |                                                    |
| 265/35 R 22 XL    | 102                     | 850                        | 9J                                                                | 277                                                                  |                 |                                            |                                                    |
|                   |                         |                            | 9½J                                                               | 282                                                                  | 753             | 352                                        | 2270                                               |
|                   |                         |                            | 10J                                                               | 287                                                                  |                 |                                            |                                                    |
|                   |                         |                            | 10½J                                                              | 292                                                                  |                 |                                            |                                                    |
| 275/35 R 22 XL    | 104                     | 900                        | 9J                                                                | 284                                                                  |                 |                                            |                                                    |
|                   |                         |                            | 9½J                                                               | 289                                                                  | 759             | 354                                        | 2290                                               |
|                   |                         |                            | 10J                                                               | 294                                                                  |                 |                                            |                                                    |
|                   |                         |                            | 10½J                                                              | 299                                                                  |                 |                                            |                                                    |
|                   |                         |                            | 11J                                                               | 304                                                                  |                 |                                            |                                                    |
| HL 275/35 R 22 XL | 107                     | 975                        | 9J                                                                | 284                                                                  |                 |                                            |                                                    |
|                   |                         |                            | 9½J                                                               | 289                                                                  | 759             | 354                                        | 2290                                               |
|                   |                         |                            | 10J                                                               | 294                                                                  |                 |                                            |                                                    |
| 285/35 R 22 XL    | 106                     | 950                        | 9½J                                                               | 297                                                                  |                 |                                            |                                                    |
|                   |                         |                            | 10J                                                               | 302                                                                  | 767             | 358                                        | 2315                                               |
|                   |                         |                            | 10½J                                                              | 307                                                                  |                 |                                            |                                                    |
|                   |                         |                            | 11J                                                               | 312                                                                  |                 |                                            |                                                    |
| HL 285/35 R 22 XL | 109                     | 1030                       | 9½J                                                               | 297                                                                  |                 |                                            |                                                    |
|                   |                         |                            | 10J                                                               | 302                                                                  | 767             | 358                                        | 2315                                               |
|                   |                         |                            | 10½J                                                              | 307                                                                  |                 |                                            |                                                    |
| 295/35 R 22 XL    | 108                     | 1000                       | 10J                                                               | 308                                                                  |                 |                                            |                                                    |
|                   |                         |                            | 10½J                                                              | 313                                                                  | 773             | 360                                        | 2335                                               |
|                   |                         |                            | 11J                                                               | 318                                                                  |                 |                                            |                                                    |
|                   |                         |                            | 11½J                                                              | 323                                                                  |                 |                                            |                                                    |
| 315/35 R 22 XL    | 111                     | 1090                       | 10½J                                                              | 328                                                                  |                 |                                            |                                                    |
|                   |                         |                            | 11J                                                               | 333                                                                  | 787             | 365                                        | 2375                                               |
|                   |                         |                            | 11½J                                                              | 338                                                                  |                 |                                            |                                                    |
|                   |                         |                            | 12J                                                               | 343                                                                  |                 |                                            |                                                    |
|                   |                         |                            | 12½J                                                              | 348                                                                  |                 |                                            |                                                    |
| 325/35 R 22       | 110                     | 1060                       | 11J                                                               | 339                                                                  |                 |                                            |                                                    |
| 325/35 R 22 XL    | 114                     | 1180                       | 11½J                                                              | 344                                                                  | 797             | 368                                        | 2400                                               |
|                   |                         |                            | 12J                                                               | 349                                                                  |                 |                                            |                                                    |
|                   |                         |                            | 12½J                                                              | 354                                                                  |                 |                                            |                                                    |
|                   |                         |                            | 13J                                                               | 359                                                                  |                 |                                            |                                                    |
| HL 275/35 R 23 XL | 108                     | 1000                       | 9J                                                                | 284                                                                  |                 |                                            |                                                    |
|                   |                         |                            | 9½J                                                               | 289                                                                  | 784             | 367                                        | 2365                                               |
|                   |                         |                            | 10J                                                               | 294                                                                  |                 |                                            |                                                    |

| Size           | Tyre          |                  | Permitted<br>rims <sup>1) 7)</sup><br><br>(measuring<br>rim bold) | Tyre dimensions<br>Max. standard<br>value in operation <sup>2)</sup> |                 | Radius <sup>3a)</sup><br><br>stat.<br>(mm) | Rolling<br>circumference<br><br>(mm) |
|----------------|---------------|------------------|-------------------------------------------------------------------|----------------------------------------------------------------------|-----------------|--------------------------------------------|--------------------------------------|
|                | Load<br>Index | Load<br>capacity |                                                                   | Width<br>(mm)                                                        | Outer-Ø<br>(mm) |                                            |                                      |
|                | LI            | kg               |                                                                   |                                                                      |                 |                                            |                                      |
| 35 series      |               |                  |                                                                   |                                                                      |                 |                                            |                                      |
| 285/35 R 23 XL | 107           | 975              | 9½J                                                               | 297                                                                  |                 |                                            |                                      |
|                |               |                  | 10J                                                               | 302                                                                  | 792             | 370                                        | 2390                                 |
|                |               |                  | 10½J<br>11J                                                       | 307<br>312                                                           |                 |                                            |                                      |
| 295/35 R 23 XL | 108           | 1000             | 10J                                                               | 308                                                                  |                 |                                            |                                      |
|                |               |                  | 10½J                                                              | 313                                                                  | 798             | 372                                        | 2410                                 |
|                |               |                  | 11J<br>11½J                                                       | 318<br>323                                                           |                 |                                            |                                      |
| 325/35 R 23    | 111           | 1090             | 11J                                                               | 339                                                                  |                 |                                            |                                      |
| 325/35 R 23 XL | 115           | 1215             | 11½J                                                              | 344                                                                  | 822             | 381                                        | 2475                                 |
|                |               |                  | 12J<br>12½J<br>13J                                                | 349<br>354<br>359                                                    |                 |                                            |                                      |
|                |               |                  |                                                                   |                                                                      |                 |                                            |                                      |
| 295/35 R 24 XL | 110           | 1060             | 10J                                                               | 308                                                                  |                 |                                            |                                      |
|                |               |                  | 10½J                                                              | 313                                                                  | 824             | 385                                        | 2490                                 |
|                |               |                  | 11J<br>11½J                                                       | 318<br>323                                                           |                 |                                            |                                      |
| 30 series      |               |                  |                                                                   |                                                                      |                 |                                            |                                      |
| 295/30 R 18    | 94            | 670              | 10J                                                               | 308                                                                  |                 |                                            |                                      |
|                |               |                  | 10½J                                                              | 313                                                                  | 643             | 298                                        | 1935                                 |
|                |               |                  | 11J                                                               | 318                                                                  |                 |                                            |                                      |
| 245/30 R 19 XL | 89            | 580              | 8J                                                                | 253                                                                  |                 |                                            |                                      |
|                |               |                  | 8½J                                                               | 258                                                                  | 637             | 299                                        | 1925                                 |
|                |               |                  | 9J                                                                | 263                                                                  |                 |                                            |                                      |
| 255/30 R 19 XL | 91            | 615              | 8½J                                                               | 265                                                                  |                 |                                            |                                      |
|                |               |                  | 9J                                                                | 270                                                                  | 643             | 302                                        | 1945                                 |
|                |               |                  | 9½J                                                               | 275                                                                  |                 |                                            |                                      |
| 265/30 R 19 XL | 93            | 650              | 9J                                                                | 277                                                                  |                 |                                            |                                      |
|                |               |                  | 9½J                                                               | 282                                                                  | 649             | 304                                        | 1960                                 |
|                |               |                  | 10J                                                               | 287                                                                  |                 |                                            |                                      |
| 275/30 R 19 XL | 96            | 710              | 9J                                                                | 284                                                                  |                 |                                            |                                      |
|                |               |                  | 9½J                                                               | 289                                                                  | 655             | 306                                        | 1980                                 |
|                |               |                  | 10J                                                               | 294                                                                  |                 |                                            |                                      |
| 285/30 R 19 XL | 98            | 750              | 9½J                                                               | 297                                                                  |                 |                                            |                                      |
|                |               |                  | 10J                                                               | 302                                                                  | 661             | 309                                        | 2000                                 |
|                |               |                  | 10½J                                                              | 307                                                                  |                 |                                            |                                      |

| Tyre           |               |                  | Permitted<br>rims <sup>1) 7)</sup><br><br>(measuring<br>rim bold) | Tyre dimensions                                   |                 | Radius <sup>3a)</sup><br><br>stat.<br>(mm) | Rolling<br>circumference <sup>3)</sup><br><br>(mm) |
|----------------|---------------|------------------|-------------------------------------------------------------------|---------------------------------------------------|-----------------|--------------------------------------------|----------------------------------------------------|
| Size           | Load<br>Index | Load<br>capacity |                                                                   | Max. standard<br>value in operation <sup>2)</sup> |                 |                                            |                                                    |
|                | LI            | kg               |                                                                   | Width<br>(mm)                                     | Outer-Ø<br>(mm) |                                            |                                                    |
| 30 series      |               |                  |                                                                   |                                                   |                 |                                            |                                                    |
| 295/30 R 19 XL | 100           | 800              | 10J                                                               | 308                                               |                 |                                            |                                                    |
|                |               |                  | 10½J                                                              | 313                                               | 669             | 311                                        | 2015                                               |
|                |               |                  | 11J                                                               | 318                                               |                 |                                            |                                                    |
| 305/30 R 19 XL | 102           | 850              | 10½J                                                              | 321                                               |                 |                                            |                                                    |
|                |               |                  | 11J                                                               | 326                                               | 675             | 313                                        | 2035                                               |
|                |               |                  | 11½J                                                              | 331                                               |                 |                                            |                                                    |
| 225/30 R 20 XL | 85            | 515              | 8J                                                                | 239                                               | 650             | 307                                        | 1965                                               |
| 235/30 R 20 XL | 88            | 560              | 8½J                                                               | 251                                               | 656             | 309                                        | 1985                                               |
| 245/30 R 20 XL | 90            | 600              | 8J                                                                | 253                                               |                 |                                            |                                                    |
|                |               |                  | 8½J                                                               | 258                                               | 662             | 312                                        | 2000                                               |
|                |               |                  | 9J                                                                | 263                                               |                 |                                            |                                                    |
| 255/30 R 20 XL | 92            | 630              | 8½J                                                               | 265                                               |                 |                                            |                                                    |
|                |               |                  | 9J                                                                | 270                                               | 668             | 314                                        | 2020                                               |
|                |               |                  | 9½J                                                               | 275                                               |                 |                                            |                                                    |
| 265/30 R 20 XL | 94            | 670              | 9J                                                                | 277                                               |                 |                                            |                                                    |
|                |               |                  | 9½J                                                               | 282                                               | 674             | 316                                        | 2035                                               |
|                |               |                  | 10J                                                               | 287                                               |                 |                                            |                                                    |
| 275/30 R 20 XL | 97            | 730              | 9J                                                                | 284                                               |                 |                                            |                                                    |
|                |               |                  | 9½J                                                               | 289                                               | 680             | 319                                        | 2055                                               |
|                |               |                  | 10J                                                               | 294                                               |                 |                                            |                                                    |
| 285/30 R 20 XL | 99            | 775              | 9½J                                                               | 297                                               |                 |                                            |                                                    |
|                |               |                  | 10J                                                               | 302                                               | 686             | 321                                        | 2075                                               |
|                |               |                  | 10½J                                                              | 307                                               |                 |                                            |                                                    |
| 295/30 R 20 XL | 101           | 825              | 10J                                                               | 308                                               |                 |                                            |                                                    |
|                |               |                  | 10½J                                                              | 313                                               | 694             | 323                                        | 2090                                               |
|                |               |                  | 11J                                                               | 318                                               |                 |                                            |                                                    |
| 305/30 R 20 XL | 103           | 875              | 10½J                                                              | 321                                               |                 |                                            |                                                    |
|                |               |                  | 11J                                                               | 326                                               | 700             | 326                                        | 2110                                               |
|                |               |                  | 11½J                                                              | 331                                               |                 |                                            |                                                    |
| 245/30 R 21 XL | 91            | 615              | 8J                                                                | 253                                               |                 |                                            |                                                    |
|                |               |                  | 8½J                                                               | 258                                               | 687             | 324                                        | 2075                                               |
|                |               |                  | 9J                                                                | 263                                               |                 |                                            |                                                    |
| 255/30 R 21 XL | 93            | 650              | 8½J                                                               | 265                                               |                 |                                            |                                                    |
|                |               |                  | 9J                                                                | 270                                               | 693             | 327                                        | 2095                                               |
|                |               |                  | 9½J                                                               | 275                                               |                 |                                            |                                                    |

| Tyre              |               |                  | Permitted<br>rims <sup>1) 7)</sup><br><br>(measuring<br>rim bold) | Tyre dimensions                                   |                 | Radius <sup>3a)</sup> | Rolling<br>circumference <sup>3)</sup><br><br>(mm) |
|-------------------|---------------|------------------|-------------------------------------------------------------------|---------------------------------------------------|-----------------|-----------------------|----------------------------------------------------|
| Size              | Load<br>Index | Load<br>capacity |                                                                   | Max. standard<br>value in operation <sup>2)</sup> |                 | stat.<br>(mm)         |                                                    |
|                   | LI            | kg               |                                                                   | Width<br>(mm)                                     | Outer-Ø<br>(mm) |                       |                                                    |
| 30 series         |               |                  |                                                                   |                                                   |                 |                       |                                                    |
| 265/30 R 21 XL    | 96            | 710              | 9J                                                                | 277                                               |                 |                       |                                                    |
|                   |               |                  | 9½J                                                               | 282                                               | 699             | 329                   | 2115                                               |
|                   |               |                  | 10J                                                               | 287                                               |                 |                       |                                                    |
| 275/30 R 21 XL    | 98            | 750              | 9J                                                                | 284                                               |                 |                       |                                                    |
|                   |               |                  | 9½J                                                               | 289                                               | 705             | 331                   | 2130                                               |
|                   |               |                  | 10J                                                               | 294                                               |                 |                       |                                                    |
| 285/30 R 21 XL    | 100           | 800              | 9½J                                                               | 297                                               |                 |                       |                                                    |
|                   |               |                  | 10J                                                               | 302                                               | 711             | 334                   | 2150                                               |
|                   |               |                  | 10½J                                                              | 307                                               |                 |                       |                                                    |
| HL 285/30 R 21 XL | 103           | 875              | 9½J                                                               | 297                                               |                 |                       |                                                    |
|                   |               |                  | 10J                                                               | 302                                               | 711             | 334                   | 2150                                               |
|                   |               |                  | 10½J                                                              | 307                                               |                 |                       |                                                    |
| 295/30 R 21 XL    | 102           | 850              | 10J                                                               | 308                                               |                 |                       |                                                    |
|                   |               |                  | 10½J                                                              | 313                                               | 719             | 336                   | 2170                                               |
|                   |               |                  | 11J                                                               | 318                                               |                 |                       |                                                    |
| 305/30 R 21 XL    | 104           | 900              | 10½J                                                              | 321                                               |                 |                       |                                                    |
|                   |               |                  | 11J                                                               | 326                                               | 725             | 338                   | 2185                                               |
|                   |               |                  | 11½J                                                              | 331                                               |                 |                       |                                                    |
| HL 305/30 R 21 XL | 107           | 975              | 10½J                                                              | 321                                               |                 |                       |                                                    |
|                   |               |                  | 11J                                                               | 326                                               | 725             | 338                   | 2185                                               |
|                   |               |                  | 11½J                                                              | 331                                               |                 |                       |                                                    |
| 315/30 R 21 XL    | 105           | 925              | 10½J                                                              | 328                                               |                 |                       |                                                    |
|                   |               |                  | 11J                                                               | 333                                               | 731             | 341                   | 2205                                               |
|                   |               |                  | 11½J                                                              | 338                                               |                 |                       |                                                    |
| HL 315/30 R 21 XL | 109           | 1030             | 10½J                                                              | 328                                               |                 |                       |                                                    |
|                   |               |                  | 11J                                                               | 333                                               | 731             | 341                   | 2205                                               |
|                   |               |                  | 11½J                                                              | 338                                               |                 |                       |                                                    |
| 325/30 R 21 XL    | 108           | 1000             | 11J                                                               | 339                                               |                 |                       |                                                    |
|                   |               |                  | 11½J                                                              | 344                                               | 737             | 343                   | 2225                                               |
|                   |               |                  | 12J                                                               | 349                                               |                 |                       |                                                    |
| 255/30 R 22 XL    | 95            | 690              | 8½J                                                               | 265                                               |                 |                       |                                                    |
|                   |               |                  | 9J                                                                | 270                                               | 719             | 340                   | 2175                                               |
|                   |               |                  | 9½J                                                               | 275                                               |                 |                       |                                                    |
| 265/30 R 22 XL    | 97            | 730              | 9J                                                                | 277                                               |                 |                       |                                                    |
|                   |               |                  | 9½J                                                               | 282                                               | 725             | 342                   | 2195                                               |
|                   |               |                  | 10J                                                               | 287                                               |                 |                       |                                                    |

| Size              | Tyre          |                  | Permitted<br>rims <sup>1) 7)</sup><br><br>(measuring<br>rim bold) | Tyre dimensions<br>Max. standard<br>value in operation <sup>2)</sup> |                 | Radius <sup>3a)</sup> | Rolling<br>circumference <sup>3)</sup> |
|-------------------|---------------|------------------|-------------------------------------------------------------------|----------------------------------------------------------------------|-----------------|-----------------------|----------------------------------------|
|                   | Load<br>Index | Load<br>capacity |                                                                   | Width<br>(mm)                                                        | Outer-Ø<br>(mm) | stat.<br>(mm)         | (mm)                                   |
|                   | LI            | kg               |                                                                   |                                                                      |                 |                       |                                        |
| 30 series         |               |                  |                                                                   |                                                                      |                 |                       |                                        |
| 285/30 R 22 XL    | 101           | 825              | 9½J                                                               | 297                                                                  |                 |                       |                                        |
|                   |               |                  | 10J                                                               | 302                                                                  | 737             | 347                   | 2230                                   |
|                   |               |                  | 10½J                                                              | 307                                                                  |                 |                       |                                        |
| 295/30 R 22 XL    | 103           | 875              | 10J                                                               | 308                                                                  |                 |                       |                                        |
|                   |               |                  | 10½J                                                              | 313                                                                  | 745             | 349                   | 2250                                   |
|                   |               |                  | 11J                                                               | 318                                                                  |                 |                       |                                        |
| 315/30 R 22 XL    | 107           | 975              | 10½J                                                              | 328                                                                  |                 |                       |                                        |
|                   |               |                  | 11J                                                               | 333                                                                  | 757             | 354                   | 2285                                   |
|                   |               |                  | 11½J                                                              | 338                                                                  |                 |                       |                                        |
| 305/30 R 23 XL    | 105           | 925              | 10½J                                                              | 321                                                                  |                 |                       |                                        |
|                   |               |                  | 11J                                                               | 326                                                                  | 776             | 364                   | 2340                                   |
|                   |               |                  | 11½J                                                              | 331                                                                  |                 |                       |                                        |
| HL 315/30 R 23 XL | 111           | 1090             | 10½J                                                              | 328                                                                  |                 |                       |                                        |
|                   |               |                  | 11J                                                               | 333                                                                  | 782             | 366                   | 2360                                   |
|                   |               |                  | 11½J                                                              | 338                                                                  |                 |                       |                                        |
| 335/30 R 23 XL    | 111           | 1090             | 11½J                                                              | 352                                                                  |                 |                       |                                        |
|                   |               |                  | 12J                                                               | 357                                                                  | 794             | 371                   | 2395                                   |
|                   |               |                  | 12½J                                                              | 362                                                                  |                 |                       |                                        |
| HL 295/30 R 24 XL | 108           | 1000             | 10J                                                               | 308                                                                  |                 |                       |                                        |
|                   |               |                  | 10½J                                                              | 313                                                                  | 796             | 374                   | 2405                                   |
|                   |               |                  | 11J                                                               | 318                                                                  |                 |                       |                                        |
| 335/30 R 24 XL    | 112           | 1120             | 11½J                                                              | 352                                                                  |                 |                       |                                        |
|                   |               |                  | 12J                                                               | 357                                                                  | 820             | 384                   | 2475                                   |
|                   |               |                  | 12½J                                                              | 362                                                                  |                 |                       |                                        |
| 25 series         |               |                  |                                                                   |                                                                      |                 |                       |                                        |
| 315/25 R 19 XL    | 98            | 750              | 11J                                                               | 333                                                                  |                 |                       |                                        |
|                   |               |                  | 11½J                                                              | 338                                                                  | 647             | 303                   | 1955                                   |
|                   |               |                  | 12J                                                               | 343                                                                  |                 |                       |                                        |
| 285/25 R 20 XL    | 93            | 650              | 10½J                                                              | 307                                                                  | 656             | 309                   | 1985                                   |
| 295/25 R 20 XL    | 95            | 690              | 10J                                                               | 308                                                                  |                 |                       |                                        |
|                   |               |                  | 10½J                                                              | 313                                                                  | 662             | 312                   | 2000                                   |
|                   |               |                  | 11J                                                               | 318                                                                  |                 |                       |                                        |
| 305/25 R 20 XL    | 97            | 730              | 10½J                                                              | 321                                                                  |                 |                       |                                        |
|                   |               |                  | 11J                                                               | 326                                                                  | 666             | 313                   | 2015                                   |
|                   |               |                  | 11½J                                                              | 331                                                                  |                 |                       |                                        |

| Size              | Tyre          |                  | Permitted<br>rims <sup>1) 7)</sup><br><br>(measuring<br>rim bold) | Tyre dimensions<br>Max. standard<br>value in operation <sup>2)</sup> |                 | Radius <sup>3a)</sup><br><br>stat.<br>(mm) | Rolling<br>circumference <sup>3)</sup><br><br>(mm) |
|-------------------|---------------|------------------|-------------------------------------------------------------------|----------------------------------------------------------------------|-----------------|--------------------------------------------|----------------------------------------------------|
|                   | Load<br>Index | Load<br>capacity |                                                                   | Width<br>(mm)                                                        | Outer-Ø<br>(mm) |                                            |                                                    |
|                   | LI            | kg               |                                                                   |                                                                      |                 |                                            |                                                    |
| 25 series         |               |                  |                                                                   |                                                                      |                 |                                            |                                                    |
| 325/25 R 20 XL    | 101           | 825              | 11½J                                                              | 344                                                                  |                 |                                            |                                                    |
|                   |               |                  | 12J                                                               | 349                                                                  | 676             | 317                                        | 2045                                               |
|                   |               |                  | 12½J                                                              | 354                                                                  |                 |                                            |                                                    |
| 275/25 R 21 XL    | 92            | 630              | 10J                                                               | 294                                                                  | 677             | 320                                        | 2045                                               |
| 295/25 R 21 XL    | 96            | 710              | 10J                                                               | 308                                                                  |                 |                                            |                                                    |
|                   |               |                  | 10½J                                                              | 313                                                                  | 687             | 324                                        | 2075                                               |
|                   |               |                  | 11J                                                               | 318                                                                  |                 |                                            |                                                    |
| 305/25 R 21 XL    | 98            | 750              | 10½J                                                              | 321                                                                  |                 |                                            |                                                    |
|                   |               |                  | 11J                                                               | 326                                                                  | 691             | 326                                        | 2090                                               |
|                   |               |                  | 11½J                                                              | 331                                                                  |                 |                                            |                                                    |
| 325/25 R 21 XL    | 102           | 850              | 11½J                                                              | 344                                                                  |                 |                                            |                                                    |
|                   |               |                  | 12J                                                               | 349                                                                  | 701             | 330                                        | 2120                                               |
|                   |               |                  | 12½J                                                              | 354                                                                  |                 |                                            |                                                    |
| 305/25 R 22 XL    | 99            | 775              | 10½J                                                              | 321                                                                  |                 |                                            |                                                    |
|                   |               |                  | 11J                                                               | 326                                                                  | 717             | 339                                        | 2170                                               |
|                   |               |                  | 11½J                                                              | 331                                                                  |                 |                                            |                                                    |
| 315/25 R 22 XL    | 101           | 825              | 11J                                                               | 333                                                                  |                 |                                            |                                                    |
|                   |               |                  | 11½J                                                              | 338                                                                  | 723             | 341                                        | 2185                                               |
|                   |               |                  | 12J                                                               | 343                                                                  |                 |                                            |                                                    |
| 335/25 R 22 XL    | 105           | 925              | 11½J                                                              | 352                                                                  |                 |                                            |                                                    |
|                   |               |                  | 12J                                                               | 357                                                                  | 733             | 345                                        | 2215                                               |
|                   |               |                  | 12½J                                                              | 362                                                                  |                 |                                            |                                                    |
| 315/25 R 23 XL    | 102           | 850              | 11J                                                               | 333                                                                  |                 |                                            |                                                    |
|                   |               |                  | 11½J                                                              | 338                                                                  | 748             | 354                                        | 2265                                               |
|                   |               |                  | 12J                                                               | 343                                                                  |                 |                                            |                                                    |
| HL 345/25 R 24 XL | 111           | 1090             | 12J                                                               | 364                                                                  |                 |                                            |                                                    |
|                   |               |                  | 12½J                                                              | 369                                                                  | 788             | 372                                        | 2385                                               |
|                   |               |                  | 13J                                                               | 374                                                                  |                 |                                            |                                                    |

| Tyre           |            |            | Tyre dimensions                                              |               |                 |                                 |  | Rolling<br>circum-<br>ference <sup>3)</sup> | Load Index | Wheel<br>position <sup>10)</sup> | Load capacity (kg) per axle at a tyre pressure (bar) |                       |              |              |              |                       |              |  |
|----------------|------------|------------|--------------------------------------------------------------|---------------|-----------------|---------------------------------|--|---------------------------------------------|------------|----------------------------------|------------------------------------------------------|-----------------------|--------------|--------------|--------------|-----------------------|--------------|--|
| Size           | Load Range | Load Index | Max. standard<br>value in operation <sup>2)</sup>            |               |                 | New tyre on<br>measuring<br>rim |  |                                             |            |                                  | 2.5                                                  | <sup>11)</sup><br>3.0 | 3.5          | 4.0          | 4.5          | <sup>12)</sup><br>5.0 | 5.5          |  |
|                |            |            | Permitted Rim width <sup>1) 7)</sup><br>(measuring rim bold) | Width<br>(mm) | Outer-Ø<br>(mm) |                                 |  |                                             |            |                                  |                                                      |                       |              |              |              |                       |              |  |
| Width<br>(mm)  |            |            |                                                              |               |                 |                                 |  |                                             |            |                                  |                                                      |                       |              |              |              |                       |              |  |
|                |            |            |                                                              |               |                 |                                 |  |                                             |            |                                  |                                                      |                       |              |              |              |                       |              |  |
| LT sizes       |            |            |                                                              |               |                 |                                 |  |                                             |            |                                  |                                                      |                       |              |              |              |                       |              |  |
| 15 inch        |            |            |                                                              |               |                 |                                 |  |                                             |            |                                  |                                                      |                       |              |              |              |                       |              |  |
| LT 215/80 R 15 | E          | 112/109 S  | 5½J, <b>6J</b> , 6½J, 7J                                     | 229           | 745             | 216                             |  | 2215                                        | 112<br>109 | S<br>D                           | 1190<br>2190                                         | 1375<br>2535          | 1560<br>2865 | 1735<br>3190 | 1905<br>3505 | 2075<br>3815          | 2240<br>4120 |  |
| LT 215/75 R 15 | D          | 106/103 Q  | 5½J, <b>6J</b> , 6½J, 7J                                     | 229           | 723             | 216                             |  | 2150                                        | 106<br>103 | S<br>D                           | 1185<br>2185                                         | 1370<br>2530          | 1550<br>2860 | 1725<br>3185 | 1900<br>3500 |                       |              |  |
| LT 235/75 R 15 | D          | 110/107 Q  | 6J, <b>6½J</b> , 7J, 7½J, 8J                                 | 249           | 753             | 235                             |  | 2240                                        | 110<br>107 | S<br>D                           | 1320<br>2435                                         | 1530<br>2815          | 1730<br>3185 | 1925<br>3545 | 2120<br>3900 |                       |              |  |
| LT 245/75 R 15 | D          | 113/110 S  | 6½J, <b>7J</b> , 7½J, 8J, 8½J                                | 263           | 769             | 248                             |  | 2290                                        | 113<br>110 | S<br>D                           | 1435<br>2645                                         | 1660<br>3065          | 1880<br>3465 | 2090<br>3855 | 2300<br>4240 |                       |              |  |
| 16 inch        |            |            |                                                              |               |                 |                                 |  |                                             |            |                                  |                                                      |                       |              |              |              |                       |              |  |
| LT 235/85 R 16 | E          | 120/116 S  | 6J, <b>6½J</b> , 7J, 7½J                                     | 249           | 828             | 235                             |  | 2460                                        | 120<br>116 | S<br>D                           | 1490<br>2660                                         | 1720<br>3075          | 1950<br>3480 | 2170<br>3875 | 2380<br>4255 | 2590<br>4630          | 2800<br>5000 |  |
| LT 225/75 R 16 | E          | 115/112 S  | <b>6J</b> , 6½J, 7J, 7½J                                     | 236           | 764             | 223                             |  | 2275                                        | 115<br>112 | S<br>D                           | 1290<br>2380                                         | 1495<br>2755          | 1690<br>3120 | 1880<br>3470 | 2065<br>3815 | 2250<br>4150          | 2430<br>4480 |  |
| LT 245/75 R 16 | E          | 120/116 S  | 6½J, <b>7J</b> , 7½J, 8J                                     | 263           | 795             | 248                             |  | 2365                                        | 120<br>116 | S<br>D                           | 1490<br>2660                                         | 1720<br>3075          | 1950<br>3480 | 2170<br>3875 | 2380<br>4255 | 2590<br>4630          | 2800<br>5000 |  |
| LT 265/75 R 16 | E          | 112/109 Q  | 7J, <b>7½J</b> , 8J, 8½J, 9J                                 | 283           | 826             | 267                             |  | 2455                                        | 123        | S                                | 1645                                                 | 1905                  | 2155         | 2400         | 2640         | 2870                  | 3100         |  |
|                |            |            |                                                              |               |                 |                                 |  |                                             | 121        | S                                | 1540                                                 | 1785                  | 2020         | 2245         | 2465         | 2685                  | 2900         |  |
|                | E          | 119/116 S  |                                                              |               |                 |                                 |  |                                             | 119        | S                                | 1445                                                 | 1670                  | 1890         | 2105         | 2315         | 2520                  | 2720         |  |
|                |            |            |                                                              |               |                 |                                 |  |                                             | 112        | S                                | 1190                                                 | 1375                  | 1560         | 1735         | 1905         | 2075                  | 2240         |  |
|                |            |            |                                                              |               |                 |                                 |  |                                             | 120        | D                                | 2980                                                 | 3445                  | 3900         | 4340         | 4765         | 5185                  | 5600         |  |
|                | E          | 121/118 Q  |                                                              |               |                 |                                 |  |                                             | 118        | D                                | 2805                                                 | 3250                  | 3675         | 4090         | 4495         | 4890                  | 5280         |  |
|                | E          | 123/120 S  |                                                              |               |                 |                                 |  |                                             | 116        | D                                | 2660                                                 | 3075                  | 3480         | 3875         | 4255         | 4630                  | 5000         |  |
|                |            |            |                                                              |               |                 |                                 |  |                                             | 109        | D                                | 2190                                                 | 2535                  | 2865         | 3190         | 3505         | 3815                  | 4120         |  |
| LT 285/75 R 16 | D          | 116/113 Q  | 7½J, <b>8J</b> , 8½J, 9J, 9½J                                | 303           | 858             | 286                             |  | 2545                                        | 121        | S                                | 1810                                                 | 2095                  | 2370         | 2635         | 2900         |                       |              |  |
|                |            |            |                                                              |               |                 |                                 |  |                                             | 116        | S                                | 1560                                                 | 1805                  | 2040         | 2275         | 2500         |                       |              |  |
|                | D          | 121/118 R  |                                                              |               |                 |                                 |  |                                             | 118        | D                                | 3295                                                 | 3815                  | 4315         | 4805         | 5280         |                       |              |  |
|                |            |            |                                                              |               |                 |                                 |  |                                             | 113        | D                                | 2870                                                 | 3325                  | 3760         | 4185         | 4600         |                       |              |  |
| LT 235/70 R 16 | D          | 110/107 S  | 6J, 6½J, <b>7J</b> , 7½J, 8J                                 | 254           | 756             | 240                             |  | 2250                                        | 110<br>107 | S<br>D                           | 1320<br>2435                                         | 1530<br>2815          | 1730<br>3185 | 1925<br>3545 | 2120<br>3900 |                       |              |  |
| LT 245/70 R 16 | D          | 113/110 T  | 6½J, <b>7J</b> , 7½J, 8J                                     | 263           | 770             | 248                             |  | 2290                                        | 113<br>110 | S<br>D                           | 1435<br>2645                                         | 1660<br>3065          | 1880<br>3465 | 2090<br>3855 | 2300<br>4240 |                       |              |  |
| LT 255/70 R 16 | E          | 120/117 S  | 6½J, 7J, <b>7½J</b> , 8J, 8½J                                | 276           | 784             | 260                             |  | 2335                                        | 120<br>117 | S<br>D                           | 1490<br>2735                                         | 1720<br>3160          | 1950<br>3580 | 2170<br>3980 | 2380<br>4375 | 2590<br>4760          | 2800<br>5140 |  |

\*\*) Load Range, standardized according to TRA (Tyre and Rim Association, USA). Classifies the max. load capacity of a tyre, corresponding PR. LR B equals 4 PR, LR C - 6 PR, LR D - 8 PR, LR E - 10 PR.

| Tyre           |            |            | Tyre dimensions                                              |            |                 |                                 |  | Rolling<br>circum-<br>ference <sup>3)</sup> | Load Index | Wheel<br>position <sup>10)</sup> | Load capacity (kg) per axle at a tyre pressure (bar) |                       |              |              |              |                       |              |               |  |  |  |  |
|----------------|------------|------------|--------------------------------------------------------------|------------|-----------------|---------------------------------|--|---------------------------------------------|------------|----------------------------------|------------------------------------------------------|-----------------------|--------------|--------------|--------------|-----------------------|--------------|---------------|--|--|--|--|
| Size           | Load Range | Load Index | Max. standard<br>value in operation <sup>2)</sup>            |            |                 | New tyre on<br>measuring<br>rim |  |                                             |            |                                  | 2.5                                                  | <sup>11)</sup><br>3.0 | 3.5          | 4.0          | 4.5          | <sup>12)</sup><br>5.0 | 5.5          |               |  |  |  |  |
|                |            |            | Permitted Rim width <sup>1) 7)</sup><br>(measuring rim bold) | Width (mm) | Outer-Ø<br>(mm) |                                 |  |                                             |            |                                  |                                                      |                       |              |              |              |                       |              | Width<br>(mm) |  |  |  |  |
| LT sizes       |            |            |                                                              |            |                 |                                 |  |                                             |            |                                  |                                                      |                       |              |              |              |                       |              |               |  |  |  |  |
| 16 inch        |            |            |                                                              |            |                 |                                 |  |                                             |            |                                  |                                                      |                       |              |              |              |                       |              |               |  |  |  |  |
| LT 265/70 R 16 | E          | 121/118 Q  | 7J, 7½J, <b>8J</b> , 8½J, 9J                                 | 288        | 800             | 272                             |  | 2375                                        | 121<br>118 | S<br>D                           | 1540<br>2805                                         | 1785<br>3250          | 2020<br>3675 | 2245<br>4090 | 2465<br>4495 | 2685<br>4890          | 2900<br>5280 |               |  |  |  |  |
| LT 215/65 R 16 | D          | 103/100 S  | <b>6½J</b> , 7J, 7½J                                         | 234        | 704             | 221                             |  | 2095                                        | 103<br>100 | S<br>D                           | 1090<br>1995                                         | 1265<br>2310          | 1430<br>2615 | 1590<br>2910 | 1750<br>3200 |                       |              |               |  |  |  |  |
| 17 inch        |            |            |                                                              |            |                 |                                 |  |                                             |            |                                  |                                                      |                       |              |              |              |                       |              |               |  |  |  |  |
| LT 255/75 R 17 | E          | 111/108 Q  | 6½J, <b>7J</b> , 7½J, 8J, 8½J                                | 270        | 836             | 255                             |  | 2485                                        | 111<br>108 | S<br>D                           | 1665<br>3055                                         | 1925<br>3535          | 2180<br>4000 |              |              |                       |              |               |  |  |  |  |
| LT 225/70 R 17 | E          | 115/112 S  | 5½J, 6J, <b>6½J</b> , 7J, 7½J                                | 242        | 766             | 228                             |  | 2285                                        | 115<br>112 | S<br>D                           | 1290<br>2380                                         | 1495<br>2755          | 1690<br>3120 | 1880<br>3470 | 2065<br>3815 | 2250<br>4150          | 2430<br>4480 |               |  |  |  |  |
| LT 245/70 R 17 | E          | 119/116 Q  | 6½J, 7J, <b>7½J</b> , 8J                                     | 263        | 796             | 248                             |  | 2370                                        | 119<br>116 | S<br>D                           | 1445<br>2660                                         | 1670<br>3075          | 1890<br>3480 | 2105<br>3875 | 2315<br>4255 | 2520<br>4630          | 2720<br>5000 |               |  |  |  |  |
| LT 265/70 R 17 | C          | 112/109 T  | 7J, 7½J, <b>8J</b> , 8½J, 9J                                 | 288        | 826             | 272                             |  | 2545                                        | 121        | S                                | 2215                                                 | 2560                  | 2900         |              |              |                       |              |               |  |  |  |  |
|                | C          | 121/118 S  |                                                              |            |                 |                                 |  |                                             | 112        | S                                | 1710                                                 | 1980                  | 2240         |              |              |                       |              |               |  |  |  |  |
|                |            |            |                                                              |            |                 |                                 |  |                                             | 118        | D                                | 4030                                                 | 4665                  | 5280         |              |              |                       |              |               |  |  |  |  |
|                |            |            |                                                              |            |                 |                                 |  |                                             | 109        | D                                | 3145                                                 | 3640                  | 4120         |              |              |                       |              |               |  |  |  |  |
| LT 285/70 R 17 | E          | 116/113 S  | 7½J, 8J, <b>8½J</b> , 9J, 9½J                                | 310        | 854             | 292                             |  | 2540                                        | 121        | S                                | 1810                                                 | 2095                  | 2370         | 2635         | 2900         |                       |              |               |  |  |  |  |
|                | E          | 121/118 Q  |                                                              |            |                 |                                 |  |                                             | 116        | S                                | 1560                                                 | 1805                  | 2040         | 2275         | 2500         |                       |              |               |  |  |  |  |
|                |            |            |                                                              |            |                 |                                 |  |                                             | 118        | D                                | 3295                                                 | 3815                  | 4315         | 4805         | 5280         |                       |              |               |  |  |  |  |
|                |            |            |                                                              |            |                 |                                 |  |                                             | 113        | D                                | 2870                                                 | 3325                  | 3760         | 4185         | 4600         |                       |              |               |  |  |  |  |
| LT 295/70 R 17 | E          | 121/118 Q  | 7½J, 8J, <b>8½J</b> , 9J, 9½J, 10J                           | 317        | 868             | 299                             |  | 2580                                        | 121<br>118 | S<br>D                           | 1810<br>3295                                         | 2095<br>3815          | 2370<br>4315 | 2635<br>4805 | 2900<br>5280 |                       |              |               |  |  |  |  |
| LT 315/70 R 17 | E          | 121/118 S  | 8J, 8½J, 9J, <b>9½J</b> , 10J, 10½J                          | 342        | 898             | 323                             |  | 2650                                        | 121<br>118 | S<br>D                           | 2215<br>4030                                         | 2560<br>4665          | 2900<br>5280 |              |              |                       |              |               |  |  |  |  |
| LT 255/65 R 17 | D          | 114/110 S  | <b>7½J</b> , 8J, 8½J, 9J                                     | 276        | 784             | 260                             |  | 2335                                        | 114<br>110 | S<br>D                           | 1470<br>2645                                         | 1705<br>3065          | 1930<br>3465 | 2145<br>3855 | 2360<br>4240 |                       |              |               |  |  |  |  |
| LT 265/65 R 17 | E          | 120/117 S  | <b>8J</b> , 8½J, 9J, 9½J                                     | 288        | 796             | 272                             |  | 2370                                        | 120<br>117 | S<br>D                           | 1490<br>2735                                         | 1720<br>3160          | 1950<br>3580 | 2170<br>3980 | 2380<br>4375 | 2590<br>4760          | 2800<br>5140 |               |  |  |  |  |
| LT 285/65 R 17 | E          | 121/118 S  | <b>8½J</b> , 9J, 9½J, 10J                                    | 310        | 824             | 292                             |  | 2450                                        | 121<br>118 | S<br>D                           | 1540<br>2805                                         | 1785<br>3250          | 2020<br>3675 | 2245<br>4090 | 2465<br>4495 | 2685<br>4890          | 2900<br>5280 |               |  |  |  |  |
| 18 inch        |            |            |                                                              |            |                 |                                 |  |                                             |            |                                  |                                                      |                       |              |              |              |                       |              |               |  |  |  |  |
| LT 265/70 R 18 | C          | 113/110 S  | 7J, 7½J, <b>8J</b> , 8½J, 9J                                 | 288        | 843             | 272                             |  | 2530                                        | 113<br>110 | S<br>D                           | 1755<br>3235                                         | 2030<br>3745          | 2300<br>4240 |              |              |                       |              |               |  |  |  |  |
| LT 275/70 R 18 | E          | 125/122 Q  | 7J, 7½J, <b>8J</b> , 8½J, 9J                                 | 296        | 865             | 279                             |  | 2570                                        | 125<br>122 | S<br>D                           | 1755<br>3190                                         | 2030<br>3690          | 2295<br>4175 | 2555<br>4650 | 2810<br>5110 | 3055<br>5555          | 3300<br>6000 |               |  |  |  |  |
| LT 265/65 R 18 | D          | 117/114 Q  | <b>8J</b> , 8½J, 9J, 9½J                                     | 288        | 821             | 272                             |  |                                             | 117<br>114 | S<br>D                           | 1605<br>2945                                         | 1855<br>3410          | 2100<br>3860 | 2335<br>4295 | 2570<br>4720 |                       |              |               |  |  |  |  |

| Tyre           |            |            | Tyre dimensions                                              |            |              |                                 |  | Rolling circum-<br>ference <sup>3)</sup> | Load Index | Wheel<br>position <sup>10)</sup> | Load capacity (kg) per axle at a tyre pressure (bar) |                       |              |              |              |                       |              |            |  |  |  |  |
|----------------|------------|------------|--------------------------------------------------------------|------------|--------------|---------------------------------|--|------------------------------------------|------------|----------------------------------|------------------------------------------------------|-----------------------|--------------|--------------|--------------|-----------------------|--------------|------------|--|--|--|--|
| Size           | Load Range | Load Index | Max. standard<br>value in operation <sup>2)</sup>            |            |              | New tyre on<br>measuring<br>rim |  |                                          |            |                                  | 2.5                                                  | <sup>11)</sup><br>3.0 | 3.5          | 4.0          | 4.5          | <sup>12)</sup><br>5.0 | 5.5          |            |  |  |  |  |
|                |            |            | Permitted Rim width <sup>1) 7)</sup><br>(measuring rim bold) | Width (mm) | Outer-Ø (mm) |                                 |  |                                          |            |                                  |                                                      |                       |              |              |              |                       |              | Width (mm) |  |  |  |  |
| LT sizes       |            |            |                                                              |            |              |                                 |  |                                          |            |                                  |                                                      |                       |              |              |              |                       |              |            |  |  |  |  |
| 18 inch        |            |            |                                                              |            |              |                                 |  |                                          |            |                                  |                                                      |                       |              |              |              |                       |              |            |  |  |  |  |
| LT 275/65 R 18 | E          | 123/120 S  | <b>8J</b> , 8½J, 9J, 9½J                                     | 296        | 835          | 279                             |  | 2490                                     | 123<br>120 | S<br>D                           | 1645<br>2980                                         | 1905<br>3445          | 2155<br>3900 | 2400<br>4340 | 2640<br>4765 | 2870<br>5185          | 3100<br>5600 |            |  |  |  |  |
| LT 255/60 R 18 | D          | 112/109 S  | <b>7½J</b> , 8J, 8½J, 9J                                     | 276        | 781          | 260                             |  | 2330                                     | 112<br>109 | S<br>D                           | 1395<br>2570                                         | 1615<br>2975          | 1830<br>3365 | 2035<br>3745 | 2240<br>4120 |                       |              |            |  |  |  |  |
| LT 265/60 R 18 | E          | 119/116 S  | <b>8J</b> , 8½J, 9J, 9½J                                     | 288        | 793          | 272                             |  | 2365                                     | 119<br>116 | S<br>D                           | 1445<br>2660                                         | 1670<br>3075          | 1890<br>3480 | 2105<br>3875 | 2315<br>4255 | 2520<br>4630          | 2720<br>5000 |            |  |  |  |  |
| LT 285/60 R 18 | D          | 118/115 S  | <b>8½J</b> , 9J, 9½J, 10J                                    | 310        | 819          | 292                             |  | 2440                                     | 118<br>115 | S<br>D                           | 1645<br>3035                                         | 1905<br>3510          | 2155<br>3970 | 2400<br>4420 | 2640<br>4860 |                       |              |            |  |  |  |  |
| 20 inch        |            |            |                                                              |            |              |                                 |  |                                          |            |                                  |                                                      |                       |              |              |              |                       |              |            |  |  |  |  |
| LT 305/55 R 20 | E          | 121/118 Q  | <b>9J</b> , <b>9½J</b> , 10J, 10½J, 11J                      | 335        | 864          | 316                             |  | 2575                                     | 121<br>118 | S<br>D                           | 1810<br>3295                                         | 2095<br>3815          | 2370<br>4315 | 2635<br>4805 | 2900<br>5280 |                       |              |            |  |  |  |  |

| LT flotation-sizes ***) |   |       |                              |     |     |     |  |      |     |   |      | 1.7  | 2.1  | 2.4  | 2.8  | 3.1  | 3.4  | 3.8  | 4.1  | 4.5 |
|-------------------------|---|-------|------------------------------|-----|-----|-----|--|------|-----|---|------|------|------|------|------|------|------|------|------|-----|
| 15 inch                 |   |       |                              |     |     |     |  |      |     |   |      |      |      |      |      |      |      |      |      |     |
| 30 X 9.50 R 15 LT       | C | 104 Q | 6J, 6½J, 7J, 7½J, 8J         | 260 | 771 | 240 |  | 2290 | 104 | S | 1010 | 1195 | 1330 | 1505 | 1630 | 1755 |      |      |      |     |
| 31 X 10.50 R 15 LT      | C | 109 R | 7J, 7½J, 8J, 8½J, 9J         | 289 | 797 | 268 |  | 2365 | 109 | S | 1155 | 1365 | 1520 | 1720 | 1865 | 2010 |      |      |      |     |
| 33 X 10.50 R 15 LT      | C | 114 Q | 7J, 7½J, 8J, 8½J, 9J         | 289 | 850 | 268 |  | 2520 | 114 | S | 1320 | 1565 | 1745 | 1970 | 2140 | 2305 |      |      |      |     |
| 33 X 12.50 R 15 LT      | C | 108 Q | 8J, 8½J, 9J, 9½J, 10J, 10½J  | 343 | 850 | 318 |  | 2520 | 108 | S | 1465 | 1735 | 1935 |      |      |      |      |      |      |     |
| 35 X 12.50 R 15 LT      | C | 113 Q | 8J, 8½J, 9J, 9½J, 10J, 10½J  | 343 | 903 | 318 |  | 2675 | 113 | S | 1685 | 2000 | 2225 |      |      |      |      |      |      |     |
| 17 inch                 |   |       |                              |     |     |     |  |      |     |   |      |      |      |      |      |      |      |      |      |     |
| 33 X 12.50 R 17 LT      | D | 114 Q | 8½J, 9J, 9½J, 10J, 10½J, 11J | 343 | 848 | 318 |  | 2520 | 114 | S | 1320 | 1565 | 1745 | 1970 | 2140 | 2305 |      |      |      |     |
| 35 X 12.50 R 17 LT      | E | 121 Q | 8J, 8½J, 9J, 9½J, 10J, 10½J  | 343 | 901 | 318 |  | 2675 | 121 | S | 1330 | 1575 | 1750 | 1980 | 2150 | 2315 | 2530 | 2690 | 2900 |     |
| 37 X 12.50 R 17 LT      | C | 116 Q | 8J, 8½J, 9J, 9½J, 10J, 10½J  | 343 | 954 | 318 |  | 2830 | 116 | S | 1835 | 2170 | 2415 |      |      |      |      |      |      |     |
| 18 inch                 |   |       |                              |     |     |     |  |      |     |   |      |      |      |      |      |      |      |      |      |     |
| 33 X 12.50 R 18 LT      | E | 118 Q | 8½J, 9J, 9½J, 10J, 10½J, 11J | 343 | 847 | 318 |  | 2520 | 118 | S | 1210 | 1430 | 1595 | 1805 | 1955 | 2105 | 2305 | 2450 | 2640 |     |
| 20 inch                 |   |       |                              |     |     |     |  |      |     |   |      |      |      |      |      |      |      |      |      |     |
| 33 X 12.50 R 20 LT      | E | 114 Q | 8½J, 9J, 9½J, 10J, 10½J, 11J | 343 | 845 | 318 |  | 2520 | 114 | S | 1080 | 1280 | 1425 | 1610 | 1750 | 1885 | 2060 | 2190 | 2360 |     |
| 35 X 12.50 R 20 LT      | E | 121 Q | 8½J, 9J, 9½J, 10J, 10½J, 11J | 343 | 898 | 318 |  | 2675 | 121 | S | 1330 | 1575 | 1750 | 1980 | 2150 | 2315 | 2530 | 2690 | 2900 |     |

\*\*) Load Range, standardized according to TRA (Tyre and Rim Association, USA). Classifies the max. load capacity of a tyre, corresponding PR. LR B equals 4 PR, LR C - 6 PR, LR D - 8 PR, LR E - 10 PR.

\*\*) for explanation of size designations see page 9, graph at the top (centre)

Tyre Databook 2025 / Car · 4x4 · Van

The tyre data specified above are standard values acc. to TRA.

See cover foldout for footnotes



## sContact

### Spare tyres

The space- and weight-saving spare tyre in radial design for temporary, limited use. Approved for speeds of up to 80 km/h / 50 mph <sup>\*)</sup>  
This tyre may only be used in an emergency on one wheel of the vehicle with the agreement of the vehicle manufacturer. The T in the tyre designation indicates temporary use under restricted conditions.

<sup>\*)</sup> According to UN-Regulation 64 governing the use of special spare tyres, those with a higher speed rating may also only be used up to a maximum speed of 80 km/h / 50 mph.

### Technical data Special spare tyres for temporary use

| Size          | Tyre                 |                          | Permitted rims <sup>1) 7)</sup><br><br>(measuring rim bold) | Tyre dimensions<br>Max. standard value in operation <sup>2)</sup> |              | Radius <sup>3a)</sup><br><br>stat. (mm) | Rolling circumference <sup>3)</sup><br><br>(mm) |
|---------------|----------------------|--------------------------|-------------------------------------------------------------|-------------------------------------------------------------------|--------------|-----------------------------------------|-------------------------------------------------|
|               | Load Index<br><br>LI | Load capacity*<br><br>kg |                                                             | Width (mm)                                                        | Outer-Ø (mm) |                                         |                                                 |
| 95 series     |                      |                          |                                                             |                                                                   |              |                                         |                                                 |
| T 115/95 R 17 | 95                   | 690                      | 3J                                                          | 118                                                               | 658          | 301                                     | 1985                                            |
|               |                      |                          | 3½J                                                         | 123                                                               |              |                                         |                                                 |
|               |                      |                          | 4J                                                          | 128                                                               |              |                                         |                                                 |
| 90 series     |                      |                          |                                                             |                                                                   |              |                                         |                                                 |
| T 115/90 R 16 | 92                   | 630                      | 3J                                                          | 118                                                               | 622          | 284                                     | 1875                                            |
|               |                      |                          | 3½J                                                         | 123                                                               |              |                                         |                                                 |
|               |                      |                          | 4J                                                          | 128                                                               |              |                                         |                                                 |
| T 125/90 R 16 | 98                   | 750                      | 3J                                                          | 126                                                               |              |                                         |                                                 |
|               |                      |                          | 3½J                                                         | 131                                                               | 642          | 291                                     | 1930                                            |
|               |                      |                          | 4J                                                          | 136                                                               |              |                                         |                                                 |
| T 135/90 R 16 | 102                  | 850                      | 3½J                                                         | 138                                                               | 660          | 298                                     | 1985                                            |
|               |                      |                          | 4J                                                          | 143                                                               |              |                                         |                                                 |
|               |                      |                          | 4½J                                                         | 148                                                               |              |                                         |                                                 |

<sup>\*)</sup> Load capacity at **4.2 bar** up to max. 130 km/h. Application-specific speed limited to **80 km/h (50 mph)** in accordance with UN regulation 64.

| Size          | Tyre       |                | Permitted rims <sup>1) 7)</sup><br><br>(measuring rim bold) | Tyre dimensions<br>Max. standard value in operation <sup>2)</sup> |              | Radius <sup>3a)</sup><br><br>stat. (mm) | Rolling circumference<br><br>(mm) |
|---------------|------------|----------------|-------------------------------------------------------------|-------------------------------------------------------------------|--------------|-----------------------------------------|-----------------------------------|
|               | Load Index | Load capacity* |                                                             | Width (mm)                                                        | Outer-Ø (mm) |                                         |                                   |
|               | LI         | kg             |                                                             |                                                                   |              |                                         |                                   |
| 90 series     |            |                |                                                             |                                                                   |              |                                         |                                   |
| T 145/90 R 16 | 106        | 950            | 3½J                                                         | 146                                                               |              |                                         |                                   |
|               |            |                | <b>4J</b>                                                   | <b>151</b>                                                        | <b>678</b>   | <b>305</b>                              | <b>2035</b>                       |
|               |            |                | 4½J                                                         | 156                                                               |              |                                         |                                   |
|               |            |                | 5J                                                          | 161                                                               |              |                                         |                                   |
| T 135/90 R 17 | 104        | 900            | <b>3½J</b>                                                  | <b>138</b>                                                        | <b>686</b>   | <b>311</b>                              | <b>2060</b>                       |
|               |            |                | 4J                                                          | 143                                                               |              |                                         |                                   |
|               |            |                | 4½J                                                         | 148                                                               |              |                                         |                                   |
| T 155/90 R 18 | 113        | 1150           | 4J                                                          | 158                                                               |              |                                         |                                   |
|               |            |                | <b>4½J</b>                                                  | <b>163</b>                                                        | <b>749</b>   | <b>338</b>                              | <b>2250</b>                       |
|               |            |                | 5J                                                          | 168                                                               |              |                                         |                                   |
| 85 series     |            |                |                                                             |                                                                   |              |                                         |                                   |
| T 125/85 R 16 | 99         | 775            | 3J                                                          | 126                                                               |              |                                         |                                   |
|               |            |                | <b>3½J</b>                                                  | <b>131</b>                                                        | <b>626</b>   | <b>286</b>                              | <b>1885</b>                       |
|               |            |                | 4J                                                          | 136                                                               |              |                                         |                                   |
| T 145/85 R 18 | 103        | 875            | 3½J                                                         | 146                                                               |              |                                         |                                   |
|               |            |                | <b>4J</b>                                                   | <b>151</b>                                                        | <b>713</b>   | <b>324</b>                              | <b>2145</b>                       |
|               |            |                | 4½J                                                         | 156                                                               |              |                                         |                                   |
|               |            |                | 5J                                                          | 161                                                               |              |                                         |                                   |
| T 155/85 R 18 | 115        | 1215           | 4J                                                          | 158                                                               |              |                                         |                                   |
|               |            |                | <b>4½J</b>                                                  | <b>163</b>                                                        | <b>731</b>   | <b>331</b>                              | <b>2200</b>                       |
|               |            |                | 5J                                                          | 168                                                               |              |                                         |                                   |
| 80 series     |            |                |                                                             |                                                                   |              |                                         |                                   |
| T 125/80 R 15 | 95         | 690            | 3J                                                          | 126                                                               |              |                                         |                                   |
|               |            |                | <b>3½J</b>                                                  | <b>131</b>                                                        | <b>589</b>   | <b>269</b>                              | <b>1770</b>                       |
|               |            |                | 4J                                                          | 136                                                               |              |                                         |                                   |
| T 125/80 R 16 | 97         | 730            | 3J                                                          | 126                                                               |              |                                         |                                   |
|               |            |                | <b>3½J</b>                                                  | <b>131</b>                                                        | <b>614</b>   | <b>281</b>                              | <b>1850</b>                       |
|               |            |                | 4J                                                          | 136                                                               |              |                                         |                                   |

<sup>\*)</sup> Load capacity at **4.2 bar** up to max. 130 km/h. Application-specific speed limited to **80 km/h (50 mph)** in accordance with UN regulation 64.

| Size          | Tyre          |                   | Permitted<br>rims <sup>1) 7)</sup><br><br>(measuring<br>rim bold) | Tyre dimensions<br>Max. standard<br>value in operation <sup>2)</sup> |                 | Radius <sup>3a)</sup><br><br>stat.<br>(mm) | Rolling<br>circumference <sup>3)</sup><br><br>(mm) |
|---------------|---------------|-------------------|-------------------------------------------------------------------|----------------------------------------------------------------------|-----------------|--------------------------------------------|----------------------------------------------------|
|               | Load<br>Index | Load<br>capacity* |                                                                   | Width<br>(mm)                                                        | Outer-Ø<br>(mm) |                                            |                                                    |
|               | LI            | kg                |                                                                   |                                                                      |                 |                                            |                                                    |
| 80 series     |               |                   |                                                                   |                                                                      |                 |                                            |                                                    |
| T 125/80 R 17 | 99            | 775               | 3J                                                                | 126                                                                  |                 |                                            |                                                    |
|               |               |                   | 3½J                                                               | 131                                                                  | 640             | 294                                        | 1930                                               |
|               |               |                   | 4J                                                                | 136                                                                  |                 |                                            |                                                    |
| T 135/80 R 17 | 102           | 850               | 3½J                                                               | 138                                                                  | 656             | 300                                        | 1975                                               |
| T 135/80 R 17 | 103           | 875               | 4J                                                                | 143                                                                  |                 |                                            |                                                    |
|               |               |                   | 4½J                                                               | 148                                                                  |                 |                                            |                                                    |
| T 165/80 R 17 | 104           | 900               | 4J                                                                | 167                                                                  |                 |                                            |                                                    |
|               |               |                   | 4½J                                                               | 172                                                                  | 706             | 319                                        | 2125                                               |
|               |               |                   | 5J                                                                | 177                                                                  |                 |                                            |                                                    |
|               |               |                   | 5½J                                                               | 182                                                                  |                 |                                            |                                                    |
| T 135/80 R 18 | 104           | 900               | 3½J                                                               | 138                                                                  | 681             | 313                                        | 2055                                               |
|               |               |                   | 4J                                                                | 143                                                                  |                 |                                            |                                                    |
|               |               |                   | 4½J                                                               | 148                                                                  |                 |                                            |                                                    |
| T 145/80 R 18 | 99            | 775               | 3½J                                                               | 146                                                                  |                 |                                            |                                                    |
|               |               |                   | 4J                                                                | 151                                                                  | 699             | 319                                        | 2100                                               |
|               |               |                   | 4½J                                                               | 156                                                                  |                 |                                            |                                                    |
|               |               |                   | 5J                                                                | 161                                                                  |                 |                                            |                                                    |
| T 145/80 R 19 | 110           | 1060              | 3½J                                                               | 146                                                                  |                 |                                            |                                                    |
|               |               |                   | 4J                                                                | 151                                                                  | 725             | 332                                        | 2180                                               |
|               |               |                   | 4½J                                                               | 156                                                                  |                 |                                            |                                                    |
|               |               |                   | 5J                                                                | 161                                                                  |                 |                                            |                                                    |
| T 155/80 R 19 | 114           | 1180              | 4J                                                                | 158                                                                  |                 |                                            |                                                    |
|               |               |                   | 4½J                                                               | 163                                                                  | 741             | 338                                        | 2230                                               |
|               |               |                   | 5J                                                                | 168                                                                  |                 |                                            |                                                    |
| T 175/80 R 19 | 122           | 1500              | 4½J                                                               | 179                                                                  |                 |                                            |                                                    |
|               |               |                   | 5J                                                                | 184                                                                  | 775             | 351                                        | 2325                                               |
|               |               |                   | 5½J                                                               | 189                                                                  |                 |                                            |                                                    |
|               |               |                   | 6J                                                                | 194                                                                  |                 |                                            |                                                    |
| 70 series     |               |                   |                                                                   |                                                                      |                 |                                            |                                                    |
| T 115/70 R 15 | 90            | 600               | 3J                                                                | 118                                                                  |                 |                                            |                                                    |
|               |               |                   | 3½J                                                               | 123                                                                  | 549             | 254                                        | 1655                                               |
|               |               |                   | 4J                                                                | 128                                                                  |                 |                                            |                                                    |
| T 125/70 R 15 | 95            | 690               | 3J                                                                | 126                                                                  |                 |                                            |                                                    |
|               |               |                   | 3½J                                                               | 131                                                                  | 565             | 259                                        | 1700                                               |
|               |               |                   | 4J                                                                | 136                                                                  |                 |                                            |                                                    |

\*) Load capacity at **4.2 bar** up to max. 130 km/h. Application-specific speed limited to **80 km/h (50 mph)** in accordance with UN regulation 64.

| Size          | Tyre       |                | Permitted rims <sup>1) 7)</sup><br><br>(measuring rim bold) | Tyre dimensions<br>Max. standard value in operation <sup>2)</sup> |              | Radius <sup>3a)</sup> | Rolling circumference |
|---------------|------------|----------------|-------------------------------------------------------------|-------------------------------------------------------------------|--------------|-----------------------|-----------------------|
|               | Load Index | Load capacity* |                                                             | Width (mm)                                                        | Outer-Ø (mm) | stat. (mm)            | (mm)                  |
|               | LI         | kg             |                                                             |                                                                   |              |                       |                       |
| 70 series     |            |                |                                                             |                                                                   |              |                       |                       |
| T 115/70 R 16 | 92         | 630            | 3J                                                          | 118                                                               |              |                       |                       |
|               |            |                | 3½J                                                         | 123                                                               | 574          | 266                   | 1730                  |
|               |            |                | 4J                                                          | 128                                                               |              |                       |                       |
| T 125/70 R 16 | 96         | 710            | 3J                                                          | 126                                                               |              |                       |                       |
|               |            |                | 3½J                                                         | 131                                                               | 590          | 272                   | 1775                  |
|               |            |                | 4J                                                          | 136                                                               |              |                       |                       |
| T 135/70 R 16 | 100        | 800            | 3½J                                                         | 139                                                               |              |                       |                       |
|               |            |                | 4J                                                          | 144                                                               | 604          | 277                   | 1820                  |
|               |            |                | 4½J                                                         | 149                                                               |              |                       |                       |
| T 125/70 R 17 | 98         | 750            | 3J                                                          | 126                                                               |              |                       |                       |
|               |            |                | 3½J                                                         | 131                                                               | 616          | 285                   | 1855                  |
|               |            |                | 4J                                                          | 136                                                               |              |                       |                       |
| T 155/70 R 17 | 110        | 1060           | 4J                                                          | 158                                                               |              |                       |                       |
|               |            |                | 4½J                                                         | 163                                                               | 658          | 301                   | 1985                  |
|               |            |                | 5J                                                          | 168                                                               |              |                       |                       |
| T 125/70 R 18 | 99         | 775            | 3J                                                          | 126                                                               |              |                       |                       |
|               |            |                | 3½J                                                         | 131                                                               | 641          | 297                   | 1930                  |
|               |            |                | 4J                                                          | 136                                                               |              |                       |                       |
| T 125/70 R 19 | 100        | 800            | 3J                                                          | 126                                                               |              |                       |                       |
|               |            |                | 3½J                                                         | 131                                                               | 667          | 310                   | 2010                  |
|               |            |                | 4J                                                          | 136                                                               |              |                       |                       |
| 65 series     |            |                |                                                             |                                                                   |              |                       |                       |
| T 145/65 R 20 | 105        | 925            | 4J                                                          | 151                                                               |              |                       |                       |
|               |            |                | 4½J                                                         | 156                                                               | 704          | 327                   | 2125                  |
|               |            |                | 5J                                                          | 161                                                               |              |                       |                       |
| 60 series     |            |                |                                                             |                                                                   |              |                       |                       |
| T 125/60 R 18 | 94         | 670            | 3½J                                                         | 131                                                               | 613          | 287                   | 1850                  |
|               |            |                | 4J                                                          | 136                                                               |              |                       |                       |
|               |            |                | 4½J                                                         | 141                                                               |              |                       |                       |
| T 145/60 R 20 | 105        | 925            | 4J                                                          | 151                                                               |              |                       |                       |
|               |            |                | 4½J                                                         | 156                                                               | 688          | 322                   | 2080                  |
|               |            |                | 5J                                                          | 161                                                               |              |                       |                       |

\*) Load capacity at **4.2 bar** up to max. 130 km/h. Application-specific speed limited to **80 km/h (50 mph)** in accordance with UN regulation 64.

## The ContiMobilityKit for extended movability.

The ContiMobilityKit is a convenient repair kit, designed to seal punctures in the tyre tread caused by nails or similar objects with a diameter of up to 6 mm. The kit consists of a compact compressor and a separate sealant bottle and has a shelf life of up to 5 years.

In case of a puncture, an emergency roadside tyre change is not necessary and the journey can be continued for another 200 km (125 miles) at a maximum speed of 80 km/h (50 mph). It's not even necessary to remove and replace the valve core - after just a few steps you are ready to go again.

The ContiMobilityKit is only suitable for passenger car tyres with a mandatory maximum tyre pressure of 3 bar.

Easy-to-use repair kit for sealing and reinflating a punctured tyre

- › Ensuring an unaltered driving performance for another 200 km (125 miles) at a maximum speed of 80 km/h (50 mph)
- › Original equipment quality 'Engineered in Germany'

### Product contents:

- › Compressor
- › Pressure-resistant tyre sealant bottle
- › User manual
- › Bag
- › Gloves



### Technical specifications of compressor:

| Amperage                            | Voltage | Maximum pressure         |
|-------------------------------------|---------|--------------------------|
| Max. 10 A according to DIN ISO 8820 | 12 V    | 700 kPa (7 bar, 102 psi) |
| Dimensions (mm)                     | Weight  | Area of application      |
| 150 x 130 x 60                      | 650 g   | -30 °C up to +60 °C      |

### Technical specifications of sealant bottle:

| Sealant amount | Shelf life              | Dimensions (mm) |
|----------------|-------------------------|-----------------|
| 450 ml         | 5 years                 | Ø 87 x 125      |
| Weight         | Application temperature |                 |
| 585 g          | - 30°C up to + 60°C     |                 |

### Spare parts for the ContiMobilityKit: the tyre sealant.

The tyre sealant is pumped by the Continental compressor into the tyre, enabling the onward journey to the nearest garage or tyre service (max. 80 km/h / 50 mph and max. 200 km / 125 miles). It seals car tyre punctures caused by nails or similar objects with a diameter of up to 6 mm.

- › Extended shelf life of up to five years
- › No need to remove and replace valve core

### Product contents

- › Pressure-resistant 450 ml tyre sealant bottle

### Technical specifications of sealant bottle:

| Sealant amount | Shelf life              | Dimensions (mm) |
|----------------|-------------------------|-----------------|
| 450 ml         | 5 years                 | Ø 87 x 125      |
| Weight         | Application temperature |                 |
| 585 g          | - 30°C up to + 60°C     |                 |



### Spare parts for the ContiMobilityKit: the exchange hose.

After usage of the ContiMobilityKit, the hose needs to be replaced due to residue of sealant in the hose.

### Product contents:

- › 50 cm hose including bottle connection for the ContiMobilityKit sealant bottle
- › Exchange manual
- › Plastic gloves
- › Speed warning label
- › Small plastic bag with screws

### Technical specifications of exchange hose:

| Hose length |
|-------------|
| 50 cm       |



Suitable for many passenger car tyres. For a detailed list of tyre sizes see [www.continental-mobility.com](http://www.continental-mobility.com)



exemplary illustration

1

**CP - Camping Pneu**

P tyres have been developed for camping vehicles such as mobile homes and are fitted with a reinforced sub structure. Equivalent to C tyres in terms of construction, CP tyres therefore have a high load bearing capacity. Due to considerably higher air pressure, **CP tyres have higher load bearing capacity** and at the same time, greater protection from mechanical damage.

2

**Service description****109 Load Index**

max. axle load in single fitment (2060 kg)

**R Speed symbol**

max. speed (170 km/h)

**Additional information**

Twin fitment is allowed:

1.85 times of the load capacity of the single tyre.

CP standard:

**Increased maximum tyre pressure permitted compared to standard Commercial tyres.**

## Transporter and Van tyres

### VanContact Ultra

For transporters and vans

- › Benefit from superb durability and high sidewall robustness.
- › Experience low rolling resistance due to a special compound concept tailor-made for vans.
- › Enjoy excellent mileage enabled by its closed pattern design.
- › Symmetric tread pattern.

#### Tyre dimensions

|                    |                   |
|--------------------|-------------------|
| Tyre width in mm   | 185-235           |
| Rim size in inches | 14-17             |
| Speed Symbol       | Q / R / S / T / H |
| Tyre cross-section | series 55-82      |
| Load Index         | 99-121            |

B-C A B / 71 dB



### VanContact Eco

For transporters and vans

- › Maximum fuel efficiency.
- › Enhanced mileage.
- › Noise- and comfort-optimised performance.
- › Symmetric tread pattern.

#### Tyre dimensions

|                    |               |
|--------------------|---------------|
| Tyre width in mm   | 185-235       |
| Rim size in inches | 15-17         |
| Speed Symbol       | R / S / T / H |
| Tyre cross-section | series 60-75  |
| Load Index         | 100-121       |

A-B A B / 70-72 dB



### ContiVanContact 100

For transporters and vans

- › High level of efficiency thanks to higher mileage.
- › Improved durability on all roads and thus longer service life.
- › High safety reserves for heavy loads.
- › Symmetric tread pattern.

#### Tyre dimensions

|                    |                   |
|--------------------|-------------------|
| Tyre width in mm   | 165-285           |
| Rim size in inches | 14-17             |
| Speed Symbol       | Q / R / S / T / H |
| Tyre cross-section | series 60-82      |
| Load Index         | 89-131            |

B-D A-C B / 71-72 dB



### ContiVanContact 200

For transporters and vans

- › Safe journey thanks to shorter braking distances on wet roads.
- › Considerably reduced rolling resistance for lower fuel consumption and greater efficiency.
- › Safe handling in all situations, even under heavy loads.
- › Symmetric tread pattern.

#### Tyre dimensions

|                    |               |
|--------------------|---------------|
| Tyre width in mm   | 195-235       |
| Rim size in inches | 15-17         |
| Speed Symbol       | R / T / H / V |
| Tyre cross-section | series 55-75  |
| Load Index         | 95-121        |

B A-B B / 72 dB



## Transporter and Van tyres

### VanContact Winter

For transporters and vans

- › Shorter braking distances and improved traction on snow.
- › High aquaplaning safety and shorter braking distances on wet roads.
- › Improved rolling resistance.
- › Directional tread pattern.



**M+S**

| Tyre dimensions    |                   |
|--------------------|-------------------|
| Tyre width in mm   | 165-285           |
| Rim size in inches | 14-17             |
| Speed Symbol       | Q / R / S / T / H |
| Tyre cross-section | series 55-82      |
| Load Index         | 89-131            |

C-E A-B B / 73 dB



### VanContact A/S Ultra

For transporters and vans

- › Benefit from superb durability and high sidewall robustness.
- › Experience outstanding grip on snow with our intelligent snow catchers and smart 3D sipes.
- › Enjoy the low rolling resistance and high mileage enabled by its functionalized polymers.
- › Directional tread pattern.



**M+S**

| Tyre dimensions    |                   |
|--------------------|-------------------|
| Tyre width in mm   | 195-235           |
| Rim size in inches | 15-17             |
| Speed Symbol       | Q / R / S / T / H |
| Tyre cross-section | series 55-75      |
| Load Index         | 98-121            |

B-C B-C B / 73 dB

#### M+S

'Snow tyre' means a tyre whose tread pattern, tread compound or structure is primarily designed to perform better in snow conditions than a normal tyre with regard to its ability to initiate or maintain vehicle motion.

### VanContact 4Season

For transporters and vans

- › All-year efficiency due to reduced fuel consumption.
- › High braking performance on wet, muddy and snowy roads.
- › Excellent handling and braking on dry roads.
- › Symmetric tread pattern.



**M+S**

| Tyre dimensions    |                       |
|--------------------|-----------------------|
| Tyre width in mm   | 185-285               |
| Rim size in inches | 14-17                 |
| Speed Symbol       | N / Q / R / S / T / H |
| Tyre cross-section | series 55-82          |
| Load Index         | 99-126                |

B-D A-B B / 71-73 dB



### VanContact Camper

For campers and mobile homes

- › A robust construction boosts safety during temporarily increased loads according to CP standards.
- › Excellent handling and braking on dry roads.
- › High braking performance on wet, muddy and snowy roads.
- › Symmetric tread pattern.



**M+S**

| Tyre dimensions    |              |
|--------------------|--------------|
| Tyre width in mm   | 215-255      |
| Rim size in inches | 15-18        |
| Speed Symbol       | R            |
| Tyre cross-section | series 55-75 |
| Load Index         | 109-120      |

C A B / 73 dB



The Alpine symbol identifies winter tyres according to UN regulations. The snow performance of these winter tyres has to be proven by objective tests and meet or exceed defined limits. These tyres provide high performance with regards to safety and control on snow and in general on winter road conditions.

| Size          | Tyre |                     | Permitted Rim width<br><br>in inch<br>(measuring rim bold) | Tyre dimensions in mm    |                          |       |         | New tyre                 |      |  | Radius <sup>3a)</sup><br><br>stat.<br>(mm) | Rolling circum-<br>ference <sup>3b)</sup><br><br>(mm) |   |                  |             |                      | Load capacity (kg) per axle at a tyre pressure (bar) |                      |                      |                      |                      |                      |                      |      |      |                     |     |  |  |  |
|---------------|------|---------------------|------------------------------------------------------------|--------------------------|--------------------------|-------|---------|--------------------------|------|--|--------------------------------------------|-------------------------------------------------------|---|------------------|-------------|----------------------|------------------------------------------------------|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|------|------|---------------------|-----|--|--|--|
|               | PR   | LI/SI <sup>6)</sup> |                                                            | Width                    | Outer-Ø                  | Width | Outer-Ø | 3.0 <sup>11)</sup>       | 3.25 |  |                                            |                                                       |   |                  |             |                      | 3.5                                                  | 3.75                 | 4.0                  | 4.25                 | 4.5                  | 4.75 <sup>12)</sup>  | 5.0                  | 5.25 | 5.5  | 5.75 <sup>13)</sup> | 6.0 |  |  |  |
| 13 inch       |      |                     |                                                            |                          |                          |       |         |                          |      |  |                                            |                                                       |   |                  |             |                      |                                                      |                      |                      |                      |                      |                      |                      |      |      |                     |     |  |  |  |
| 165/70 R 13 C | 6    | 88/86 R             | 4½J<br>5J                                                  | 172<br>177               | 172<br>177               | 572   | 576     | 165<br>170               | 562  |  | 258                                        | 1705                                                  | 6 | 88<br>86         | S<br>T      | 935<br>1770          | 995<br>1890                                          | 1055<br>2005         | 1120<br>2120         |                      |                      |                      |                      |      |      |                     |     |  |  |  |
| 14 inch       |      |                     |                                                            |                          |                          |       |         |                          |      |  |                                            |                                                       |   |                  |             |                      |                                                      |                      |                      |                      |                      |                      |                      |      |      |                     |     |  |  |  |
| 175 R 14 C    | 8    | 99/98 Q             | 4½J<br>5J<br>5½J                                           | 180<br>185<br>190        | 180<br>185<br>190        | 646   | 650     | 173<br>178<br>183        | 634  |  | 289                                        | 1920                                                  | 8 | 99<br>98         | S<br>T      | 1120<br>2165         | 1190<br>2310                                         | 1265<br>2450         | 1335<br>2590         | 1410<br>2730         | 1480<br>2865         | 1550<br>3000         |                      |      |      |                     |     |  |  |  |
| 185 R 14 C    | 8    | 102/100 Q           | 5J<br>5½J                                                  | 191<br>196               | 191<br>196               | 662   | 668     | 183<br>188               | 650  |  | 296                                        | 1970                                                  | 8 | 102<br>100       | S<br>T      | 1225<br>2310         | 1310<br>2465                                         | 1390<br>2615         | 1465<br>2765         | 1545<br>2910         | 1620<br>3055         | 1700<br>3200         |                      |      |      |                     |     |  |  |  |
|               | 8    | 102/100 R           | 6J                                                         | 201                      | 201                      |       |         | 193<br>198               |      |  |                                            |                                                       |   |                  |             |                      |                                                      |                      |                      |                      |                      |                      |                      |      |      |                     |     |  |  |  |
| 195 R 14 C    | 8    | 106/104 Q           | 5J<br>5½J                                                  | 201<br>206               | 201<br>206               | 678   | 684     | 193<br>198               | 666  |  | 302                                        | 2020                                                  | 8 | 106<br>104       | S<br>T      | 1370<br>2600         | 1460<br>2770                                         | 1550<br>2940         | 1640<br>3110         | 1725<br>3275         | 1815<br>3435         | 1900<br>3600         |                      |      |      |                     |     |  |  |  |
|               | 8    | 106/104 R           | 6J                                                         | 211                      | 211                      |       |         | 203                      |      |  |                                            |                                                       |   |                  |             |                      |                                                      |                      |                      |                      |                      |                      |                      |      |      |                     |     |  |  |  |
|               | 8    | 106/104 S           |                                                            |                          |                          |       |         |                          |      |  |                                            |                                                       |   |                  |             |                      |                                                      |                      |                      |                      |                      |                      |                      |      |      |                     |     |  |  |  |
| 205 R 14 C    | 8    | 109/107 P           | 5½J<br>6J<br>6½J                                           | 211<br>216<br>221        | 211<br>216<br>221        | 700   | 706     | 203<br>208<br>213        | 686  |  | 310                                        | 2080                                                  | 8 | 109<br>107       | S<br>T      | 1485<br>2815         | 1585<br>3005                                         | 1680<br>3185         | 1780<br>3370         | 1870<br>3545         | 1965<br>3725         | 2060<br>3900         |                      |      |      |                     |     |  |  |  |
| 215 R 14 C    | 8    | 112/110 P           | 5½J<br>6J<br>6½J                                           | 222<br>227<br>232        | 222<br>227<br>232        | 714   | 720     | 213<br>218<br>223        | 700  |  | 316                                        | 2120                                                  | 8 | 112<br>110       | S<br>T      | 1615<br>3065         | 1725<br>3265                                         | 1830<br>3465         | 1935<br>3660         | 2035<br>3855         | 2135<br>4050         | 2240<br>4240         |                      |      |      |                     |     |  |  |  |
| 185/75 R 14 C | 8    | 102/100 Q           | 5J<br>5½J                                                  | 191<br>196               | 191<br>196               | 646   | 650     | 184<br>189               | 634  |  | 289                                        | 1920                                                  | 8 | 102<br>100       | S<br>T      | 1175<br>2215         | 1250<br>2360                                         | 1330<br>2505         | 1405<br>2645         | 1480<br>2785         | 1555<br>2925         | 1625<br>3060         | 1700<br>3200         |      |      |                     |     |  |  |  |
|               | 8    | 102/100 R           | 6J                                                         | 201                      | 201                      |       |         | 194                      |      |  |                                            |                                                       |   |                  |             |                      |                                                      |                      |                      |                      |                      |                      |                      |      |      |                     |     |  |  |  |
| 195/75 R 14 C | 8    | 106/104 Q           | 5J<br>5½J<br>6J                                            | 199<br>204<br>209        | 199<br>204<br>209        | 660   | 666     | 191<br>196<br>201        | 648  |  | 295                                        | 1965                                                  | 8 | 106<br>104       | S<br>T      | 1315<br>2490         | 1400<br>2655                                         | 1485<br>2815         | 1570<br>2975         | 1655<br>3135         | 1735<br>3290         | 1815<br>3445         | 1900<br>3600         |      |      |                     |     |  |  |  |
| 165/70 R 14 C | 6    | 89/87 R             | 4½J<br>5½J<br>5J                                           | 172<br>182<br>177        | 172<br>182<br>177        | 598   | 602     | 165<br>175<br>170        | 588  |  | 271                                        | 1780                                                  | 6 | 89<br>87         | S<br>T      | 970<br>1820          | 1030<br>1940                                         | 1095<br>2060         | 1160<br>2180         |                      |                      |                      |                      |      |      |                     |     |  |  |  |
| 175/70 R 14 C | 6    | 95/93 T             | 4½J<br>5J<br>5½J                                           | 179<br>184<br>189        | 179<br>184<br>189        | 612   | 616     | 172<br>177<br>182        | 602  |  | 276                                        | 1825                                                  | 6 | 95<br>93         | S<br>T      | 1150<br>2170         | 1230<br>2315                                         | 1305<br>2460         | 1380<br>2600         |                      |                      |                      |                      |      |      |                     |     |  |  |  |
| 195/70 R 14 C | 8    | 101/99 R<br>(104 N) | 5J<br>5½J<br>6½J<br>6J                                     | 199<br>204<br>214<br>209 | 199<br>204<br>214<br>209 | 640   | 646     | 191<br>196<br>206<br>201 | 630  |  | 288                                        | 1910                                                  | 8 | 104<br>101<br>99 | S<br>S<br>T | 1150<br>1140<br>2145 | 1225<br>1215<br>2285                                 | 1300<br>1290<br>2425 | 1375<br>1365<br>2565 | 1445<br>1435<br>2700 | 1520<br>1505<br>2835 | 1590<br>1580<br>2965 | 1660<br>1650<br>3100 | 1730 | 1800 |                     |     |  |  |  |
| 175/65 R 14 C | 6    | 90/88 T             | 5J<br>5½J                                                  | 184<br>189               | 184<br>189               | 594   | 598     | 177<br>182               | 584  |  | 269                                        | 1770                                                  | 6 | 90<br>88         | S<br>T      | 1000<br>1870         | 1070<br>1995                                         | 1135<br>2115         | 1200<br>2240         |                      |                      |                      |                      |      |      |                     |     |  |  |  |
| 15 inch       |      |                     |                                                            |                          |                          |       |         |                          |      |  |                                            |                                                       |   |                  |             |                      |                                                      |                      |                      |                      |                      |                      |                      |      |      |                     |     |  |  |  |
| 195 R 15 C    | 8    | 106/104 R           | 5J<br>5½J                                                  | 201<br>206               | 201<br>206               | 703   | 709     | 193<br>198               | 690  |  | 314                                        | 2090                                                  | 8 | 106<br>104       | S<br>T      | 1370<br>2600         | 1460<br>2770                                         | 1550<br>2940         | 1640<br>3110         | 1725<br>3275         | 1815<br>3435         | 1900<br>3600         |                      |      |      |                     |     |  |  |  |
|               | 8    | 106/104 S           | 6J                                                         | 211                      | 211                      |       |         | 203                      |      |  |                                            |                                                       |   |                  |             |                      |                                                      |                      |                      |                      |                      |                      |                      |      |      |                     |     |  |  |  |
| 195/70 R 15 C | 8    | 104/102 R           | 5J<br>5½J                                                  | 199<br>204               | 199<br>204               | 665   | 671     | 191<br>196               | 655  |  | 300                                        | 1985                                                  | 8 | 104<br>97<br>102 | S<br>S<br>T | 1300<br>1220<br>2455 | 1385<br>1300<br>2620                                 | 1470<br>1380<br>2780 | 1555<br>1460<br>2935 | 1635<br>3090         | 1715<br>3245         | 1800<br>3400         |                      |      |      |                     |     |  |  |  |
|               | 8    | 104/102 R<br>(97 T) | 6½J<br>6J                                                  | 214<br>214<br>209        | 214<br>214<br>209        |       |         | 206<br>206<br>201        |      |  |                                            |                                                       |   |                  |             |                      |                                                      |                      |                      |                      |                      |                      |                      |      |      |                     |     |  |  |  |
|               | 8    | 104/102 S           |                                                            |                          |                          |       |         |                          |      |  |                                            |                                                       |   |                  |             |                      |                                                      |                      |                      |                      |                      |                      |                      |      |      |                     |     |  |  |  |
|               | 8    | 104/102 T           |                                                            |                          |                          |       |         |                          |      |  |                                            |                                                       |   |                  |             |                      |                                                      |                      |                      |                      |                      |                      |                      |      |      |                     |     |  |  |  |

| Size           | Tyre |                          | Permitted Rim width<br><br>in inch<br>(measuring rim bold) | Tyre dimensions in mm |                   |      |       | New tyre          |         |  | Radius <sup>3a)</sup><br><br>stat.<br>(mm) | Rolling circumference <sup>3b)</sup><br><br>(mm) | PR           | LI                | Pos. <sup>10)</sup>  | Load capacity (kg) per axle at a tyre pressure (bar) |                      |                      |                      |                      |                      |                      |                      |      |      |      |                     |     |  |  |  |  |  |  |
|----------------|------|--------------------------|------------------------------------------------------------|-----------------------|-------------------|------|-------|-------------------|---------|--|--------------------------------------------|--------------------------------------------------|--------------|-------------------|----------------------|------------------------------------------------------|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|------|------|------|---------------------|-----|--|--|--|--|--|--|
|                | PR   | LI/SI <sup>6)</sup>      |                                                            | Std.                  | Spec.             | Std. | Spec. | Width             | Outer-Ø |  |                                            |                                                  |              |                   |                      | <sup>11)</sup> 3.0                                   | 3.25                 | 3.5                  | 3.75                 | 4.0                  | 4.25                 | 4.5                  | <sup>12)</sup> 4.75  | 5.0  | 5.25 | 5.5  | <sup>13)</sup> 5.75 | 6.0 |  |  |  |  |  |  |
| 15 inch        |      |                          |                                                            |                       |                   |      |       |                   |         |  |                                            |                                                  |              |                   |                      |                                                      |                      |                      |                      |                      |                      |                      |                      |      |      |      |                     |     |  |  |  |  |  |  |
| 205/70 R 15 C  | 8    | 106/104 R                | 5½J<br>6J<br>6½J                                           | 212<br>217<br>222     | 212<br>217<br>222 | 681  | 687   | 204<br>209<br>214 | 669     |  | 306                                        | 2025                                             | 8            | 106<br>104        | S<br>T               | 1370<br>2600                                         | 1460<br>2770         | 1550<br>2940         | 1640<br>3110         | 1725<br>3275         | 1815<br>3435         | 1900<br>3600         |                      |      |      |      |                     |     |  |  |  |  |  |  |
| 215/70 R 15 C  | 8    | 109/107 R                | 5½J<br>6J<br>6½J<br>7J                                     | 220                   | 220               | 695  | 701   | 211               | 683     |  | 311                                        | 2070                                             | 8            | 109<br>107        | S<br>T               | 1485<br>2815                                         | 1585<br>3005         | 1680<br>3185         | 1780<br>3370         | 1870<br>3545         | 1965<br>3725         | 2060<br>3900         |                      |      |      |      |                     |     |  |  |  |  |  |  |
|                | 8    | 109/107 S                |                                                            | 225<br>230            | 225<br>230        |      |       | 216<br>221        |         |  |                                            |                                                  | 2170         | 109               | FA S<br>RA S<br>RA T | 1425<br>1265<br>2635                                 | 1520<br>1350<br>2810 | 1610<br>1430<br>2980 | 1705<br>1515<br>3150 | 1795<br>1595<br>3320 | 1880<br>1675<br>3485 | 1970<br>1750<br>3645 | 2060<br>1830<br>3810 | 1905 | 1980 | 2060 |                     |     |  |  |  |  |  |  |
| 215/70 R 15 CP | 8    | 109 R                    |                                                            | 235                   | 235               |      |       | 226               |         |  |                                            |                                                  | 8            | 109<br>1.85 x 109 |                      |                                                      |                      |                      |                      |                      |                      |                      |                      |      |      |      |                     |     |  |  |  |  |  |  |
| 225/70 R 15 C  | 8    | 112/110 R                | 6J<br>6½J<br>7J                                            | 232                   | 232               | 709  | 715   | 223               | 697     |  | 317                                        | 2110                                             | 8            | 115<br>112<br>110 | S<br>S<br>T          | 1680<br>1615<br>3065                                 | 1790<br>1725<br>3265 | 1900<br>1830<br>3465 | 2010<br>2035<br>3660 | 2115<br>2035<br>3855 | 2220<br>2135<br>4050 | 2325<br>2240<br>4240 | 2430                 |      |      |      |                     |     |  |  |  |  |  |  |
|                | 8    | 112/110 R<br>(115 N)     |                                                            | 237                   | 237               |      |       | 228               |         |  |                                            |                                                  |              |                   |                      |                                                      |                      |                      |                      |                      |                      |                      |                      |      |      |      |                     |     |  |  |  |  |  |  |
|                | 8    | 112/110 S                |                                                            | 242                   | 242               |      |       | 233               |         |  |                                            |                                                  |              |                   |                      |                                                      |                      |                      |                      |                      |                      |                      |                      |      |      |      |                     |     |  |  |  |  |  |  |
| 195/65 R 15 C  | 6    | 98/96 T                  | 5½J<br>6½J<br>6J                                           | 204<br>214<br>209     | 204<br>214<br>209 | 645  | 651   | 196<br>206<br>201 | 635     |  | 292                                        | 1925                                             | 6            | 98<br>96          | S<br>T               | 1250<br>2375                                         | 1335<br>2530         | 1415<br>2685         | 1500<br>2840         |                      |                      |                      |                      |      |      |      |                     |     |  |  |  |  |  |  |
| 205/65 R 15 C  | 6    | 102/100 T                | 5½J<br>6J<br>6½J                                           | 212<br>217<br>222     | 212<br>217<br>222 | 657  | 663   | 204<br>209<br>214 | 647     |  | 297                                        | 1960                                             | 6            | 102<br>100        | S<br>T               | 1420<br>2675                                         | 1515<br>2850         | 1605<br>3025         | 1700<br>3200         |                      |                      |                      |                      |      |      |      |                     |     |  |  |  |  |  |  |
| 215/65 R 15 C  | 6    | 104/102 T                | 6J<br>6½J<br>7J                                            | 225<br>230<br>235     | 225<br>230<br>235 | 673  | 677   | 216<br>221<br>226 | 661     |  | 303                                        | 2005                                             | 6            | 104<br>102        | S<br>T               | 1505<br>2840                                         | 1605<br>3030         | 1700<br>3215         | 1800<br>3400         |                      |                      |                      |                      |      |      |      |                     |     |  |  |  |  |  |  |
| 185/55 R 15 C  | 6    | 90/88 T                  | 5½J<br>6J                                                  | 202<br>207            | 202<br>207        | 593  | 597   | 194<br>199        | 585     |  | 272                                        | 1775                                             | 6            | 90<br>88          | S<br>T               | 1000<br>1870                                         | 1070<br>1995         | 1135<br>2115         | 1200<br>2240         |                      |                      |                      |                      |      |      |      |                     |     |  |  |  |  |  |  |
| 16 inch        |      |                          |                                                            |                       |                   |      |       |                   |         |  |                                            |                                                  |              |                   |                      |                                                      |                      |                      |                      |                      |                      |                      |                      |      |      |      |                     |     |  |  |  |  |  |  |
| 205 R 16 C     | 8    | 110/108 T                | 5½J<br>6J<br>6½J                                           | 211<br>216<br>221     | 211<br>216<br>221 | 750  | 756   | 203<br>208<br>213 | 736     |  | 335                                        | 2230                                             | 8            | 110<br>108        | S<br>T               | 1530<br>2890                                         | 1630<br>3080         | 1730<br>3270         | 1830<br>3455         | 1925<br>3640         | 2025<br>3820         | 2120<br>4000         |                      |      |      |      |                     |     |  |  |  |  |  |  |
| 175/75 R 16 C  | 8    | 101/99 R                 | 4½J<br>5J<br>5½J                                           | 179<br>184<br>189     | 179<br>184<br>189 | 678  | 684   | 172<br>177<br>182 | 668     |  | 308                                        | 2025                                             | 8            | 101<br>99         | S<br>T               | 1140<br>2145                                         | 1215<br>2285         | 1290<br>2425         | 1365<br>2565         | 1435<br>2700         | 1505<br>2835         | 1580<br>2965         | 1650<br>3100         |      |      |      |                     |     |  |  |  |  |  |  |
| 185/75 R 16 C  | 8    | 104/102 R                | 5J<br>5½J<br>6J                                            | 191<br>196<br>201     | 191<br>196<br>201 | 696  | 700   | 184<br>189<br>194 | 684     |  | 314                                        | 2075                                             | 8            | 104<br>102        | S<br>T               | 1245<br>2350                                         | 1325<br>2505         | 1405<br>2660         | 1485<br>2810         | 1565<br>2960         | 1645<br>3110         | 1720<br>3255         | 1800<br>3400         |      |      |      |                     |     |  |  |  |  |  |  |
| 195/75 R 16 C  | 8    | 107/105 R                | 5J<br>5½J<br>6J                                            | 199<br>204<br>209     | 199<br>204<br>209 | 710  | 716   | 191<br>196<br>201 | 698     |  | 320                                        | 2115                                             | 8            | 107<br>105        | S<br>T               | 1350<br>2560                                         | 1435<br>2730         | 1525<br>2895         | 1610<br>3060         | 1695<br>3220         | 1780<br>3380         | 1865<br>3540         | 1950<br>3700         |      |      |      |                     |     |  |  |  |  |  |  |
|                | 10   | 110/108 R                |                                                            |                       |                   |      |       |                   |         |  |                                            |                                                  | 1350<br>2555 | 1440<br>2725      | 1530<br>2890         | 1615<br>3055                                         | 1705<br>3215         | 1790<br>3375         | 1870<br>3535         | 1955<br>3690         | 2035<br>3845         | 2120<br>4000         |                      |      |      |      |                     |     |  |  |  |  |  |  |
|                | 10   | 110/108 T                |                                                            |                       |                   |      |       |                   |         |  |                                            |                                                  |              |                   |                      |                                                      |                      |                      |                      |                      |                      |                      |                      |      |      |      |                     |     |  |  |  |  |  |  |
| 205/75 R 16 C  | 8    | 110/108 R                | 5½J<br>6J<br>6½J                                           | 211<br>216<br>221     | 211<br>216<br>221 | 726  | 732   | 203<br>208<br>213 | 714     |  | 326                                        | 2165                                             | 8            | 110<br>108        | S<br>T               | 1465<br>2765                                         | 1560<br>2950         | 1660<br>3130         | 1750<br>3310         | 1845<br>3485         | 1935<br>3655         | 2030<br>3830         | 2120<br>4000         |      |      |      |                     |     |  |  |  |  |  |  |
|                | 8    | 110/108 T                |                                                            |                       |                   |      |       |                   |         |  |                                            |                                                  |              |                   |                      |                                                      |                      |                      |                      |                      |                      |                      |                      |      |      |      |                     |     |  |  |  |  |  |  |
|                | 10   | 116/114 R<br>(113/111 R) |                                                            |                       |                   |      |       |                   |         |  |                                            |                                                  | 1485<br>1465 | 1580<br>1565      | 1680<br>1660         | 1775<br>1755                                         | 1870<br>1850         | 1960<br>1940         | 2050<br>2030         | 2145<br>2120         | 2235<br>2210         | 2320<br>2300         | 2410<br>2500         |      |      |      |                     |     |  |  |  |  |  |  |
|                | 10   | 113/111 R                |                                                            |                       |                   |      |       |                   |         |  |                                            |                                                  | 2800<br>2785 | 2990<br>2970      | 3170<br>3150         | 3350<br>3330                                         | 3530<br>3505         | 3705<br>3680         | 3875<br>3850         | 4050<br>4020         | 4220<br>4190         | 4385<br>4360         | 4555<br>4720         |      |      |      |                     |     |  |  |  |  |  |  |
|                | 10   | 113/111 T                |                                                            |                       |                   |      |       |                   |         |  |                                            |                                                  |              |                   |                      |                                                      |                      |                      |                      |                      |                      |                      |                      |      |      |      |                     |     |  |  |  |  |  |  |

| Size           | Tyre |                                 | Permitted Rim width<br><br>in inch<br>(measuring rim bold) | Tyre dimensions in mm    |                          |      |       | New tyre                 |         |  | Radius <sup>3a)</sup><br><br>stat.<br>(mm) | Rolling circumference <sup>3b)</sup><br><br>(mm) |                              |                              |                              |                              | Load capacity (kg) per axle at a tyre pressure (bar) |                                      |                                      |                                      |                                      |                                      |                                      |                                      |                                      |                                      |                                      |                              |                              |                              |                              |
|----------------|------|---------------------------------|------------------------------------------------------------|--------------------------|--------------------------|------|-------|--------------------------|---------|--|--------------------------------------------|--------------------------------------------------|------------------------------|------------------------------|------------------------------|------------------------------|------------------------------------------------------|--------------------------------------|--------------------------------------|--------------------------------------|--------------------------------------|--------------------------------------|--------------------------------------|--------------------------------------|--------------------------------------|--------------------------------------|--------------------------------------|------------------------------|------------------------------|------------------------------|------------------------------|
|                | PR   | LI/SI <sup>6)</sup>             |                                                            | Std.                     | Spec.                    | Std. | Spec. | Width                    | Outer-Ø |  |                                            |                                                  |                              |                              |                              |                              | 10 <sup>1)</sup>                                     | 11 <sup>2)</sup>                     | 3.0                                  | 3.25                                 | 3.5                                  | 3.75                                 | 4.0                                  | 4.25                                 | 4.5                                  | 4.75                                 | 5.0                                  | 5.25                         | 5.5                          | 5.75                         | 6.0                          |
| 16 inch        |      |                                 |                                                            |                          |                          |      |       |                          |         |  |                                            |                                                  |                              |                              |                              |                              |                                                      |                                      |                                      |                                      |                                      |                                      |                                      |                                      |                                      |                                      |                                      |                              |                              |                              |                              |
| 215/75 R 16 C  | 8    | 113/111 R                       | 5½J<br>6J<br>6½J<br>7J                                     | 220<br>225<br>230<br>235 | 220<br>225<br>230<br>235 | 740  | 748   | 211<br>216<br>221<br>226 | 728     |  | 332                                        | 2205                                             | 8                            | 113<br>111                   | S<br>T                       | 1590<br>3015                 | 1695<br>3215                                         | 1800<br>3410                         | 1900<br>3605                         | 2000<br>3795                         | 2100<br>3985                         | 2200<br>4175                         | 2300<br>4360                         |                                      |                                      |                                      |                                      |                              |                              |                              |                              |
|                | 10   | 121/119 R                       |                                                            |                          |                          |      |       |                          |         |  |                                            |                                                  | 10                           | 121<br>116<br>119<br>114     | S<br>S<br>T<br>T             | 1720<br>1595<br>3230<br>3015 | 1835<br>1700<br>3445<br>3215                         | 1945<br>1805<br>3655<br>3410         | 2060<br>1910<br>4065<br>3605         | 2165<br>2010<br>4270<br>3795         | 2275<br>2110<br>4470<br>3985         | 2380<br>2305<br>4665<br>4170         | 2485<br>2305<br>4860<br>4355         | 2590<br>2400<br>5055<br>4535         | 2695<br>2500<br>5245<br>4720         | 2795<br>2900<br>5440                 |                                      |                              |                              |                              |                              |
|                | 10   | 116/114 R                       |                                                            |                          |                          |      |       |                          |         |  |                                            |                                                  |                              |                              |                              |                              |                                                      |                                      |                                      |                                      |                                      |                                      |                                      |                                      |                                      |                                      |                                      |                              |                              |                              |                              |
|                | 10   | 116/114 T                       |                                                            |                          |                          |      |       |                          |         |  |                                            |                                                  |                              |                              |                              |                              |                                                      |                                      |                                      |                                      |                                      |                                      |                                      |                                      |                                      |                                      |                                      |                              |                              |                              |                              |
| 225/75 R 16 C  | 8    | 116/114 R                       | 6J<br>6½J<br>7J                                            | 232<br>237<br>242        | 232<br>237<br>242        | 758  | 764   | 223<br>228<br>233        | 744     |  | 338                                        | 2255                                             | 8                            | 116<br>114                   | S<br>T                       | 1730<br>3265                 | 1845<br>3480                                         | 1955<br>3695                         | 2065<br>3905                         | 2175<br>4110                         | 2285<br>4315                         | 2390<br>4520                         | 2500<br>4720                         |                                      |                                      |                                      |                                      |                              |                              |                              |                              |
|                | 10   | 122<br>121<br>118<br>120<br>116 |                                                            |                          |                          |      |       |                          |         |  |                                            |                                                  |                              |                              |                              | S<br>S<br>S<br>T<br>T        | 1720<br>1720<br>1685<br>3325<br>3195                 | 1835<br>1835<br>1795<br>3545<br>3405 | 1945<br>1945<br>1905<br>3760<br>3610 | 2055<br>2060<br>2015<br>3975<br>3820 | 2165<br>2165<br>2120<br>4185<br>4020 | 2275<br>2275<br>2225<br>4395<br>4220 | 2380<br>2380<br>2330<br>4600<br>4415 | 2485<br>2485<br>2435<br>4805<br>4615 | 2590<br>2590<br>2535<br>5005<br>4805 | 2695<br>2695<br>2640<br>5205<br>5000 | 2795<br>2795<br>2900<br>5400<br>5600 | 2895<br>2900<br>5600         | 3000                         |                              |                              |
|                |      | 8                               |                                                            |                          |                          |      |       |                          |         |  |                                            |                                                  |                              |                              |                              |                              | 116<br>116<br>1.85 x 116                             | FA S<br>RA S<br>RA T                 | 1730<br>1535<br>3200                 | 1845<br>1640<br>3410                 | 1955<br>1740<br>3620                 | 2065<br>1840<br>4030                 | 2175<br>1935<br>4230                 | 2285<br>2030<br>4425                 | 2390<br>2125<br>4625                 | 2500<br>2220<br>4625                 | 2315                                 | 2405                         | 2500                         |                              |                              |
|                |      |                                 |                                                            |                          |                          |      |       |                          |         |  |                                            |                                                  |                              |                              |                              |                              |                                                      |                                      | 10                                   | 118<br>118<br>116<br>1.85 x 118      | FA S<br>RA S<br>RA T<br>RA T         | 1685<br>1515<br>3195<br>3120         | 1795<br>1615<br>3405<br>3325         | 1905<br>1715<br>3610<br>3530         | 2015<br>1810<br>3820<br>3730         | 2120<br>1905<br>4020<br>3925         | 2225<br>2000<br>4220<br>4120         | 2330<br>2095<br>4415<br>4315 | 2435<br>2185<br>4615<br>4505 | 2535<br>2280<br>4805<br>4695 | 2640<br>2370<br>5000<br>4880 |
|                | 8    | 116 R                           |                                                            |                          |                          |      |       |                          |         |  |                                            |                                                  |                              |                              |                              |                              |                                                      |                                      |                                      |                                      |                                      |                                      |                                      |                                      |                                      |                                      |                                      |                              |                              |                              |                              |
| 225/75 R 16 CP | 10   | 118/116 R                       |                                                            |                          |                          |      |       |                          |         |  |                                            |                                                  |                              |                              |                              |                              |                                                      |                                      |                                      |                                      |                                      |                                      |                                      |                                      |                                      |                                      |                                      |                              |                              |                              |                              |
|                | 10   | 118 R                           |                                                            |                          |                          |      |       |                          |         |  |                                            |                                                  |                              |                              |                              |                              |                                                      |                                      |                                      |                                      |                                      |                                      |                                      |                                      |                                      |                                      |                                      |                              |                              |                              |                              |
| 215/70 R 16 C  | 6    | 108/106 T                       | 5½J<br>6J<br>6½J<br>7J                                     | 220<br>225<br>230<br>235 | 220<br>225<br>230<br>235 | 720  | 726   | 211<br>216<br>221<br>226 | 708     |  | 324                                        | 2145                                             | 6                            | 108<br>106                   | S<br>T                       | 1670<br>3175                 | 1780<br>3385                                         | 1890<br>3595                         | 2000<br>3800                         |                                      |                                      |                                      |                                      |                                      |                                      |                                      |                                      |                              |                              |                              |                              |
| 195/65 R 16 C  | 8    | 104/102 R (100 R)               | 5½J<br>6½J<br>6J                                           | 204<br>214<br>209        | 204<br>214<br>209        | 670  | 676   | 196<br>206<br>201        | 660     |  | 305                                        | 2000                                             | 8                            | 104<br>100<br>102            | S<br>S<br>T                  | 1245<br>1335<br>2350         | 1325<br>1425<br>2505                                 | 1405<br>1510<br>2660                 | 1485<br>1600<br>2810                 | 1565<br>1960<br>2960                 | 1645<br>3110<br>3110                 | 1720<br>3255<br>3400                 | 1800                                 |                                      |                                      |                                      |                                      |                              |                              |                              |                              |
|                | 8    | 104/102 T (100 T)               |                                                            |                          |                          |      |       |                          |         |  |                                            |                                                  |                              |                              |                              |                              |                                                      |                                      |                                      |                                      |                                      |                                      |                                      |                                      |                                      |                                      |                                      |                              |                              |                              |                              |
| 205/65 R 16 C  | 6    | 103/101 H                       | 5½J<br>6J<br>6½J                                           | 212<br>217<br>222        | 212<br>217<br>222        | 682  | 688   | 204<br>209<br>214        | 672     |  | 309                                        | 2035                                             | 6                            | 103<br>101                   | S<br>T                       | 1460<br>2760                 | 1560<br>2940                                         | 1655<br>3120                         | 1750<br>3300                         |                                      |                                      |                                      |                                      |                                      |                                      |                                      |                                      |                              |                              |                              |                              |
|                | 8    | 107<br>103<br>105               | S<br>S<br>T                                                | 1350<br>1460<br>2560     | 1435<br>1560<br>2730     |      |       | 1525<br>1655<br>2895     |         |  |                                            |                                                  | 1610<br>1750<br>3060         | 1695<br>3220<br>3395         | 1780<br>3380<br>3565         | 1865<br>3730                 | 1950<br>3900                                         |                                      |                                      |                                      |                                      |                                      |                                      |                                      |                                      |                                      |                                      |                              |                              |                              |                              |
|                |      |                                 |                                                            |                          |                          |      |       |                          |         |  |                                            |                                                  |                              |                              |                              |                              |                                                      |                                      |                                      |                                      |                                      |                                      |                                      |                                      |                                      |                                      |                                      |                              |                              |                              |                              |
| 215/65 R 16 C  | 6    | 106/104 T                       | 6J<br>6½J<br>7J                                            | 225<br>230<br>235        | 225<br>230<br>235        | 698  | 702   | 216<br>221<br>226        | 686     |  | 315                                        | 2080                                             | 6                            | 106<br>104                   | S<br>T                       | 1585<br>3010                 | 1690<br>3210                                         | 1795<br>3405                         | 1900<br>3600                         |                                      |                                      |                                      |                                      |                                      |                                      |                                      |                                      |                              |                              |                              |                              |
|                | 8    | 109<br>106<br>107<br>104        |                                                            |                          |                          |      |       | S<br>S<br>T<br>T         |         |  |                                            |                                                  | 1425<br>1585<br>2700<br>3010 | 1520<br>1690<br>2875<br>3210 | 1610<br>1795<br>3050<br>3405 | 1705<br>1900<br>3225<br>3600 | 1795<br>3395                                         | 1880<br>3565                         | 1970<br>3730                         | 2060<br>3900                         |                                      |                                      |                                      |                                      |                                      |                                      |                                      |                              |                              |                              |                              |
|                |      |                                 |                                                            |                          |                          |      |       |                          |         |  |                                            |                                                  |                              |                              |                              |                              |                                                      |                                      |                                      |                                      |                                      |                                      |                                      |                                      |                                      |                                      |                                      |                              |                              |                              |                              |
|                |      |                                 |                                                            |                          |                          |      |       |                          |         |  |                                            |                                                  |                              |                              |                              |                              |                                                      |                                      |                                      |                                      |                                      |                                      |                                      |                                      |                                      |                                      |                                      |                              |                              |                              |                              |
|                |      |                                 |                                                            |                          |                          |      |       |                          |         |  |                                            |                                                  |                              |                              |                              |                              |                                                      |                                      |                                      |                                      |                                      |                                      |                                      |                                      |                                      |                                      |                                      |                              |                              |                              |                              |

| Size           | Tyre |                          | Permitted Rim width<br><br>in inch<br>(measuring rim bold) | Tyre dimensions in mm |                   |      |       | New tyre          |         | Radius <sup>3a)</sup><br><br>stat.<br>(mm) | Rolling circumference <sup>3b)</sup><br><br>(mm) | PR   | LI         | Pos. <sup>10)</sup>                    | Load capacity (kg) per axle at a tyre pressure (bar) |                                              |                                              |                                              |                                              |                                              |                                              |                                              |                                              |                                              |                                      |                              |                              |                              |                              |                              |                              |                              |      |      |      |  |  |  |  |  |  |
|----------------|------|--------------------------|------------------------------------------------------------|-----------------------|-------------------|------|-------|-------------------|---------|--------------------------------------------|--------------------------------------------------|------|------------|----------------------------------------|------------------------------------------------------|----------------------------------------------|----------------------------------------------|----------------------------------------------|----------------------------------------------|----------------------------------------------|----------------------------------------------|----------------------------------------------|----------------------------------------------|----------------------------------------------|--------------------------------------|------------------------------|------------------------------|------------------------------|------------------------------|------------------------------|------------------------------|------------------------------|------|------|------|--|--|--|--|--|--|
|                | PR   | LI/SI <sup>6)</sup>      |                                                            | Std.                  | Spec.             | Std. | Spec. | Width             | Outer-Ø |                                            |                                                  |      |            |                                        | <sup>11)</sup> 3.0                                   | <sup>11)</sup> 3.25                          | <sup>11)</sup> 3.5                           | <sup>11)</sup> 3.75                          | <sup>11)</sup> 4.0                           | <sup>11)</sup> 4.25                          | <sup>11)</sup> 4.5                           | <sup>12)</sup> 4.75                          | 5.0                                          | 5.25                                         | 5.5                                  | <sup>13)</sup> 5.75          | 6.0                          |                              |                              |                              |                              |                              |      |      |      |  |  |  |  |  |  |
| 16 inch        |      |                          |                                                            |                       |                   |      |       |                   |         |                                            |                                                  |      |            |                                        |                                                      |                                              |                                              |                                              |                                              |                                              |                                              |                                              |                                              |                                              |                                      |                              |                              |                              |                              |                              |                              |                              |      |      |      |  |  |  |  |  |  |
| 225/65 R 16 C  | 8    | 112/110 R                | 6J<br>6½J<br>7J                                            | 232                   | 232               | 710  | 716   | 223               | 698     |                                            | 320                                              | 2115 | 8          | 112<br>110                             | S<br>T                                               | 1550<br>2935                                 | 1650<br>3125                                 | 1750<br>3320                                 | 1850<br>3505                                 | 1950<br>3695                                 | 2045<br>3875                                 | 2145<br>4060                                 | 2240<br>4240                                 |                                              |                                      |                              |                              |                              |                              |                              |                              |                              |      |      |      |  |  |  |  |  |  |
|                | 8    | 112/110 T                |                                                            | 237<br>242            | 237<br>242        |      |       | 228<br>233        |         |                                            |                                                  |      |            |                                        |                                                      |                                              |                                              |                                              |                                              |                                              |                                              |                                              |                                              |                                              |                                      |                              |                              |                              |                              |                              |                              |                              |      |      |      |  |  |  |  |  |  |
| 225/65 R 16 CP | 8    | 112 R                    |                                                            |                       |                   |      |       |                   |         |                                            |                                                  |      |            |                                        |                                                      |                                              |                                              |                                              |                                              | 8                                            | 112<br>112<br>1.85 x 112                     | FA S<br>RA S<br>RA T                         | 1550<br>1375<br>2865                         | 1650<br>1470<br>3055                         | 1750<br>1560<br>3245                 | 1850<br>1645<br>3425         | 1950<br>1735<br>3610         | 2045<br>1820<br>3790         | 2145<br>1905<br>3965         | 2240<br>1990<br>4140         | 2075                         | 2155                         | 2240 |      |      |  |  |  |  |  |  |
| 235/65 R 16 C  | 8    | 115/113 R                | 6½J<br>7J<br>7½J                                           | 245<br>250<br>255     | 245<br>250<br>255 | 724  | 730   | 235<br>240<br>245 | 712     | 325                                        | 2155                                             | 8    | 115<br>113 | S<br>T                                 | 1680<br>3180                                         | 1790<br>3395                                 | 1900<br>3600                                 | 2010<br>3805                                 | 2115<br>4005                                 | 2220<br>4205                                 | 2325<br>4405                                 | 2430<br>4600                                 |                                              |                                              |                                      |                              |                              |                              |                              |                              |                              |                              |      |      |      |  |  |  |  |  |  |
|                | 10   | 121/119 Q                |                                                            |                       |                   |      |       |                   |         |                                            |                                                  |      | 10         | 121<br>118<br>115<br>119<br>116<br>113 | S<br>S<br>S<br>T<br>T<br>T                           | 1720<br>1685<br>1680<br>3230<br>3195<br>3180 | 1835<br>1795<br>1790<br>3445<br>3405<br>3395 | 1945<br>1905<br>2010<br>3655<br>4020<br>3600 | 2060<br>2015<br>2115<br>4065<br>4270<br>4005 | 2165<br>2120<br>2220<br>4270<br>4020<br>4005 | 2275<br>2225<br>2320<br>4470<br>4415<br>4205 | 2380<br>2330<br>2325<br>4665<br>4615<br>4205 | 2485<br>2435<br>2430<br>4860<br>4615<br>4305 | 2590<br>2535<br>2640<br>4860<br>4805<br>4915 | 2695<br>2640<br>5055<br>5245<br>5000 | 2795<br>2900<br>5440         |                              |                              |                              |                              |                              |                              |      |      |      |  |  |  |  |  |  |
|                | 10   | 121/119 R                |                                                            |                       |                   |      |       |                   |         |                                            |                                                  |      |            |                                        |                                                      |                                              |                                              |                                              |                                              |                                              |                                              |                                              |                                              |                                              |                                      |                              |                              |                              |                              |                              |                              |                              |      |      |      |  |  |  |  |  |  |
|                | 10   | 118/116 R<br>(115/113 S) |                                                            |                       |                   |      |       |                   |         |                                            |                                                  |      |            |                                        |                                                      |                                              |                                              |                                              |                                              |                                              |                                              |                                              |                                              |                                              |                                      |                              |                              |                              |                              |                              |                              |                              |      |      |      |  |  |  |  |  |  |
|                |      |                          |                                                            |                       |                   |      |       |                   |         |                                            |                                                  |      |            |                                        |                                                      |                                              |                                              |                                              |                                              |                                              |                                              |                                              |                                              |                                              |                                      |                              |                              |                              |                              |                              |                              |                              |      |      |      |  |  |  |  |  |  |
| 235/65 R 16 CP | 8    | 115/113 R                |                                                            |                       |                   |      |       |                   |         |                                            |                                                  |      |            |                                        |                                                      |                                              |                                              |                                              |                                              |                                              |                                              | 8                                            | 115<br>115<br>113<br>1.85 x 115              | FA S<br>RA S<br>RA T<br>RA T                 | 1680<br>1495<br>3180<br>3110         | 1790<br>1595<br>3395<br>3315 | 1900<br>1690<br>3600<br>3520 | 2010<br>1785<br>3805<br>3720 | 2115<br>1880<br>4005<br>3915 | 2220<br>1975<br>4205<br>4110 | 2325<br>2065<br>4405<br>4305 | 2430<br>2160<br>4600<br>4495 | 2250 | 2340 | 2430 |  |  |  |  |  |  |
|                | 8    | 115 R                    |                                                            |                       |                   |      |       |                   |         |                                            |                                                  |      |            |                                        |                                                      |                                              |                                              |                                              |                                              |                                              |                                              |                                              |                                              |                                              |                                      |                              |                              |                              |                              |                              |                              |                              |      |      |      |  |  |  |  |  |  |
| 285/65 R 16 C  | 10   | 131 R                    | 8J<br>8½J<br>9J                                            | 299<br>304<br>309     | 299<br>304<br>309 | 790  | 798   | 287<br>292<br>297 | 776     |                                            | 351                                              | 2350 | 10         | 131                                    | S                                                    | 2315                                         | 2470                                         | 2620                                         | 2770                                         | 2915                                         | 3060                                         | 3205                                         | 3345                                         | 3485                                         | 3625                                 | 3760                         | 3900                         |                              |                              |                              |                              |                              |      |      |      |  |  |  |  |  |  |
| 195/60 R 16 C  | 6    | 99/97 H                  | 5½J<br>6J                                                  | 204<br>209            | 204<br>209        | 650  | 654   | 196<br>201        | 640     | 297                                        | 1940                                             | 6    | 99<br>97   | S<br>T                                 | 1295<br>2440                                         | 1380<br>2600                                 | 1465<br>2760                                 | 1550<br>2920                                 |                                              |                                              |                                              |                                              |                                              |                                              |                                      |                              |                              |                              |                              |                              |                              |                              |      |      |      |  |  |  |  |  |  |
|                | 6    | 99/97 T                  | 6½J                                                        | 214                   | 214               |      |       | 206               |         |                                            |                                                  |      |            |                                        |                                                      |                                              |                                              |                                              |                                              |                                              |                                              |                                              |                                              |                                              |                                      |                              |                              |                              |                              |                              |                              |                              |      |      |      |  |  |  |  |  |  |
| 205/60 R 16 C  | 6    | 100/98 T                 | 6J<br>6½J                                                  | 217<br>222            | 217<br>222        | 662  | 666   | 209<br>214        | 652     |                                            | 301                                              | 1975 | 6          | 100<br>98                              | S<br>T                                               | 1335<br>2505                                 | 1425<br>2675                                 | 1510<br>2835                                 | 1600<br>3000                                 |                                              |                                              |                                              |                                              |                                              |                                      |                              |                              |                              |                              |                              |                              |                              |      |      |      |  |  |  |  |  |  |
| 215/60 R 16 C  | 6    | 103/101 T                | 6J<br>6½J<br>7J                                            | 225<br>230<br>235     | 225<br>230<br>235 | 674  | 680   | 216<br>221<br>226 | 664     |                                            | 306                                              | 2010 | 6          | 103<br>101                             | S<br>T                                               | 1460<br>2760                                 | 1560<br>2940                                 | 1655<br>3120                                 | 1750<br>3300                                 |                                              |                                              |                                              |                                              |                                              |                                      |                              |                              |                              |                              |                              |                              |                              |      |      |      |  |  |  |  |  |  |
| 225/60 R 16 C  | 6    | 105/103 H<br>(101 H)     | 6½J<br>7J<br>7½J                                           | 237<br>242<br>247     | 237<br>242<br>247 | 686  | 692   | 228<br>233<br>238 | 676     |                                            | 311                                              | 2050 | 6          | 105<br>101<br>103                      | S<br>S<br>T                                          | 1545<br>1545<br>2925                         | 1645<br>1650<br>3120                         | 1750<br>3310                                 | 1850<br>3500                                 |                                              |                                              |                                              |                                              |                                              |                                      |                              |                              |                              |                              |                              |                              |                              |      |      |      |  |  |  |  |  |  |
| 285/55 R 16 C  | 10   | 126 N                    | 8½J<br>9J<br>9½J                                           | 304<br>309<br>314     | 304<br>309<br>314 | 732  | 738   | 292<br>297<br>302 | 720     |                                            | 329                                              | 2180 | 10         | 126                                    | S                                                    | 2020                                         | 2150                                         | 2285                                         | 2415                                         | 2540                                         | 2665                                         | 2790                                         | 2915                                         | 3040                                         | 3160                                 | 3280                         | 3400                         |                              |                              |                              |                              |                              |      |      |      |  |  |  |  |  |  |
| 17 inch        |      |                          |                                                            |                       |                   |      |       |                   |         |                                            |                                                  |      |            |                                        |                                                      |                                              |                                              |                                              |                                              |                                              |                                              |                                              |                                              |                                              |                                      |                              |                              |                              |                              |                              |                              |                              |      |      |      |  |  |  |  |  |  |
| 225/75 R 17 C  | 6    | 114/112 Q                | 6J<br>6½J                                                  | 232<br>237            | 232<br>237        | 784  | 790   | 223<br>228        | 770     | 351                                        | 2335                                             | 6    | 114<br>112 | S<br>T                                 | 1970<br>3745                                         | 2100<br>3995                                 | 2230<br>4235                                 | 2360<br>4480                                 |                                              |                                              |                                              |                                              |                                              |                                              |                                      |                              |                              |                              |                              |                              |                              |                              |      |      |      |  |  |  |  |  |  |
|                | 6    | 114/112 R                | 7J                                                         | 242                   | 242               |      |       | 233               |         |                                            |                                                  |      |            |                                        |                                                      |                                              |                                              |                                              |                                              |                                              |                                              |                                              |                                              |                                              |                                      |                              |                              |                              |                              |                              |                              |                              |      |      |      |  |  |  |  |  |  |
| 205/70 R 17 C  | 10   | 115/113 R                | 5½J<br>6J<br>6½J                                           | 212<br>217<br>222     | 212<br>217<br>222 | 732  | 738   | 204<br>209<br>214 | 720     |                                            | 331                                              | 2180 | 10         | 115<br>113                             | S<br>T                                               | 1550<br>2935                                 | 1655<br>3130                                 | 1755<br>3325                                 | 1855<br>3510                                 | 1950<br>3700                                 | 2050<br>3880                                 | 2145<br>4065                                 | 2240<br>4245                                 | 2335<br>4420                                 | 2430<br>4600                         |                              |                              |                              |                              |                              |                              |                              |      |      |      |  |  |  |  |  |  |
| 215/65 R 17 C  | 6    | 107/105 T                | 6J<br>6½J<br>7J                                            | 225<br>230<br>235     | 225<br>230<br>235 | 724  | 728   | 216<br>221<br>226 | 712     |                                            | 328                                              | 2155 | 6          | 107<br>105                             | S<br>T                                               | 1630<br>3095                                 | 1735<br>3295                                 | 1845<br>3500                                 | 1950<br>3700                                 |                                              |                                              |                                              |                                              |                                              |                                      |                              |                              |                              |                              |                              |                              |                              |      |      |      |  |  |  |  |  |  |

| Tyre           |    |                      | Permitted Rim width<br><br>in inch<br>(measuring rim bold) | Tyre dimensions in mm |                   |         |       | New tyre          |         | Radius <sup>3a)</sup><br><br>stat.<br>(mm) | Rolling circum-<br>ference <sup>3)</sup><br><br>(mm) | PR   | LI | Pos. <sup>10)</sup>      | Load capacity (kg) per axle at a tyre pressure (bar) |                      |                      |                      |                      |                      |                      |                      |                      |                      |                      |                      |              |                     |     |  |  |
|----------------|----|----------------------|------------------------------------------------------------|-----------------------|-------------------|---------|-------|-------------------|---------|--------------------------------------------|------------------------------------------------------|------|----|--------------------------|------------------------------------------------------|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|--------------|---------------------|-----|--|--|
| Size           | PR | LI/SI <sup>6)</sup>  |                                                            | Width                 |                   | Outer-Ø |       | Width             | Outer-Ø |                                            |                                                      |      |    |                          |                                                      | 11)                  | 3.0                  | 3.25                 | 3.5                  | 3.75                 | 4.0                  | 4.25                 | 4.5                  | 4.75 <sup>12)</sup>  | 5.0                  | 5.25                 | 5.5          | 5.75 <sup>13)</sup> | 6.0 |  |  |
|                |    |                      |                                                            | Std.                  | Spec.             | Std.    | Spec. |                   |         |                                            |                                                      |      |    |                          |                                                      |                      |                      |                      |                      |                      |                      |                      |                      |                      |                      |                      |              |                     |     |  |  |
|                |    |                      |                                                            |                       |                   |         |       |                   |         |                                            |                                                      |      |    |                          |                                                      |                      |                      |                      |                      |                      |                      |                      |                      |                      |                      |                      |              |                     |     |  |  |
| 17 inch        |    |                      |                                                            |                       |                   |         |       |                   |         |                                            |                                                      |      |    |                          |                                                      |                      |                      |                      |                      |                      |                      |                      |                      |                      |                      |                      |              |                     |     |  |  |
| 215/60 R 17 C  | 6  | 104/102 H            | 6J<br>6½J<br>7J                                            | 225<br>230<br>235     | 225<br>230<br>235 | 700     | 706   | 216<br>221<br>226 | 690     |                                            | 319                                                  | 2090 | 6  | 104<br>102               | S<br>T                                               | 1505<br>2840         | 1605<br>3030         | 1700<br>3215         | 1800<br>3400         |                      |                      |                      |                      |                      |                      |                      |              |                     |     |  |  |
|                | 8  | 109/107 T<br>(104 H) |                                                            |                       |                   |         |       |                   |         |                                            |                                                      |      | 8  | 109<br>104<br>107        | S<br>S<br>T                                          | 1425<br>1505<br>2700 | 1520<br>1605<br>2875 | 1610<br>1700<br>3050 | 1705<br>1800<br>3225 | 1795<br>1880<br>3395 | 1880<br>1970<br>3565 | 1970<br>2060<br>3730 | 2060<br>3900         |                      |                      |                      |              |                     |     |  |  |
| 235/60 R 17 C  | 8  | 114/112 R            | 6½J<br>7J<br>7½J                                           | 245<br>250<br>255     | 245<br>250<br>255 | 726     | 730   | 235<br>240<br>245 | 714     |                                            | 329                                                  | 2165 | 8  | 114<br>112               | S<br>T                                               | 1630<br>3100         | 1740<br>3305         | 1845<br>3505         | 1950<br>3705         | 2055<br>3900         | 2155<br>4095         | 2260<br>4290         | 2360<br>4480         |                      |                      |                      |              |                     |     |  |  |
|                | 10 | 117/115 R            |                                                            |                       |                   |         |       |                   |         |                                            |                                                      |      | 10 | 117<br>115               | S<br>T                                               | 1640<br>3105         | 1750<br>3310         | 1855<br>3510         | 1960<br>3710         | 2065<br>3905         | 2170<br>4100         | 2270<br>4295         | 2370<br>4485         | 2470<br>4670         | 2570<br>4860         |                      |              |                     |     |  |  |
| 225/55 R 17 C  | 8  | 109/107 H<br>(104 H) | 6½J<br>7J<br>7½J                                           | 237<br>242<br>247     | 237<br>242<br>247 | 690     | 694   | 228<br>233<br>238 | 680     |                                            | 315                                                  | 2060 | 8  | 109<br>104<br>107        | S<br>S<br>T                                          | 1425<br>1505<br>2700 | 1520<br>1605<br>2875 | 1610<br>1700<br>3050 | 1705<br>1800<br>3225 | 1795<br>1880<br>3395 | 1880<br>1970<br>3565 | 1970<br>2060<br>3730 | 2060<br>3900         |                      |                      |                      |              |                     |     |  |  |
|                | 8  | 109/107 S<br>(104 T) |                                                            |                       |                   |         |       |                   |         |                                            |                                                      |      |    |                          |                                                      |                      |                      |                      |                      |                      |                      |                      |                      |                      |                      |                      |              |                     |     |  |  |
|                | 8  | 109/107 T            |                                                            |                       |                   |         |       |                   |         |                                            |                                                      |      |    |                          |                                                      |                      |                      |                      |                      |                      |                      |                      |                      |                      |                      |                      |              |                     |     |  |  |
|                | 8  | 109/107 T<br>(104 T) |                                                            |                       |                   |         |       |                   |         |                                            |                                                      |      |    |                          |                                                      |                      |                      |                      |                      |                      |                      |                      |                      |                      |                      |                      |              |                     |     |  |  |
| 315/55 R 17 C  | 10 | 132 Q                |                                                            |                       |                   | 792     | 798   |                   | 778     |                                            | 354                                                  | 2355 | 10 | 132                      | S                                                    | 2375                 | 2530                 | 2685                 | 2840                 | 2990                 | 3140                 | 3285                 | 3430                 | 3575                 | 3715                 | 3860                 | 4000         |                     |     |  |  |
| 18 inch        |    |                      |                                                            |                       |                   |         |       |                   |         |                                            |                                                      |      |    |                          |                                                      |                      |                      |                      |                      |                      |                      |                      |                      |                      |                      |                      |              |                     |     |  |  |
| 235/55 R 18 C  | 10 | 118/116 R            | 7J<br>7½J                                                  | 250<br>255            | 250<br>255        | 725     | 731   | 240<br>245        | 715     |                                            | 332                                                  | 2165 | 10 | 118<br>116               | S<br>T                                               | 1565<br>2970         | 1670<br>3165         | 1770<br>3360         | 1875<br>3550         | 1970<br>3740         | 2070<br>3925         | 2165<br>4105         | 2265<br>4290         | 2360<br>4470         | 2450<br>4645         | 2545<br>4825         | 2640<br>5000 |                     |     |  |  |
| 255/55 R 18 CP | 10 | 120 R                | 7½J<br>8J<br>8½J                                           | 271<br>276<br>281     | 271<br>276<br>281 | 749     | 753   | 260<br>265<br>270 | 737     |                                            | 341                                                  | 2235 | 10 | 120<br>120<br>1.85 x 120 | FA S<br>RA S<br>RA T                                 | 1785<br>1605<br>3310 | 1905<br>1710<br>3525 | 2020<br>1815<br>3745 | 2135<br>1920<br>3955 | 2250<br>2020<br>4165 | 2360<br>2120<br>4370 | 2475<br>2220<br>4575 | 2580<br>2320<br>4780 | 2690<br>2415<br>4980 | 2800<br>2515<br>5180 | 2610<br>2705<br>2800 |              |                     |     |  |  |
| 19 inch        |    |                      |                                                            |                       |                   |         |       |                   |         |                                            |                                                      |      |    |                          |                                                      |                      |                      |                      |                      |                      |                      |                      |                      |                      |                      |                      |              |                     |     |  |  |
| 235/50 R 19 C  | 8  | 111/109 T            | 7J<br>7½J                                                  | 250<br>255            | 250<br>255        | 729     | 733   | 240<br>245        | 719     |                                            | 336                                                  | 2180 | 8  | 111<br>109               | S<br>T                                               | 1505<br>2850         | 1605<br>3040         | 1705<br>3225         | 1800<br>3410         | 1895<br>3590         | 1990<br>3765         | 2085<br>3945         | 2180<br>4120         |                      |                      |                      |              |                     |     |  |  |

Increased load capacity of tyres on caravans and lightweight trailers (only applies to trailers with a max. speed of 100 km/h or 62 mph entered in the car registration documents).

| Tyre size           | LI  | Max. Load capacity<br>kg | Max. Inflation pressure<br>(bar) |
|---------------------|-----|--------------------------|----------------------------------|
| Passenger Car Tyres |     |                          |                                  |
| 82/80 series        |     |                          |                                  |
| 175 R 13            | 86  | 585                      | 2,6                              |
| 125/80 R 13         | 65  | 320                      | 2,6                              |
| 135/80 R 13         | 70  | 370                      | 2,6                              |
| 145/80 R 13         | 75  | 425                      | 2,6                              |
| 155/80 R 13         | 79  | 480                      | 2,6                              |
| 155/80 R 13 Rf.     | 83  | 535                      | 3,1                              |
| 165/80 R 13         | 83  | 535                      | 2,6                              |
| 165/80 R 13 Rf.     | 87  | 600                      | 3,1                              |
| 145/80 R 14         | 76  | 440                      | 2,6                              |
| 165/80 R 14         | 85  | 565                      | 2,6                              |
| 175/80 R 14         | 88  | 615                      | 2,6                              |
| 185/80 R 14         | 91  | 675                      | 2,6                              |
| 165/80 R 15         | 87  | 600                      | 2,6                              |
| 195/80 R 15         | 96  | 780                      | 2,6                              |
| 215/80 R 15         | 102 | 935                      | 2,6                              |
| 205/80 R 16 XL      | 104 | 990                      | 3,0                              |
| 75 series           |     |                          |                                  |
| 205/75 R 15         | 97  | 805                      | 2,7                              |
| 215/75 R 15         | 100 | 880                      | 2,7                              |
| 225/75 R 15         | 102 | 935                      | 2,7                              |
| P 235/75 R 15       | 105 | 1020                     | 2,7                              |
| 235/75 R 15 XL      | 109 | 1135                     | 3,1                              |
| 265/75 R 15         | 112 | 1230                     | 2,7                              |
| 195/75 R 16 Rf.     | 100 | 880                      | 3,1                              |
| 215/75 R 16 XL      | 107 | 1070                     | 3,1                              |
| 225/75 R 16         | 104 | 990                      | 2,7                              |
| 225/75 R 16 XL      | 108 | 1100                     | 3,1                              |
| P 235/75 R 16       | 106 | 1045                     | 2,7                              |
| 235/75 R 16         | 108 | 1100                     | 2,7                              |
| 235/75 R 16 XL      | 112 | 1230                     | 3,1                              |
| 245/75 R 16         | 111 | 1200                     | 2,7                              |
| 265/75 R 16         | 116 | 1375                     | 2,7                              |
| 235/75 R 17         | 109 | 1135                     | 2,7                              |
| 70 series           |     |                          |                                  |
| 135/70 R 13         | 68  | 345                      | 2,7                              |
| 145/70 R 13         | 71  | 380                      | 2,7                              |

Conditions of use:  
An increase of 10 % for passenger tyres resp. 5 % for C van tyres over the load capacity, as quoted in these tables, is permitted when tyres are fitted to caravans

| Tyre size            | LI  | Max. Load capacity<br>kg | Max. Inflation pressure<br>(bar) |
|----------------------|-----|--------------------------|----------------------------------|
| Passenger Car Tyres  |     |                          |                                  |
| 70 series            |     |                          |                                  |
| 155/70 R 13          | 75  | 425                      | 2,7                              |
| 165/70 R 13          | 79  | 480                      | 2,7                              |
| 165/70 R 13 XL / Rf. | 83  | 535                      | 3,1                              |
| 175/70 R 13          | 82  | 525                      | 2,7                              |
| 175/70 R 13 XL       | 86  | 585                      | 3,1                              |
| 185/70 R 13          | 86  | 585                      | 2,7                              |
| 155/70 R 14          | 77  | 455                      | 2,7                              |
| 165/70 R 14          | 81  | 510                      | 2,7                              |
| 165/70 R 14 XL / Rf. | 85  | 565                      | 3,1                              |
| 175/70 R 14          | 84  | 550                      | 2,7                              |
| 175/70 R 14 XL       | 88  | 615                      | 3,1                              |
| 185/70 R 14          | 88  | 615                      | 2,7                              |
| 185/70 R 14 XL       | 92  | 695                      | 3,1                              |
| 195/70 R 14          | 91  | 675                      | 2,7                              |
| 205/70 R 14          | 95  | 760                      | 2,7                              |
| 205/70 R 14 XL       | 98  | 825                      | 3,1                              |
| 135/70 R 15          | 70  | 370                      | 2,7                              |
| 155/70 R 15          | 78  | 470                      | 2,7                              |
| 195/70 R 15 Rf.      | 97  | 805                      | 3,1                              |
| 205/70 R 15          | 96  | 780                      | 2,7                              |
| 205/70 R 15 XL       | 100 | 880                      | 3,1                              |
| 215/70 R 15          | 98  | 825                      | 2,7                              |
| 225/70 R 15          | 100 | 880                      | 2,7                              |
| 235/70 R 15          | 103 | 960                      | 2,7                              |
| 255/70 R 15          | 108 | 1100                     | 2,7                              |
| 265/70 R 15          | 112 | 1230                     | 2,7                              |
| 195/70 R 16          | 94  | 735                      | 2,7                              |
| 205/70 R 16          | 97  | 805                      | 2,7                              |
| P 215/70 R 16        | 99  | 855                      | 2,7                              |
| 215/70 R 16          | 100 | 880                      | 2,7                              |
| 215/70 R 16 XL       | 104 | 990                      | 3,1                              |
| 225/70 R 16          | 102 | 935                      | 2,7                              |
|                      | 103 | 965                      | 2,7                              |
| 225/70 R 16 XL       | 107 | 1070                     | 3,1                              |
| P 235/70 R 16        | 104 | 990                      | 2,7                              |
| 235/70 R 16          | 105 | 1020                     | 2,7                              |

and light trailers with a maximum operating speed up to 100 km/h (62 mph). The basic inflation pressure should be increased by 0.2 bar for passenger tyres and by +6 % for C van tyres, as quoted in these tables.

Increased load capacity of tyres on caravans and lightweight trailers (only applies to trailers with a max. speed of 100 km/h or 62 mph entered in the car registration documents).

| Tyre size            | LI  | Max. Load capacity<br>kg | Max. Inflation pressure<br>(bar) |
|----------------------|-----|--------------------------|----------------------------------|
| Passenger Car Tyres  |     |                          |                                  |
| 70 series            |     |                          |                                  |
| 245/70 R 16          | 107 | 1070                     | 2,7                              |
| 245/70 R 16 XL       | 111 | 1200                     | 3,1                              |
| 255/70 R 16          | 111 | 1200                     | 2,7                              |
| 255/70 R 16 XL       | 115 | 1335                     | 3,1                              |
| 265/70 R 16          | 112 | 1230                     | 2,7                              |
| 275/70 R 16          | 114 | 1300                     | 2,7                              |
| 225/70 R 17 XL       | 108 | 1100                     | 3,1                              |
| 235/70 R 17 XL       | 109 | 1135                     | 3,1                              |
|                      | 111 | 1200                     | 3,1                              |
| P 245/70 R 17        | 108 | 1100                     | 2,7                              |
| 245/70 R 17          | 110 | 1165                     | 2,7                              |
| 245/70 R 17 XL       | 114 | 1300                     | 3,1                              |
| P 255/70 R 17        | 110 | 1165                     | 2,7                              |
| 255/70 R 17          | 112 | 1230                     | 2,7                              |
| P 265/70 R 17        | 113 | 1265                     | 2,7                              |
| 265/70 R 17          | 115 | 1335                     | 2,7                              |
| 235/70 R 18          | 110 | 1165                     | 2,7                              |
| 265/70 R 18          | 116 | 1375                     | 2,7                              |
| 155/70 R 19          | 84  | 550                      | 2,7                              |
| 155/70 R 19 XL       | 88  | 615                      | 3,1                              |
| 65 series            |     |                          |                                  |
| 155/65 R 13          | 73  | 400                      | 2,7                              |
| 165/65 R 13          | 77  | 455                      | 2,7                              |
| 175/65 R 13          | 80  | 495                      | 2,7                              |
| 155/65 R 14          | 75  | 425                      | 2,7                              |
| 155/65 R 14 XL       | 79  | 480                      | 3,1                              |
| 165/65 R 14          | 79  | 480                      | 2,7                              |
| 165/65 R 14 XL       | 83  | 535                      | 3,1                              |
| 175/65 R 14          | 82  | 525                      | 2,7                              |
| 175/65 R 14 XL / Rf. | 86  | 585                      | 3,1                              |
| 185/65 R 14          | 86  | 585                      | 2,7                              |
| 185/65 R 14 XL       | 90  | 660                      | 3,1                              |
| 195/65 R 14          | 89  | 640                      | 2,7                              |
| 145/65 R 15          | 72  | 390                      | 2,7                              |
| 155/65 R 15          | 77  | 455                      | 2,7                              |
| 165/65 R 15          | 81  | 510                      | 2,7                              |
| 175/65 R 15          | 84  | 550                      | 2,7                              |
| 175/65 R 15 XL       | 88  | 615                      | 3,1                              |
| 185/65 R 15          | 88  | 615                      | 2,7                              |
| 185/65 R 15 XL       | 92  | 695                      | 3,1                              |
| 195/65 R 15          | 91  | 675                      | 2,7                              |
| 195/65 R 15 XL / Rf. | 95  | 760                      | 3,1                              |

| Tyre size            | LI  | Max. Load capacity<br>kg | Max. Inflation pressure<br>(bar) |
|----------------------|-----|--------------------------|----------------------------------|
| Passenger Car Tyres  |     |                          |                                  |
| 65 series            |     |                          |                                  |
| 205/65 R 15          | 94  | 735                      | 2,7                              |
| 205/65 R 15 XL / Rf. | 99  | 855                      | 3,1                              |
| 215/65 R 15          | 96  | 780                      | 2,7                              |
| 215/65 R 15 Rf.      | 100 | 880                      | 3,1                              |
| 195/65 R 16          | 92  | 695                      | 2,7                              |
| 205/65 R 16          | 95  | 760                      | 2,7                              |
| 215/65 R 16          | 98  | 825                      | 2,7                              |
| 215/65 R 16 XL       | 102 | 935                      | 3,1                              |
| 235/65 R 16          | 103 | 965                      | 2,7                              |
| 255/65 R 16          | 109 | 1135                     | 2,7                              |
| 175/65 R 17          | 87  | 600                      | 2,7                              |
| 205/65 R 17          | 96  | 780                      | 2,7                              |
| 215/65 R 17          | 98  | 825                      | 2,7                              |
|                      | 99  | 855                      | 2,7                              |
| 215/65 R 17 XL       | 103 | 965                      | 3,1                              |
| 225/65 R 17          | 102 | 935                      | 2,7                              |
| 225/65 R 17 XL       | 106 | 1045                     | 3,1                              |
| 235/65 R 17          | 103 | 965                      | 2,7                              |
|                      | 104 | 990                      | 2,7                              |
| 235/65 R 17 XL       | 108 | 1100                     | 3,1                              |
| 245/65 R 17          | 107 | 1070                     | 2,7                              |
| 245/65 R 17 XL       | 111 | 1200                     | 3,1                              |
| 255/65 R 17          | 110 | 1165                     | 2,7                              |
| 255/65 R 17 XL       | 114 | 1300                     | 3,1                              |
| 265/65 R 17          | 112 | 1230                     | 2,7                              |
| 265/65 R 17 XL       | 116 | 1375                     | 3,1                              |
| 275/65 R 17          | 115 | 1335                     | 2,7                              |
| 285/65 R 17          | 116 | 1375                     | 2,7                              |
| 235/65 R 18          | 106 | 1045                     | 2,7                              |
| 235/65 R 18 XL       | 110 | 1165                     | 3,1                              |
| 255/65 R 18          | 111 | 1200                     | 2,7                              |
| 265/65 R 18          | 114 | 1300                     | 2,7                              |
| 275/65 R 18          | 116 | 1375                     | 2,7                              |
| 235/65 R 19 XL       | 109 | 1135                     | 3,1                              |
| 255/65 R 19 XL       | 114 | 1300                     | 3,1                              |
| 60 series            |     |                          |                                  |
| 165/60 R 13          | 73  | 400                      | 2,7                              |
| 175/60 R 13          | 77  | 455                      | 2,7                              |
| 185/60 R 13          | 80  | 495                      | 2,7                              |
| 165/60 R 14          | 75  | 425                      | 2,7                              |
| 165/60 R 14 XL       | 79  | 480                      | 3,1                              |
| 175/60 R 14          | 79  | 480                      | 2,7                              |

Increased load capacity of tyres on caravans and lightweight trailers (only applies to trailers with a max. speed of 100 km/h or 62 mph entered in the car registration documents).

| Tyre size                  | LI  | Max. Load capacity<br>kg | Max. Inflation pressure<br>(bar) |
|----------------------------|-----|--------------------------|----------------------------------|
| <b>Passenger Car Tyres</b> |     |                          |                                  |
| <b>60 series</b>           |     |                          |                                  |
| 185/60 R 14                | 82  | 525                      | 2,7                              |
| 185/60 R 14 XL             | 86  | 585                      | 3,1                              |
| 195/60 R 14                | 86  | 585                      | 2,7                              |
| 155/60 R 15                | 74  | 410                      | 2,7                              |
| 165/60 R 15                | 77  | 455                      | 2,7                              |
| 165/60 R 15 XL             | 81  | 510                      | 3,1                              |
| 175/60 R 15                | 81  | 510                      | 2,7                              |
| 185/60 R 15                | 84  | 550                      | 2,7                              |
| 185/60 R 15 XL             | 88  | 615                      | 3,1                              |
| 195/60 R 15                | 88  | 615                      | 2,7                              |
| 195/60 R 15 XL             | 92  | 695                      | 3,1                              |
| 205/60 R 15                | 91  | 675                      | 2,7                              |
| 205/60 R 15 XL / Rf.       | 95  | 760                      | 3,1                              |
| 215/60 R 15                | 95  | 760                      | 2,7                              |
| 215/60 R 15 XL             | 98  | 825                      | 3,1                              |
| 225/60 R 15                | 96  | 780                      | 2,7                              |
| 235/60 R 15                | 98  | 825                      | 2,7                              |
| 255/60 R 15                | 102 | 935                      | 2,7                              |
| 275/60 R 15                | 107 | 1070                     | 2,7                              |
| 185/60 R 16                | 86  | 585                      | 2,7                              |
| 195/60 R 16                | 89  | 640                      | 2,7                              |
| 195/60 R 16 XL             | 93  | 715                      | 3,1                              |
| 205/60 R 16                | 92  | 695                      | 2,7                              |
| 205/60 R 16 XL             | 96  | 780                      | 3,1                              |
| 215/60 R 16                | 95  | 760                      | 2,7                              |
| 215/60 R 16 XL / Rf.       | 99  | 855                      | 3,1                              |
| 225/60 R 16                | 98  | 825                      | 2,7                              |
| 225/60 R 16 XL / Rf.       | 102 | 935                      | 3,1                              |
| 235/60 R 16                | 100 | 880                      | 2,7                              |
| 235/60 R 16 XL / Rf.       | 104 | 990                      | 3,1                              |
| 205/60 R 17                | 93  | 715                      | 2,7                              |
| 205/60 R 17 XL             | 97  | 805                      | 3,1                              |
| 215/60 R 17                | 96  | 780                      | 2,7                              |
| 215/60 R 17 XL             | 100 | 880                      | 3,1                              |
| 225/60 R 17                | 99  | 855                      | 2,7                              |
| 225/60 R 17 XL             | 103 | 965                      | 3,1                              |
| 235/60 R 17                | 102 | 935                      | 2,7                              |
| 235/60 R 17 XL             | 106 | 1045                     | 3,1                              |
| 255/60 R 17                | 106 | 1045                     | 2,7                              |
| 275/60 R 17                | 110 | 1165                     | 2,7                              |
| 175/60 R 18                | 85  | 565                      | 2,7                              |
| <b>Passenger Car Tyres</b> |     |                          |                                  |
| <b>60 series</b>           |     |                          |                                  |
| 195/60 R 18 XL             | 96  | 780                      | 3,1                              |
| 215/60 R 18 XL             | 98  | 825                      | 3,1                              |
| P 225/60 R 18              | 99  | 855                      | 2,7                              |
| 225/60 R 18                | 100 | 880                      | 2,7                              |
| 225/60 R 18 XL             | 104 | 990                      | 3,1                              |
| 235/60 R 18                | 103 | 965                      | 2,7                              |
| 235/60 R 18 XL             | 107 | 1070                     | 3,1                              |
| P 245/60 R 18              | 104 | 990                      | 2,7                              |
| 245/60 R 18                | 105 | 1020                     | 2,7                              |
| 255/60 R 18                | 108 | 1100                     | 2,7                              |
| 255/60 R 18 XL             | 112 | 1230                     | 3,1                              |
| 265/60 R 18                | 110 | 1165                     | 2,7                              |
| 265/60 R 18 XL             | 114 | 1300                     | 3,1                              |
| 275/60 R 18                | 113 | 1265                     | 2,7                              |
| 285/60 R 18                | 116 | 1375                     | 2,7                              |
| 175/60 R 19                | 86  | 585                      | 2,7                              |
| 255/60 R 19                | 109 | 1135                     | 2,7                              |
| 255/60 R 19 XL             | 113 | 1265                     | 3,1                              |
| 155/60 R 20                | 80  | 495                      | 2,7                              |
| 235/60 R 20 XL             | 108 | 1100                     | 3,1                              |
| 245/60 R 20                | 107 | 1070                     | 2,7                              |
| 255/60 R 20 XL             | 113 | 1265                     | 3,1                              |
| 275/60 R 20                | 115 | 1335                     | 2,7                              |
| 275/60 R 20 XL             | 119 | 1495                     | 3,1                              |
| <b>55 series</b>           |     |                          |                                  |
| 195/55 R 13                | 80  | 495                      | 2,7                              |
| 185/55 R 14                | 80  | 495                      | 2,7                              |
| 175/55 R 15                | 77  | 455                      | 2,7                              |
| 185/55 R 15                | 82  | 525                      | 2,7                              |
| 185/55 R 15 XL / Rf.       | 86  | 585                      | 3,1                              |
| 195/55 R 15                | 85  | 565                      | 2,7                              |
| 195/55 R 15 XL / Rf.       | 89  | 640                      | 3,1                              |
| 205/55 R 15                | 88  | 615                      | 2,7                              |
| 225/55 R 15                | 92  | 695                      | 2,7                              |
| 185/55 R 16                | 83  | 535                      | 2,7                              |
| 185/55 R 16 XL             | 87  | 600                      | 3,1                              |
| 195/55 R 16                | 87  | 600                      | 2,7                              |
| 195/55 R 16 XL             | 91  | 675                      | 3,1                              |
| 205/55 R 16                | 91  | 675                      | 2,7                              |
| 205/55 R 16 XL             | 94  | 735                      | 3,1                              |
| 215/55 R 16                | 93  | 715                      | 2,7                              |

Increased load capacity of tyres on caravans and lightweight trailers (only applies to trailers with a max. speed of 100 km/h or 62 mph entered in the car registration documents).

| Tyre size                  | LI  | Max. Load capacity<br>kg | Max. Inflation pressure<br>(bar) |
|----------------------------|-----|--------------------------|----------------------------------|
| <b>Passenger Car Tyres</b> |     |                          |                                  |
| <b>55 series</b>           |     |                          |                                  |
| 215/55 R 16 Rf.            | 95  | 760                      | 3,1                              |
| 215/55 R 16 XL             | 97  | 805                      | 3,1                              |
| 225/55 R 16                | 95  | 760                      | 2,7                              |
| 225/55 R 16 XL             | 99  | 855                      | 3,1                              |
| 255/55 R 16                | 103 | 965                      | 2,7                              |
| 195/55 R 17                | 88  | 615                      | 2,7                              |
| 205/55 R 17                | 91  | 675                      | 2,7                              |
| 205/55 R 17 XL             | 95  | 760                      | 3,1                              |
| 215/55 R 17                | 94  | 735                      | 2,7                              |
| 215/55 R 17 XL             | 98  | 825                      | 3,1                              |
| 225/55 R 17                | 97  | 805                      | 2,7                              |
| 225/55 R 17 XL / Rf.       | 101 | 910                      | 3,1                              |
| 235/55 R 17                | 99  | 855                      | 2,7                              |
| 235/55 R 17 XL / Rf.       | 103 | 965                      | 3,1                              |
| 245/55 R 17                | 102 | 935                      | 2,7                              |
| 255/55 R 17                | 104 | 990                      | 2,7                              |
| 275/55 R 17                | 109 | 1135                     | 2,7                              |
| 205/55 R 18 XL             | 96  | 780                      | 3,1                              |
| 215/55 R 18                | 95  | 760                      | 2,7                              |
| 215/55 R 18 XL             | 99  | 855                      | 3,1                              |
| 225/55 R 18                | 98  | 825                      | 2,7                              |
| 225/55 R 18 XL             | 102 | 935                      | 3,1                              |
| 235/55 R 18                | 100 | 880                      | 2,7                              |
| 235/55 R 18 XL             | 104 | 990                      | 3,1                              |
| 245/55 R 18 XL             | 107 | 1070                     | 3,1                              |
| 255/55 R 18                | 105 | 1020                     | 2,7                              |
| 255/55 R 18 XL             | 109 | 1135                     | 3,1                              |
| 195/55 R 19 XL             | 94  | 735                      | 3,1                              |
| 205/55 R 19 XL             | 97  | 805                      | 3,1                              |
| 225/55 R 19                | 99  | 855                      | 2,7                              |
| 225/55 R 19 XL             | 103 | 965                      | 3,1                              |
| 235/55 R 19                | 101 | 910                      | 2,7                              |
| 235/55 R 19 XL             | 105 | 1020                     | 3,1                              |
| 245/55 R 19                | 103 | 965                      | 2,7                              |
| 255/55 R 19                | 107 | 1070                     | 2,7                              |
| 255/55 R 19 XL             | 111 | 1200                     | 3,1                              |
| 265/55 R 19                | 109 | 1135                     | 2,7                              |
| 265/55 R 19 XL             | 113 | 1265                     | 3,1                              |
| 275/55 R 19                | 111 | 1200                     | 2,7                              |
| 175/55 R 20                | 85  | 565                      | 2,7                              |
| 195/55 R 20 XL             | 95  | 760                      | 3,1                              |
| <b>Passenger Car Tyres</b> |     |                          |                                  |
| <b>55 series</b>           |     |                          |                                  |
| 235/55 R 20                | 102 | 935                      | 2,7                              |
| 235/55 R 20 XL             | 105 | 1020                     | 3,1                              |
| 255/55 R 20                | 107 | 1070                     | 2,7                              |
| 255/55 R 20 XL             | 110 | 1165                     | 3,1                              |
| 275/55 R 20 XL             | 117 | 1415                     | 3,1                              |
| <b>50 series</b>           |     |                          |                                  |
| 175/50 R 13                | 72  | 390                      | 2,7                              |
| 185/50 R 14                | 77  | 455                      | 2,7                              |
| 165/50 R 15                | 72  | 390                      | 2,7                              |
| 195/50 R 15                | 82  | 525                      | 2,7                              |
| 195/50 R 15 XL             | 86  | 585                      | 3,1                              |
| 205/50 R 15                | 86  | 585                      | 2,7                              |
| 185/50 R 16                | 81  | 510                      | 2,7                              |
| 195/50 R 16                | 84  | 550                      | 2,7                              |
| 195/50 R 16 XL             | 88  | 615                      | 3,1                              |
| 205/50 R 16                | 87  | 600                      | 2,7                              |
| 225/50 R 16                | 92  | 695                      | 2,7                              |
|                            | 93  | 715                      | 2,7                              |
| 205/50 R 17                | 89  | 640                      | 2,7                              |
| 205/50 R 17 XL             | 93  | 715                      | 3,1                              |
| 215/50 R 17                | 91  | 675                      | 2,7                              |
| 215/50 R 17 XL             | 95  | 760                      | 3,1                              |
| 225/50 R 17                | 94  | 735                      | 2,7                              |
| 225/50 R 17 XL             | 98  | 825                      | 3,1                              |
| 235/50 R 17                | 96  | 780                      | 2,7                              |
| 235/50 R 17 XL             | 100 | 880                      | 3,1                              |
| 245/50 R 17                | 99  | 855                      | 2,7                              |
| 215/50 R 18                | 92  | 695                      | 2,7                              |
| 215/50 R 18 XL             | 96  | 780                      | 3,1                              |
| 225/50 R 18                | 95  | 760                      | 2,7                              |
| 225/50 R 18 XL             | 99  | 855                      | 3,1                              |
| 235/50 R 18                | 97  | 805                      | 2,7                              |
| 235/50 R 18 XL             | 101 | 910                      | 3,1                              |
| 245/50 R 18                | 100 | 880                      | 2,7                              |
| 245/50 R 18 XL             | 104 | 990                      | 3,1                              |
| 285/50 R 18                | 109 | 1135                     | 2,7                              |
| 205/50 R 19 XL             | 94  | 735                      | 3,1                              |
| 215/50 R 19 XL             | 93  | 715                      | 3,1                              |
| 225/50 R 19 XL             | 100 | 880                      | 3,1                              |
| 235/50 R 19                | 99  | 855                      | 2,7                              |
| 235/50 R 19 XL             | 103 | 965                      | 3,1                              |

Increased load capacity of tyres on caravans and lightweight trailers (only applies to trailers with a max. speed of 100 km/h or 62 mph entered in the car registration documents).

| Tyre size                  | LI  | Max. Load capacity<br>kg | Max. Inflation pressure<br>(bar) |
|----------------------------|-----|--------------------------|----------------------------------|
| <b>Passenger Car Tyres</b> |     |                          |                                  |
| <b>50 series</b>           |     |                          |                                  |
| 245/50 R 19                | 100 | 880                      | 2,7                              |
|                            | 101 | 910                      | 2,7                              |
| 245/50 R 19 XL             | 105 | 1020                     | 3,1                              |
| 255/50 R 19                | 103 | 965                      | 2,7                              |
| 255/50 R 19 XL             | 107 | 1070                     | 3,1                              |
| 265/50 R 19                | 106 | 1045                     | 2,7                              |
| 265/50 R 19 XL             | 110 | 1165                     | 3,1                              |
| 275/50 R 19 XL             | 112 | 1230                     | 3,1                              |
| 235/50 R 20                | 100 | 880                      | 2,7                              |
| 245/50 R 20                | 102 | 935                      | 2,7                              |
| 245/50 R 20 XL             | 105 | 1020                     | 3,1                              |
| 255/50 R 20                | 105 | 1020                     | 2,7                              |
| 255/50 R 20 XL             | 109 | 1135                     | 3,1                              |
| 265/50 R 20 XL             | 111 | 1200                     | 3,1                              |
| 275/50 R 20                | 109 | 1135                     | 2,7                              |
| 275/50 R 20 XL             | 113 | 1265                     | 3,1                              |
| 285/50 R 20                | 112 | 1230                     | 2,7                              |
| 285/50 R 20 XL             | 116 | 1375                     | 3,1                              |
| 295/50 R 20 XL             | 118 | 1450                     | 3,1                              |
| 305/50 R 20 XL             | 120 | 1540                     | 3,1                              |
| 255/50 R 21 XL             | 109 | 1135                     | 3,1                              |
| 275/50 R 21 XL             | 113 | 1265                     | 3,1                              |
| <b>45 series</b>           |     |                          |                                  |
| 195/45 R 13                | 75  | 425                      | 2,7                              |
| 195/45 R 14                | 77  | 455                      | 2,7                              |
| 195/45 R 15                | 78  | 470                      | 2,7                              |
| 195/45 R 16                | 80  | 495                      | 2,7                              |
| 195/45 R 16 XL             | 84  | 550                      | 3,1                              |
| 205/45 R 16                | 83  | 535                      | 2,7                              |
| 205/45 R 16 XL             | 87  | 600                      | 3,1                              |
| 215/45 R 16                | 86  | 585                      | 2,7                              |
| 215/45 R 16 XL             | 90  | 660                      | 3,1                              |
| 225/45 R 16                | 89  | 640                      | 2,7                              |
| 245/45 R 16                | 94  | 735                      | 2,7                              |
| 195/45 R 17                | 81  | 510                      | 2,7                              |
| 205/45 R 17                | 84  | 550                      | 2,7                              |
| 205/45 R 17 XL             | 88  | 615                      | 3,1                              |
| 215/45 R 17                | 87  | 600                      | 2,7                              |
| 215/45 R 17 XL             | 91  | 675                      | 3,1                              |
| 225/45 R 17                | 91  | 675                      | 2,7                              |
| 225/45 R 17 XL / Rf.       | 94  | 735                      | 3,1                              |

Increased load capacity of tyres on caravans and lightweight trailers (only applies to trailers with a max. speed of 100 km/h or 62 mph entered in the car registration documents).

| Tyre size                  | LI  | Max. Load capacity<br>kg | Max. Inflation pressure<br>(bar) |
|----------------------------|-----|--------------------------|----------------------------------|
| <b>Passenger Car Tyres</b> |     |                          |                                  |
| <b>45 series</b>           |     |                          |                                  |
| 295/45 R 20 XL             | 114 | 1300                     | 3,1                              |
| 245/45 R 21 XL             | 104 | 990                      | 3,1                              |
| 255/45 R 21 XL             | 105 | 1020                     | 3,1                              |
| 265/45 R 21 XL             | 108 | 1100                     | 3,1                              |
| 275/45 R 21                | 107 | 1070                     | 2,7                              |
| 275/45 R 21 XL             | 110 | 1165                     | 3,1                              |
| 285/45 R 21                | 109 | 1135                     | 2,7                              |
| 285/45 R 21 XL             | 113 | 1265                     | 3,1                              |
| 315/45 R 21                | 116 | 1375                     | 2,7                              |
| 255/45 R 22 XL             | 107 | 1070                     | 3,1                              |
| 275/45 R 22 XL             | 112 | 1230                     | 3,1                              |
| 285/45 R 22 XL             | 114 | 1300                     | 3,1                              |
| 305/45 R 22 XL             | 118 | 1450                     | 3,1                              |
| <b>40 series</b>           |     |                          |                                  |
| 195/40 R 14                | 73  | 400                      | 2,7                              |
| 195/40 R 16 XL             | 80  | 495                      | 3,1                              |
| 215/40 R 16 XL             | 86  | 585                      | 3,1                              |
| 225/40 R 16                | 85  | 565                      | 2,7                              |
| 195/40 R 17 XL             | 81  | 510                      | 3,1                              |
| 205/40 R 17 XL             | 84  | 550                      | 3,1                              |
| 215/40 R 17                | 83  | 535                      | 2,7                              |
| 215/40 R 17 XL             | 87  | 600                      | 3,1                              |
| 235/40 R 17                | 90  | 660                      | 2,7                              |
| 245/40 R 17                | 91  | 675                      | 2,7                              |
| 245/40 R 17 XL             | 95  | 760                      | 3,1                              |
| 255/40 R 17                | 94  | 735                      | 2,7                              |
| 255/40 R 17 XL             | 98  | 825                      | 3,1                              |
| 205/40 R 18 XL             | 86  | 585                      | 3,1                              |
| 215/40 R 18                | 85  | 565                      | 2,7                              |
| 215/40 R 18 XL             | 89  | 640                      | 3,1                              |
| 225/40 R 18                | 88  | 615                      | 2,7                              |
| 225/40 R 18 XL             | 92  | 695                      | 3,1                              |
| 235/40 R 18                | 91  | 675                      | 2,7                              |
| 235/40 R 18 XL             | 95  | 760                      | 3,1                              |
| 245/40 R 18                | 93  | 715                      | 2,7                              |
| 245/40 R 18 XL             | 97  | 805                      | 3,1                              |
| 255/40 R 18                | 95  | 760                      | 2,7                              |
| 255/40 R 18 XL             | 99  | 855                      | 3,1                              |
| 265/40 R 18 XL             | 101 | 910                      | 3,1                              |
| 275/40 R 18                | 99  | 855                      | 2,7                              |
| 275/40 R 18 XL             | 103 | 965                      | 3,1                              |

| Tyre size                  | LI  | Max. Load capacity<br>kg | Max. Inflation pressure<br>(bar) |
|----------------------------|-----|--------------------------|----------------------------------|
| <b>Passenger Car Tyres</b> |     |                          |                                  |
| <b>40 series</b>           |     |                          |                                  |
| 225/40 R 19                | 89  | 640                      | 2,7                              |
| 225/40 R 19 XL             | 93  | 715                      | 3,1                              |
| 235/40 R 19                | 92  | 695                      | 2,7                              |
| 235/40 R 19 XL             | 96  | 780                      | 3,1                              |
| HL245/40R 19 XL            | 101 | 910                      | 3,1                              |
| 245/40 R 19                | 94  | 735                      | 2,7                              |
| 245/40 R 19 XL             | 98  | 825                      | 3,1                              |
| 255/40 R 19                | 96  | 780                      | 2,7                              |
| 255/40 R 19 XL             | 100 | 880                      | 3,1                              |
| 265/40 R 19                | 98  | 825                      | 2,7                              |
| 265/40 R 19 XL             | 102 | 935                      | 3,1                              |
| 275/40 R 19                | 101 | 910                      | 2,7                              |
| 275/40 R 19 XL             | 105 | 1020                     | 3,1                              |
| 285/40 R 19                | 103 | 965                      | 2,7                              |
| 285/40 R 19 XL             | 107 | 1075                     | 3,1                              |
| 295/40 R 19 XL             | 108 | 1100                     | 3,1                              |
| 225/40 R 20 XL             | 94  | 735                      | 3,1                              |
| 235/40 R 20 XL             | 96  | 780                      | 3,1                              |
| 245/40 R 20                | 95  | 760                      | 2,7                              |
| 245/40 R 20 XL             | 99  | 855                      | 3,1                              |
| 255/40 R 20                | 97  | 805                      | 2,7                              |
| 255/40 R 20 XL             | 101 | 910                      | 3,1                              |
| 265/40 R 20 XL             | 104 | 990                      | 3,1                              |
| 275/40 R 20 XL             | 106 | 1045                     | 3,1                              |
| 285/40 R 20                | 104 | 990                      | 2,7                              |
| 285/40 R 20 XL             | 108 | 1100                     | 3,1                              |
| 295/40 R 20 XL             | 110 | 1165                     | 3,1                              |
| 305/40 R 20 XL             | 112 | 1230                     | 3,1                              |
| 245/40 R 21 XL             | 100 | 880                      | 3,1                              |
| 255/40 R 21 XL             | 102 | 935                      | 3,1                              |
| 265/40 R 21                | 101 | 910                      | 2,7                              |
| 265/40 R 21 XL             | 105 | 1020                     | 3,1                              |
| 275/40 R 21 XL             | 107 | 1075                     | 3,1                              |
| 285/40 R 21 XL             | 109 | 1135                     | 3,1                              |
| 295/40 R 21 XL             | 111 | 1200                     | 3,1                              |
| 315/40 R 21                | 111 | 1200                     | 2,7                              |
| 315/40 R 21 XL             | 115 | 1335                     | 3,1                              |
| 325/40 R 21                | 113 | 1265                     | 2,7                              |
| 255/40 R 22 XL             | 103 | 965                      | 3,1                              |
| 265/40 R 22 XL             | 106 | 1045                     | 3,1                              |
| 275/40 R 22 XL             | 107 | 1070                     | 3,1                              |

Increased load capacity of tyres on caravans and lightweight trailers (only applies to trailers with a max. speed of 100 km/h or 62 mph entered in the car registration documents).

| Tyre size                  | LI  | Max. Load capacity<br>kg | Max. Inflation pressure<br>(bar) |
|----------------------------|-----|--------------------------|----------------------------------|
| <b>Passenger Car Tyres</b> |     |                          |                                  |
| <b>40 series</b>           |     |                          |                                  |
| 275/40 R 22 XL             | 108 | 1100                     | 3,1                              |
| 285/40 R 22                | 106 | 1045                     | 2,7                              |
| 285/40 R 22 XL             | 110 | 1165                     | 3,1                              |
| 305/40 R 22 XL             | 114 | 1300                     | 3,1                              |
| 325/40 R 22                | 114 | 1300                     | 2,7                              |
| 285/40 R 23 XL             | 111 | 1200                     | 3,1                              |
| 305/40 R 23 XL             | 115 | 1335                     | 3,1                              |
| 285/40 R 24 XL             | 112 | 1230                     | 3,1                              |
| 305/40 R 24 XL             | 117 | 1415                     | 3,1                              |
| <b>35 series</b>           |     |                          |                                  |
| 215/35 R 17 XL             | 83  | 535                      | 3,1                              |
| 245/35 R 17                | 87  | 600                      | 2,7                              |
| 215/35 R 18 XL             | 84  | 550                      | 3,1                              |
| 225/35 R 18 XL             | 87  | 600                      | 3,1                              |
| 245/35 R 18                | 88  | 615                      | 2,7                              |
| 245/35 R 18 XL             | 92  | 695                      | 3,1                              |
| 255/35 R 18                | 90  | 660                      | 2,7                              |
| 255/35 R 18 XL             | 94  | 735                      | 3,1                              |
| 265/35 R 18                | 93  | 715                      | 2,7                              |
| 265/35 R 18 XL             | 97  | 805                      | 3,1                              |
| 275/35 R 18                | 95  | 760                      | 2,7                              |
| 275/35 R 18 XL             | 99  | 855                      | 3,1                              |
| 285/35 R 18                | 97  | 805                      | 2,7                              |
| 285/35 R 18 XL             | 101 | 910                      | 3,1                              |
| 215/35 R 19 XL             | 85  | 565                      | 3,1                              |
| 225/35 R 19 XL             | 88  | 615                      | 3,1                              |
| 235/35 R 19                | 87  | 600                      | 2,7                              |
| 235/35 R 19 XL             | 91  | 675                      | 3,1                              |
| 245/35 R 19 XL             | 93  | 715                      | 3,1                              |
| 255/35 R 19                | 92  | 695                      | 2,7                              |
| 255/35 R 19 XL             | 96  | 780                      | 3,1                              |
| 265/35 R 19                | 94  | 735                      | 2,7                              |
| 265/35 R 19 XL             | 98  | 825                      | 3,1                              |
| 275/35 R 19 XL             | 100 | 880                      | 3,1                              |
| 285/35 R 19                | 99  | 855                      | 2,7                              |
| 285/35 R 19 XL             | 103 | 965                      | 3,1                              |
| 295/35 R 19                | 100 | 880                      | 2,7                              |
| 295/35 R 19 XL             | 104 | 990                      | 3,1                              |
| 225/35 R 20 XL             | 90  | 660                      | 3,1                              |
| 235/35 R 20                | 88  | 615                      | 2,7                              |
| 235/35 R 20 XL             | 92  | 695                      | 3,1                              |
| <b>30 series</b>           |     |                          |                                  |
| 255/30 R 18 XL             | 90  | 660                      | 3,1                              |
| 285/30 R 18                | 93  | 715                      | 2,7                              |
| 295/30 R 18                | 94  | 735                      | 2,7                              |
| 295/30 R 18 XL             | 98  | 825                      | 3,1                              |
| 245/30 R 19 XL             | 89  | 640                      | 3,1                              |
| 255/30 R 19 XL             | 91  | 675                      | 3,1                              |
| 265/30 R 19 XL             | 93  | 715                      | 3,1                              |

Increased load capacity of tyres on caravans and lightweight trailers (only applies to trailers with a max. speed of 100 km/h or 62 mph entered in the car registration documents).

| Tyre size                  | LI  | Max. Load capacity<br>kg | Max. Inflation pressure<br>(bar) |
|----------------------------|-----|--------------------------|----------------------------------|
| <b>Passenger Car Tyres</b> |     |                          |                                  |
| <b>30 series</b>           |     |                          |                                  |
| 275/30 R 19 XL             | 96  | 780                      | 3,1                              |
| 285/30 R 19 XL             | 98  | 825                      | 3,1                              |
| 295/30 R 19                | 96  | 780                      | 2,7                              |
| 295/30 R 19 XL             | 100 | 880                      | 3,1                              |
| 305/30 R 19 XL             | 102 | 935                      | 3,1                              |
| 325/30 R 19 XL             | 105 | 1020                     | 3,1                              |
| 225/30 R 20 XL             | 85  | 565                      | 3,1                              |
| 235/30 R 20 XL             | 88  | 615                      | 3,1                              |
| 245/30 R 20 XL             | 90  | 660                      | 3,1                              |
| 255/30 R 20 XL             | 92  | 695                      | 3,1                              |
| 265/30 R 20 XL             | 94  | 735                      | 3,1                              |
| 275/30 R 20 XL             | 97  | 805                      | 3,1                              |
| 285/30 R 20 XL             | 99  | 855                      | 3,1                              |
| 295/30 R 20 XL             | 101 | 910                      | 3,1                              |
| 305/30 R 20 XL             | 103 | 965                      | 3,1                              |
| 325/30 R 20 XL             | 106 | 1045                     | 3,1                              |
| 335/30 R 20 XL             | 108 | 1100                     | 3,1                              |
| 245/30 R 21 XL             | 91  | 675                      | 3,1                              |
| 255/30 R 21 XL             | 93  | 715                      | 3,1                              |
| 265/30 R 21 XL             | 96  | 780                      | 3,1                              |
| 275/30 R 21 XL             | 98  | 825                      | 3,1                              |
| 285/30 R 21 XL             | 100 | 880                      | 3,1                              |
| 295/30 R 21 XL             | 102 | 935                      | 3,1                              |
| 305/30 R 21                | 100 | 800                      | 2,7                              |
| 315/30 R 21 XL             | 105 | 1020                     | 3,1                              |
| 325/30 R 21 XL             | 108 | 1100                     | 3,1                              |
| 255/30 R 22 XL             | 95  | 760                      | 3,1                              |
| 265/30 R 22 XL             | 97  | 805                      | 3,1                              |
| 285/30 R 22 XL             | 101 | 910                      | 3,1                              |
| 295/30 R 22 XL             | 103 | 965                      | 3,1                              |
| 315/30 R 22 XL             | 107 | 1070                     | 3,1                              |
| 305/30 R 23 XL             | 105 | 1020                     | 3,1                              |
| 335/30 R 23 XL             | 111 | 1200                     | 3,1                              |
| 295/30 R 24 HL             | 108 | 1100                     | 3,1                              |
| 335/30 R 24 XL             | 112 | 1230                     | 3,1                              |
| <b>25 series</b>           |     |                          |                                  |
| 315/25 R 19 XL             | 98  | 825                      | 3,1                              |
| 285/25 R 20 XL             | 93  | 715                      | 3,1                              |
| 295/25 R 20 XL             | 95  | 760                      | 3,1                              |
| 305/25 R 20 XL             | 97  | 805                      | 3,1                              |
| 325/25 R 20 XL             | 101 | 910                      | 3,1                              |

**Increased load capacity of tyres on caravans and lightweight trailers (only applies to trailers with a max. speed of 100 km/h or 62 mph entered in the car registration documents).**

| Tyre size                               | PR | LI  | Max <sup>**) Load capacity kg</sup> | Max. Inflation pressure (bar) |
|-----------------------------------------|----|-----|-------------------------------------|-------------------------------|
| <b>Commercial-C-tyres <sup>*)</sup></b> |    |     |                                     |                               |
| <b>13 inch</b>                          |    |     |                                     |                               |
| 165 R 13 C                              | 6  | 91  | 645                                 | 4,0                           |
| 165/70 R 13 C                           | 6  | 88  | 590                                 | 4,0                           |
| <b>14 inch</b>                          |    |     |                                     |                               |
| 175 R 14 C                              | 8  | 99  | 815                                 | 4,8                           |
| 185 R 14 C                              | 6  | 99  | 815                                 | 4,0                           |
|                                         | 8  | 102 | 895                                 | 4,8                           |
| 195 R 14 C                              | 8  | 106 | 1000                                | 4,8                           |
| 205 R 14 C                              | 8  | 109 | 1080                                | 4,8                           |
| 215 R 14 C                              | 8  | 112 | 1175                                | 4,8                           |
| 165/75 R 14 C                           | 8  | 97  | 765                                 | 5,0                           |
| 185/75 R 14 C                           | 8  | 102 | 895                                 | 5,0                           |
| 195/75 R 14 C                           | 8  | 106 | 1000                                | 5,0                           |
| 165/70 R 14 C                           | 6  | 89  | 610                                 | 4,0                           |
| 175/70 R 14 C                           | 6  | 95  | 725                                 | 4,0                           |
| 195/70 R 14 C                           | 8  | 101 | 865                                 | 5,0                           |
| 175/65 R 14 C                           | 6  | 90  | 630                                 | 4,0                           |
| <b>15 inch</b>                          |    |     |                                     |                               |
| 185 R 15 C                              | 8  | 103 | 920                                 | 4,8                           |
| 195 R 15 C                              | 8  | 106 | 1000                                | 4,8                           |
| 215/80 R 15 C                           | 8  | 111 | 1145                                | 5,0                           |
| 245/75 R 15 C                           | 6  | 109 | 1080                                | 4,0                           |
| 195/70 R 15 C                           | 6  | 100 | 840                                 | 4,0                           |
|                                         | 8  | 104 | 945                                 | 4,8                           |
| 205/70 R 15 C                           | 8  | 106 | 1000                                | 4,8                           |
| 215/70 R 15 C                           | 8  | 109 | 1080                                | 4,8                           |
| 225/70 R 15 C                           | 6  | 109 | 1080                                | 4,0                           |
|                                         | 8  | 112 | 1175                                | 4,8                           |
| 205/65 R 15 C                           | 6  | 102 | 895                                 | 4,0                           |
| 215/65 R 15 C                           | 6  | 104 | 945                                 | 4,0                           |
| 185/60 R 15 C                           | 6  | 94  | 705                                 | 4,0                           |
| 185/55 R 15 C                           | 6  | 90  | 630                                 | 4,0                           |
| <b>16 inch</b>                          |    |     |                                     |                               |
| 235/85 R 16 C                           | 8  | 114 | 1240                                | 5,0                           |
|                                         | 10 | 120 | 1470                                | 5,0                           |
| 205 R 16 C                              | 8  | 110 | 1115                                | 4,8                           |
| 175/75 R 16 C                           | 8  | 101 | 865                                 | 5,0                           |
| 185/75 R 16 C                           | 8  | 104 | 945                                 | 5,0                           |

<sup>\*)</sup> 14, 15 and small 16 to 18 inch C tyres with treads like pass. car tyres for service on delivery vans.

For other C tyres, see Technical Databook for truck tyres.

<sup>\*\*) also for C tyres: Load capacity per tyre (single fitment).</sup>

The rim is the part of the wheel which supports the tyre.

### 1. Important elements of the rim

Rim flange = lateral support for the tyre bead

Flange distance = clear rim width

Bead seat = base on which the tyre bead is seated

Well = inner side of the rim

Diameter = specified diameter flange / bead seat

Hump = continuous raised section of the rim bead seat which enables a better fitting of tubeless tyre beads at **low pressure<sup>\*)</sup>**.

### 2. Types of rims

The well-base rim is virtually the only type of rim used on cars, caravans and other car trailers:

**Well-base rims** = one-piece rims, deepened well for easier tyre fitting, 5 °tapered bead seat, “x” in the wheel size designation.

Virtually only J and B versions of the well-base rim are used and these are explained here in more detail.

If rubber valves (snap-in type) are used on rims for higher speeds, these must be fitted with **valve supports** where necessary.

Also refer to the section “Fitting the tyre”.

<sup>\*)</sup> Safety shoulders (e. g. hump) are prescribed for tubeless radial car tyres. They should also be used for tubeless light truck C tyres with a 14 to 18 inch code for the rim diameter.

### 3. Wheel disc (nave)

The wheel disc is the linking element between the rim and the axle hub. Of all the measurements for wheel linking elements – centre bore and bore diameter, bolt hole type and **offset depth** – the latter is a particularly important factor for the free movement of the tyre in any wheel position.

(Offset depth = 0, when the rim centre and hub contact area of the wheel disc are in line).

### 4. Wheel strength

The wheel manufacturer must confirm that the wheel strength is adequate for each particular application.


### 5. Lateral and true running of the wheels (without tyres)

On cars which are virtually all able to considerably exceed 100 km/h (62 mph), it is particularly important that the wheels of the vehicle are **well-centred**.

There should be as little radial and lateral run-out as possible on both bead seat / flange sides of the rim, in order to achieve **good smooth running**.

The standard shows max. tolerances of 1.20 mm. This dimension is for the centre of the tyre seat area or the centre of the flange height. All measurements, particularly the **uniformity**, should be well within these tolerances.

R<sub>4</sub> and R<sub>5</sub>: between 4 and 10 mm  
R<sub>5</sub>: not larger than 10 mm  
Valve Hole-Ø:  
11.5 mm (11.3<sub>-0</sub><sup>+0.4</sup> centrally in the side of the rim well.  
16.0 mm (15.7 mm<sub>-0</sub><sup>+0.4</sup>) only with Ø-Code 15.

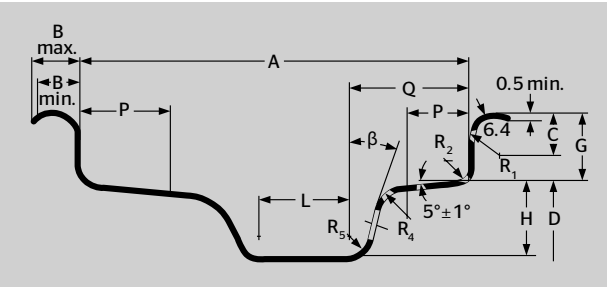



| Rim Contour | Dimensions (mm) |       |                    |       |      |                    |      |      |                |                |      |
|-------------|-----------------|-------|--------------------|-------|------|--------------------|------|------|----------------|----------------|------|
|             | A               | B     |                    | G     | P    | H                  | L    | Q    | R <sub>1</sub> | R <sub>2</sub> | β    |
|             |                 | Min.  | Max. <sup>1)</sup> | ± 0,6 | Min. | Min. <sup>2)</sup> | Min. | Max. | Min.           | Max.           | Min. |
| 3.00 B      | 76              | ± 1   | 10                 | 13    | 14.1 | 15                 | 16   | 28   | 7.5            | 4.5            | 10°  |
| 3.50 B      | 89              |       |                    |       |      |                    |      |      |                |                |      |
| 4.00 B      | 101.5           |       |                    |       |      |                    |      |      |                |                |      |
| 4.50 B      | 114.5           |       |                    |       |      |                    |      |      |                |                |      |
| 5.00 B      | 127             |       |                    |       |      |                    |      |      |                |                |      |
| 5.50 B      | 139.5           |       |                    |       |      |                    |      |      |                |                |      |
| 6.00 B      | 152.5           |       |                    |       |      |                    |      |      |                |                |      |
| 3 J         | 76              | ± 1.5 | 11                 | 15    | 17.3 | 17.3               | 16   | 28   | 9.5            | 6.5            | 20°  |
| 3 ½ J       | 89              |       |                    |       |      |                    |      |      |                |                |      |
| 4 J         | 101.5           |       |                    |       |      |                    |      |      |                |                |      |
| 4 ½ J       | 114.5           |       |                    |       |      |                    |      |      |                |                |      |
| 5 J         | 127             |       |                    |       |      |                    |      |      |                |                |      |
| 5 ½ J       | 139.5           |       |                    |       |      |                    |      |      |                |                |      |
| 6 J         | 152.5           |       |                    |       |      |                    |      |      |                |                |      |
| 6 ½ J       | 165             |       |                    |       |      |                    |      |      |                |                |      |
| 7 J         | 178             |       |                    |       |      |                    |      |      |                |                |      |
| 7 ½ J       | 190.5           |       |                    |       |      |                    |      |      |                |                |      |
| 8 J         | 203             |       |                    |       |      |                    |      |      |                |                |      |
| 8 ½ J       | 216             |       |                    |       |      |                    |      |      |                |                |      |
| 9 J         | 228.5           |       |                    |       |      |                    |      |      |                |                |      |
| 9 ½ J       | 241.5           |       |                    |       |      |                    |      |      |                |                |      |
| 10 J        | 254             |       |                    |       |      |                    |      |      |                |                |      |
| 10 ½ J      | 266.5           |       |                    |       |      |                    |      |      |                |                |      |
| 11 J        | 279.5           |       |                    |       |      |                    |      |      |                |                |      |
| 11 ½ J      | 292             |       |                    |       |      |                    |      |      |                |                |      |
| 12 J        | 305             |       |                    |       |      |                    |      |      |                |                |      |
| 12 ½ J      | 317.5           |       |                    |       |      |                    |      |      |                |                |      |
| 13 J        | 330             |       |                    |       |      |                    |      |      |                |                |      |

<sup>1)</sup> B max. values may be exceeded on rims for light commercial vehicles  
<sup>2)</sup> Minimum dimensions for well depth (H) and well angle are required for tyre mounting

| Rim diameter |       |       |       |       |       |       |       |       |       |       |       |       |       |
|--------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| Code (inch)  | 12    | 13    | 14    | 15    | 16    | 17    | 18    | 19    | 20    | 21    | 22    | 23    | 24    |
| D (mm)       | 304.0 | 329.4 | 354.8 | 380.2 | 405.6 | 436.6 | 462.0 | 487.4 | 512.8 | 538.2 | 563.6 | 589.0 | 614.4 |

Special rim designs for passenger cars


In many countries safety rims must be used for tubeless radial tyres.

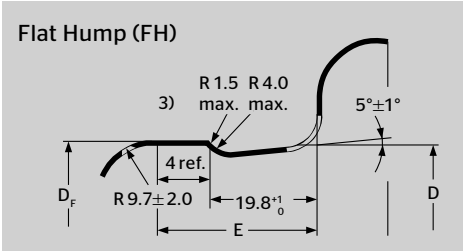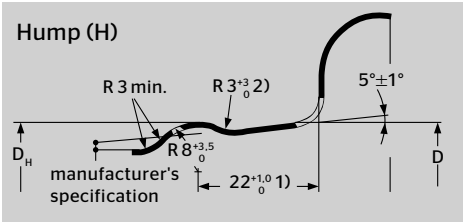


<sup>1)</sup> In most car rims 19.8 mm.  
<sup>2)</sup> For B-Rims R = 8.5 mm max. resp. R = 4 ±1 mm.  
<sup>3)</sup> Deburred.

These full-drop centre rims with safety shoulders for cars, estate cars and light trucks are marked with the following-codes shown after rim size designation:


- H** = one-sided round hump on outer shoulder (formerly: H 1)
- H2** = double round hump
- FH** = flat hump on outer shoulder (formerly: FHA 1)
- FH2** = double flat hump (formerly: FHA 2)
- CH** = combination hump = flat hump on outer shoulder, round hump on inner shoulder (formerly: FHA-H)
- SL** = special ledge
- EH2/2+** = Extended Hump (with extended hump on both sides) (see following page)

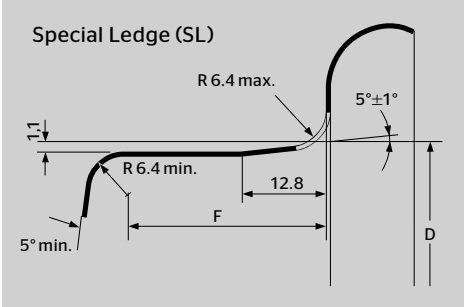

| Ledge | Rim diameter Code (inch) | Dimensions (mm)                            |                                            |        |
|-------|--------------------------|--------------------------------------------|--------------------------------------------|--------|
|       |                          | H                                          | FH                                         |        |
|       |                          | Circumference TT · D <sub>H</sub> (+ 0/-3) | Circumference TT · D <sub>F</sub> (+ 0/-3) | E Max. |
| B     | 12                       | 957.6                                      | -                                          | -      |
|       | 13                       | 1037.0                                     | 1034.8                                     | 24.5   |
|       | 14                       | 1116.8                                     | 1114.6                                     |        |
| J     | 13                       | 1037.0                                     | 1034.8                                     | 28.5   |
|       | 14                       | 1116.8                                     | 1114.6                                     |        |
|       | 15                       | 1196.6                                     | 1194.4                                     |        |
|       | 16                       | 1276.4                                     | 1274.2                                     |        |
|       | 17                       | 1373.8                                     | 1371.6                                     |        |
|       | 18                       | 1453.6                                     | 1451.4                                     |        |
|       | 19                       | 1533.4                                     | 1531.2                                     |        |
|       | 20                       | 1613.2                                     | 1611.0                                     |        |
|       | 21                       | 1693.0                                     | 1690.8                                     |        |
|       | 22                       | 1772.8                                     | 1770.6                                     |        |
|       | 23                       | 1852.6                                     | 1850.4                                     |        |
|       | 24                       | 1932.4                                     | 1930.2                                     |        |



This contour is valid for rim sizes from 5 ½ J to 13 ½ J  
(1): H ≥ 22 necessary for automatic fitting two beads at once



Extended Hump circumference

| Rim diameter<br>Code (inch) | Extended Hump<br>circumference (mm)<br>$\pi \cdot D_{EH}$ (+ 0/-3) |
|-----------------------------|--------------------------------------------------------------------|
| 15                          | 1204.2                                                             |
| 16                          | 1284.0                                                             |
| 17                          | 1381.2                                                             |
| 18                          | 1461.0                                                             |
| 19                          | 1540.8                                                             |
| 20                          | 1620.6                                                             |
| 21                          | 1700.4                                                             |



A combination of summer and winter tyres on passenger cars is not recommended.

Winter tyres have to meet special requirements. **The suitability for winter use significantly depends on the tyres' tread depth.** The legal minimum tread depth is 1,6 mm. Continental recommends to check the tyres regularly, to reduce speed on wet roads and to consider replacing the tyres in good time.

Top safety in winter can be provided only by true winter tyres on all axle positions (4 tyres).



Snowflake designation:

This additional marking on an M + S tyre shows that the tyre meets prescribed test criteria and ensures good winter properties.

## Brittleness temperature of rubber compounds - passenger tyres

**Several performance aspects of tyres are influenced by temperature.**

For example traction (wet and dry), rolling resistance, mileage and ride comfort.

To achieve optimum performance, Continental therefore recommends that winter tyres are used from October to Easter.

All-season tyres are developed to perform all year round. For drivers, living in regions with mild winter conditions (temperatures rarely drop below freezing), all-season tyres can be an alternative.

Continental all-season tyres offer safety and premium performance. In addition, drivers can save cost, time and reduce efforts required for seasonal tyre changes. However, it always has to be remembered that summer and winter tyres are specifically tailored to the relevant conditions.

### Summer tyres - especially Ultra High Performance (UHP) tyres

The highly developed, specialized tread compounds used in such tyres are designed to provide the highest possible levels of grip in summer.

Permanent damage may occur to the tread compounds of such tyres if they are used at temperatures below - 20 °.

At this temperature, the tread compounds of UHP summer tyres may lose their elasticity and become brittle (the so-called brittleness point). When this occurs and the tyre is flexed, the tread compound may crack.

Therefore, UHP summer tyres should not be used at temperatures below - 20 ° C. Continental group tyres with an M + S marking on the sidewall are suitable for use down to - 45 ° C.



### Fitting the tyre

#### SAFETY WARNING!

**If a tyre is not properly fitted it may burst. The energy released in a blow-out can**

**cause fatal injuries so tyres must be fitted by an expert.**

**Only approved fitting tools and lubricants may be used. Observe all fitting instructions.**

**Because of the special technology involved, SSR runflat tyres\*) may be mounted and removed only by specifically trained workshops that have been certified by Continental** (see page 26).

Detailed **mounting instructions** for SSR runflat tyres\*) under [www.contiacademyonline.com/login/index.php?lang=en](http://www.contiacademyonline.com/login/index.php?lang=en)

**ContiSeal and ContiSilent tyres\*\*)** do not differ from standard tyres in aspects such as mounting, demounting, inflating, and balancing. For detailed information see page 26 / 29 and [www.continental-tyres.co.uk/b2c/car/continental-tyre-technologies/contiseal.html](http://www.continental-tyres.co.uk/b2c/car/continental-tyre-technologies/contiseal.html) resp. [www.continental-tyres.co.uk/b2c/car/continental-tyre-technologies/contisilent.html](http://www.continental-tyres.co.uk/b2c/car/continental-tyre-technologies/contisilent.html)

Before the old tyre is taken off the valve insert must be unscrewed and removed to ensure all air has escaped.

**When removing tyres sealed with sealant** (e. g. ContiMobility Kit\*\*)) pay special attention to the following:

The tyre could contain up to ½ litre liquid sealant. Therefore:

- › Wear PE gloves when removing the tyre and make sure that the work area is well ventilated (to prevent odour build-up).
- › Make certain that the tyre is fully deflated before removal.
- › Move the wheel carefully so the sealant can collect at the lowest point in the tyre.
- › Drain all of the sealant before removing the tyre.
- › Dispose of remaining sealant in compliance with national regulations.

The new tyre and rim must have matching diameters and be approved as a combination for the vehicle model concerned. Only rims of the correct size in perfect condition and free of rust should be used. They must not be damaged, out of shape or worn. This applies in particular in combination with SSR runflat tyres \*).

When fitting new tube-type tyres, always use **new tubes**. As tubes stretch in service, there is a risk of folds forming in old tubes, so re-used tubes could suddenly tear.

For safety reasons, tubeless tyres should always be fitted with **new valves**.

If rubber valves (snap-in types) are used for tubeless tyres, the vehicle manufacturer's instructions must be complied with in all cases. A **valve support** (i. e. a stopper on the rim itself or the hubcap) should be fitted, if H, V, W or Y tyres are specified for the vehicle. This ensures that valves are not forced off at high speeds.

Always coat the tyre beads and the rim with a **fitting lubricant** recommended by the tyre manufacturer. This applies in particular to low section tyres and SSR runflat tyres \*). Never use greases or other hydrocarbons for this purpose.

Only use rims according ETRTO or another renowned standard.

While the tyre is being inflated, the wheel must remain firmly secured on the mounting machine. **Never inflate an unsecured tyre.**

\*) only available for tyre brands Continental and Uniroyal

\*\*) only available for tyre brand Continental

Keep a reasonable distance from any tyre that is being inflated. Make use of a sufficiently long and secured extension hose with an integrated pressure gauge. **Never bend over a tyre while it is being inflated.**

When fitting tubeless car tyres, care should be taken to ensure that the tyre beads coming from the well-base first clear the hump in the rim shoulder. To avoid damages to the bead core, the **pop pressure** necessary to push the bead over the hump should not exceed the maximum pressure for seating the beads indicated on the sidewall and in no case 3.3 bar. If the tyre does not pop into place even at this pressure, the pressure must be lowered, and the cause identified and eliminated. Then the procedure can be repeated.

Only when the tyre beads are seated correctly on the rim shoulder may the pressure be increased to achieve the required press-fit and firm grip on the rim flanges. However, this **“fitting pressure”** should not exceed 150 % of the max. pressure given in the tables or be more than 4.0 bar. After this, adjust the pressure to the **operating pressure** specified by the vehicle manufacturer (also see Continental tyre pressure table).

Car tyres should be **dynamically balanced**.

## Fitting the wheel to the vehicle

If the tyres exhibit uneven wear then the axle geometry should be checked and corrected if necessary.

SSR runflat tyres\*) may only be fitted on vehicles for which they are approved by the vehicle manufacturer and that are equipped with a tyre pressure monitoring system.

\*) only available for tyre brands Continental and Uniroyal

Valves should be fitted with **valve caps** – preferably with a sealing ring – as they protect the delicate **valve inserts** and the inside of the tyre.

When mounting **wheel caps and wheel trim rings**, sufficient clearance to the tyre sidewall must be maintained. The wheel cap or wheel trim ring may not come in contact with the tyre under any operating conditions. This applies in particular to tyres with rim protection (flange ribs “FR”).

**Directional tyres** must be fitted so that they roll in the direction of the arrow on the sidewall as the vehicle moves forward.

Exception: For a short-term use as a temporary fitment spare; but revert to specified fitted position at the earliest possible opportunity!

**Asymmetrical tyres** must be fitted with the sidewall ‘Outside’ on the outside of the vehicle so that their asymmetrical treads can be used to best effect.



## Tyre pressure

### SAFETY WARNING!

**Incorrect tyre pressure can lead to the inside of the tyre being damaged. This can result in tyre failure or even a blowout.**

**Hidden tyre damages are not rectified by adjusting the tyre pressure.**

**Table 1:**

### Load capacities and tyre pressures – standard load car tyres

(The tyre pressure values shown here apply to speeds up to 160 km/h (100 mph) and camber angles not greater than 2°)

| Load Index | Load capacity (kg) at tyre pressure (bar) |     |     |     |     |     |
|------------|-------------------------------------------|-----|-----|-----|-----|-----|
|            | 2.0                                       | 2.1 | 2.2 | 2.3 | 2.4 | 2.5 |
| 62         | 220                                       | 230 | 240 | 250 | 255 | 265 |
| 63         | 230                                       | 235 | 245 | 255 | 265 | 272 |
| 64         | 235                                       | 245 | 255 | 260 | 270 | 280 |
| 65         | 245                                       | 250 | 260 | 270 | 280 | 290 |
| 66         | 250                                       | 260 | 270 | 280 | 290 | 300 |
| 67         | 255                                       | 265 | 275 | 285 | 295 | 307 |
| 68         | 265                                       | 275 | 285 | 295 | 305 | 315 |
| 69         | 270                                       | 285 | 295 | 305 | 315 | 325 |
| 70         | 280                                       | 290 | 300 | 315 | 325 | 335 |
| 71         | 290                                       | 300 | 310 | 325 | 335 | 345 |
| 72         | 295                                       | 310 | 320 | 330 | 345 | 355 |
| 73         | 305                                       | 315 | 330 | 340 | 355 | 365 |
| 74         | 315                                       | 325 | 340 | 350 | 365 | 375 |
| 75         | 325                                       | 335 | 350 | 360 | 375 | 387 |
| 76         | 335                                       | 350 | 360 | 375 | 385 | 400 |
| 77         | 345                                       | 360 | 370 | 385 | 400 | 412 |
| 78         | 355                                       | 370 | 385 | 400 | 410 | 425 |
| 79         | 365                                       | 380 | 395 | 410 | 425 | 437 |
| 80         | 375                                       | 390 | 405 | 420 | 435 | 450 |
| 81         | 385                                       | 400 | 415 | 430 | 445 | 462 |
| 82         | 395                                       | 415 | 430 | 445 | 460 | 475 |
| 83         | 405                                       | 425 | 440 | 455 | 470 | 487 |
| 84         | 420                                       | 435 | 450 | 470 | 485 | 500 |
| 85         | 430                                       | 450 | 465 | 480 | 500 | 515 |
| 86         | 445                                       | 460 | 480 | 495 | 515 | 530 |
| 87         | 455                                       | 475 | 490 | 510 | 525 | 545 |
| 88         | 470                                       | 485 | 505 | 525 | 540 | 560 |
| 89         | 485                                       | 505 | 525 | 545 | 560 | 580 |

**Load capacities and tyre pressures - standard load car tyres**

(The tyre pressure values shown here apply to speeds up to 160 km/h (100 mph)  
and camber angles not greater than 2°)

| Load Index | Load capacity (kg) at tyre pressure (bar) |      |      |      |      |      |
|------------|-------------------------------------------|------|------|------|------|------|
|            | 2.0                                       | 2.1  | 2.2  | 2.3  | 2.4  | 2.5  |
| 90         | 500                                       | 520  | 540  | 560  | 580  | 600  |
| 91         | 515                                       | 535  | 555  | 575  | 595  | 615  |
| 92         | 525                                       | 550  | 570  | 590  | 610  | 630  |
| 93         | 545                                       | 565  | 585  | 610  | 630  | 650  |
| 94         | 560                                       | 585  | 605  | 625  | 650  | 670  |
| 95         | 575                                       | 600  | 625  | 645  | 670  | 690  |
| 96         | 595                                       | 620  | 640  | 665  | 685  | 710  |
| 97         | 610                                       | 635  | 660  | 685  | 705  | 730  |
| 98         | 625                                       | 650  | 675  | 700  | 725  | 750  |
| 99         | 650                                       | 675  | 700  | 725  | 750  | 775  |
| 100        | 670                                       | 695  | 720  | 750  | 775  | 800  |
| 101        | 690                                       | 720  | 745  | 770  | 800  | 825  |
| 102        | 710                                       | 740  | 765  | 795  | 825  | 850  |
| 103        | 730                                       | 760  | 790  | 820  | 845  | 875  |
| 104        | 755                                       | 785  | 815  | 840  | 870  | 900  |
| 105        | 775                                       | 805  | 835  | 865  | 895  | 925  |
| 106        | 795                                       | 825  | 860  | 890  | 920  | 950  |
| 107        | 815                                       | 850  | 880  | 910  | 945  | 975  |
| 108        | 835                                       | 870  | 905  | 935  | 970  | 1000 |
| 109        | 860                                       | 895  | 930  | 965  | 995  | 1030 |
| 110        | 885                                       | 920  | 955  | 990  | 1025 | 1060 |
| 111        | 910                                       | 950  | 985  | 1020 | 1055 | 1090 |
| 112        | 935                                       | 975  | 1010 | 1050 | 1085 | 1120 |
| 113        | 960                                       | 1000 | 1040 | 1075 | 1115 | 1150 |
| 114        | 985                                       | 1025 | 1065 | 1105 | 1140 | 1180 |
| 115        | 1015                                      | 1055 | 1095 | 1135 | 1175 | 1215 |
| 116        | 1045                                      | 1085 | 1130 | 1170 | 1210 | 1250 |

**Table 2:****Load capacities and tyre pressures - Reinforced and Extra Load (XL, without HL prefix) car tyres**

(The tyre pressure values shown here apply to speeds up to 160 km/h (100 mph)  
and camber angles not greater than 2°)

| Load Index | Load capacity (kg) at tyre pressure (bar) |      |      |      |      |      |      |      |      |      |
|------------|-------------------------------------------|------|------|------|------|------|------|------|------|------|
|            | 2.0                                       | 2.1  | 2.2  | 2.3  | 2.4  | 2.5  | 2.6  | 2.7  | 2.8  | 2.9  |
| 79         | 325                                       | 340  | 350  | 365  | 375  | 390  | 400  | 415  | 425  | 437  |
| 80         | 335                                       | 350  | 360  | 375  | 385  | 400  | 410  | 425  | 440  | 450  |
| 81         | 345                                       | 355  | 370  | 385  | 395  | 410  | 425  | 435  | 450  | 462  |
| 82         | 355                                       | 365  | 380  | 395  | 410  | 420  | 435  | 450  | 460  | 475  |
| 83         | 360                                       | 375  | 390  | 405  | 420  | 430  | 445  | 460  | 475  | 487  |
| 84         | 370                                       | 385  | 400  | 415  | 430  | 445  | 460  | 470  | 485  | 500  |
| 85         | 385                                       | 400  | 415  | 430  | 445  | 455  | 470  | 485  | 500  | 515  |
| 86         | 395                                       | 410  | 425  | 440  | 455  | 470  | 485  | 500  | 515  | 530  |
| 87         | 405                                       | 420  | 435  | 455  | 470  | 485  | 500  | 515  | 530  | 545  |
| 88         | 415                                       | 435  | 450  | 465  | 480  | 495  | 515  | 530  | 545  | 560  |
| 89         | 430                                       | 450  | 465  | 480  | 500  | 515  | 530  | 550  | 565  | 580  |
| 90         | 445                                       | 465  | 480  | 500  | 515  | 535  | 550  | 565  | 585  | 600  |
| 91         | 455                                       | 475  | 495  | 510  | 530  | 545  | 565  | 580  | 600  | 615  |
| 92         | 470                                       | 485  | 505  | 525  | 540  | 560  | 575  | 595  | 615  | 630  |
| 93         | 485                                       | 500  | 520  | 540  | 560  | 575  | 595  | 615  | 630  | 650  |
| 94         | 500                                       | 520  | 535  | 555  | 575  | 595  | 615  | 635  | 650  | 670  |
| 95         | 515                                       | 535  | 555  | 575  | 595  | 615  | 630  | 650  | 670  | 690  |
| 96         | 525                                       | 550  | 570  | 590  | 610  | 630  | 650  | 670  | 690  | 710  |
| 97         | 540                                       | 565  | 585  | 605  | 625  | 650  | 670  | 690  | 710  | 730  |
| 98         | 555                                       | 580  | 600  | 625  | 645  | 665  | 685  | 710  | 730  | 750  |
| 99         | 575                                       | 600  | 620  | 645  | 665  | 690  | 710  | 730  | 755  | 775  |
| 100        | 595                                       | 620  | 640  | 665  | 690  | 710  | 735  | 755  | 780  | 800  |
| 101        | 615                                       | 635  | 660  | 685  | 710  | 735  | 755  | 780  | 800  | 825  |
| 102        | 630                                       | 655  | 680  | 705  | 730  | 755  | 780  | 805  | 825  | 850  |
| 103        | 650                                       | 675  | 700  | 725  | 750  | 775  | 800  | 825  | 850  | 875  |
| 104        | 670                                       | 695  | 720  | 750  | 775  | 800  | 825  | 850  | 875  | 900  |
| 105        | 685                                       | 715  | 740  | 770  | 795  | 820  | 850  | 875  | 900  | 925  |
| 106        | 705                                       | 735  | 760  | 790  | 815  | 845  | 870  | 895  | 925  | 950  |
| 107        | 725                                       | 755  | 780  | 810  | 840  | 865  | 895  | 920  | 950  | 975  |
| 108        | 745                                       | 770  | 800  | 830  | 860  | 890  | 915  | 945  | 970  | 1000 |
| 109        | 765                                       | 795  | 825  | 855  | 885  | 915  | 945  | 975  | 1000 | 1030 |
| 110        | 785                                       | 820  | 850  | 880  | 910  | 940  | 970  | 1000 | 1030 | 1060 |
| 111        | 810                                       | 840  | 875  | 905  | 935  | 970  | 1000 | 1030 | 1060 | 1090 |
| 112        | 830                                       | 865  | 900  | 930  | 965  | 995  | 1025 | 1060 | 1090 | 1120 |
| 113        | 855                                       | 890  | 920  | 955  | 990  | 1020 | 1055 | 1085 | 1120 | 1150 |
| 114        | 875                                       | 910  | 945  | 980  | 1015 | 1050 | 1080 | 1115 | 1145 | 1180 |
| 115        | 905                                       | 940  | 975  | 1010 | 1045 | 1080 | 1115 | 1145 | 1180 | 1215 |
| 116        | 930                                       | 965  | 1000 | 1040 | 1075 | 1110 | 1145 | 1180 | 1215 | 1250 |
| 117        | 955                                       | 995  | 1030 | 1065 | 1105 | 1140 | 1180 | 1215 | 1250 | 1285 |
| 118        | 980                                       | 1020 | 1060 | 1095 | 1135 | 1170 | 1210 | 1245 | 1285 | 1320 |
| 119        | 1010                                      | 1050 | 1090 | 1130 | 1170 | 1210 | 1245 | 1285 | 1320 | 1360 |
| 120        | 1040                                      | 1080 | 1120 | 1165 | 1205 | 1245 | 1285 | 1320 | 1360 | 1400 |

**Table 3:****Load capacities and tyre pressures - Extra Load Tyres (XL) with HL prefix.**

(The tyre pressure values shown here apply to speeds up to 160 km/h (100 mph) and camber angles not greater than 2°). Reference pressure 2.9 bar.

| Load Index | Load capacity (kg) at tyre pressure (bar) |     |     |     |      |      |      |      |      |      |
|------------|-------------------------------------------|-----|-----|-----|------|------|------|------|------|------|
|            | 2.0                                       | 2.1 | 2.2 | 2.3 | 2.4  | 2.5  | 2.6  | 2.7  | 2.8  | 2.9  |
| 90         | 415                                       | 435 | 455 | 475 | 495  | 515  | 540  | 560  | 580  | 600  |
| 91         | 425                                       | 445 | 465 | 490 | 510  | 530  | 550  | 575  | 595  | 615  |
| 92         | 435                                       | 455 | 480 | 500 | 520  | 545  | 565  | 585  | 610  | 630  |
| 93         | 450                                       | 470 | 495 | 515 | 540  | 560  | 585  | 605  | 630  | 650  |
| 94         | 460                                       | 485 | 510 | 530 | 555  | 580  | 600  | 625  | 645  | 670  |
| 95         | 475                                       | 500 | 525 | 545 | 570  | 595  | 620  | 640  | 665  | 690  |
| 96         | 490                                       | 515 | 540 | 565 | 590  | 610  | 635  | 660  | 685  | 710  |
| 97         | 505                                       | 530 | 555 | 580 | 605  | 630  | 655  | 680  | 705  | 730  |
| 98         | 515                                       | 545 | 570 | 595 | 620  | 645  | 670  | 700  | 725  | 750  |
| 99         | 535                                       | 560 | 590 | 615 | 640  | 670  | 695  | 720  | 750  | 775  |
| 100        | 550                                       | 580 | 605 | 635 | 660  | 690  | 715  | 745  | 770  | 800  |
| 101        | 570                                       | 595 | 625 | 655 | 685  | 710  | 740  | 770  | 795  | 825  |
| 102        | 585                                       | 615 | 645 | 675 | 705  | 735  | 760  | 790  | 820  | 850  |
| 103        | 605                                       | 635 | 665 | 695 | 725  | 755  | 785  | 815  | 845  | 875  |
| 104        | 620                                       | 650 | 685 | 715 | 745  | 775  | 805  | 840  | 870  | 900  |
| 105        | 640                                       | 670 | 700 | 735 | 765  | 795  | 830  | 860  | 895  | 925  |
| 106        | 655                                       | 690 | 720 | 755 | 785  | 820  | 850  | 885  | 915  | 950  |
| 107        | 670                                       | 705 | 740 | 775 | 805  | 840  | 875  | 910  | 940  | 975  |
| 108        | 690                                       | 725 | 760 | 795 | 830  | 860  | 895  | 930  | 965  | 1000 |
| 109        | 710                                       | 745 | 780 | 815 | 850  | 890  | 925  | 960  | 995  | 1030 |
| 110        | 730                                       | 770 | 805 | 840 | 875  | 915  | 950  | 985  | 1025 | 1060 |
| 111        | 750                                       | 790 | 825 | 865 | 900  | 940  | 975  | 1015 | 1050 | 1090 |
| 112        | 770                                       | 810 | 850 | 890 | 925  | 965  | 1005 | 1045 | 1080 | 1120 |
| 113        | 795                                       | 835 | 870 | 910 | 950  | 990  | 1030 | 1070 | 1110 | 1150 |
| 114        | 815                                       | 855 | 895 | 935 | 975  | 1015 | 1060 | 1100 | 1140 | 1180 |
| 115        | 840                                       | 880 | 920 | 965 | 1005 | 1045 | 1090 | 1130 | 1175 | 1215 |
| 116        | 860                                       | 905 | 950 | 990 | 1035 | 1080 | 1120 | 1165 | 1205 | 1250 |

**The tyre must be inflated to the pressure specified by the vehicle and tyre manufacturer. This varies depending on the load and service conditions.**

The pressure always refers to the cold tyre and must not be allowed to fall below this value. The pressure inside warm tyres - driving causes heat build-up - is naturally higher. So never reduce the pressure of warm tyres. Once they cool down, their pressure could fall below the specified **minimum tyre pressure**.

The tyre pressure must be checked and adjusted regularly every 14 days on the cold tyre.

The spare tyre may not be forgotten.

Incorrect tyre pressure causes premature and / or uneven tread wear. **Under-inflated** tyres have a higher **rolling resistance**, and this means a higher **fuel consumption**. In extreme cases underinflation may result in tyre failure.

The tyre pressure values for car tyres given in table 1 and 2 are **minimum pressures** for speeds up to 160 km/h (100 mph). They may be increased, for example, for reasons of driving stability. Please refer to the recommendation of the vehicle manufacturer.

3.2 bar is the **maximum tyre pressure** on standard version car tyres up to and including Speed Symbol T.

3.5 bar is the maximum tyre pressure for H-, V-, W-, Y as well as XL / Reinforced and HL tyres. **These values may not be exceeded.**

**ZR\*** tyres without service description have from 160 km/h (100 mph) to 190 km/h (118 mph) inclusive the stated pressure of 2.5 bar. Then the inflation pressure must be increased by 0.1 bar for each 10 km/h (6 mph) up to 3.5 bar at 240 km/h (150 mph) under full load and maximum 2° wheel camber.

<sup>\*)</sup> Obsolete designation, production until Nov., 2014.

**Table 4:**

For **higher speeds** the **tyre pressure** should be **increased** in regard of the load capacity (taken from the ETRTO Standards Manual):

| Speed capacity of the vehicle (incl. tolerance, about 9 km/h, 6 mph)<br>(km) | Speed Symbols                        |     |     |     |     |     |     |     |     |  |
|------------------------------------------------------------------------------|--------------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|--|
|                                                                              | Q                                    | R   | S   | T   | U   | H   | V   | W   | Y   |  |
|                                                                              | Tyre pressure <sup>*)</sup><br>(bar) |     |     |     |     |     |     |     |     |  |
| ≤160                                                                         | 2.5                                  | 2.5 | 2.5 | 2.5 | 2.5 | 2.5 | 2.5 | 2.5 | 2.5 |  |
| 170                                                                          |                                      | 2.6 | 2.6 | 2.6 | 2.6 | 2.6 | 2.6 | 2.5 | 2.5 |  |
| 180                                                                          |                                      |     | 2.6 | 2.6 | 2.6 | 2.6 | 2.6 | 2.5 | 2.5 |  |
| 190                                                                          |                                      |     |     | 2.7 | 2.7 | 2.7 | 2.7 | 2.5 | 2.5 |  |
| 200                                                                          |                                      |     |     |     | 2.7 | 2.7 | 2.7 | 2.6 | 2.5 |  |
| 210                                                                          |                                      |     |     |     |     | 2.8 | 2.8 | 2.7 | 2.5 |  |
| 220                                                                          |                                      |     |     |     |     |     | 2.8 | 2.8 | 2.5 |  |
| 230                                                                          |                                      |     |     |     |     |     | 2.8 | 2.9 | 2.6 |  |
| 240                                                                          |                                      |     |     |     |     |     | 2.8 | 3.0 | 2.7 |  |
| 250                                                                          |                                      |     |     |     |     |     |     | 3.0 | 2.8 |  |
| 260                                                                          |                                      |     |     |     |     |     |     | 3.0 | 2.9 |  |
| 270                                                                          |                                      |     |     |     |     |     |     | 3.0 | 3.0 |  |
| 280                                                                          |                                      |     |     |     |     |     |     |     | 3.0 |  |
| 290                                                                          |                                      |     |     |     |     |     |     |     | 3.0 |  |
| 300                                                                          |                                      |     |     |     |     |     |     |     | 3.0 |  |

\*) at the maximum load of the tyre, up to 2 ° wheel camber

## Load capacity and speed

When determining the minimum tyre size necessary for a vehicle, the permitted **axle load** and the **maximum design speed** of the vehicle must be used as a basis.

The maximum load capacity of a car tyre is expressed through its **Load Index (LI)** (see page 8).

**Table 5:**

**Percentage of load capacity versus speed** <sup>1)</sup>  
(taken from the ETRTO Standards Manual):

| Speed capacity of the vehicle (incl. tolerance, about 1 % V <sub>max</sub> + 6,5 km/h)<br>(km) | Speed Symbols |     |     |     |               |
|------------------------------------------------------------------------------------------------|---------------|-----|-----|-----|---------------|
|                                                                                                | H             | V   | W   | Y   | (...Y)        |
|                                                                                                | %             |     |     |     |               |
| 210                                                                                            | 100           | 100 | 100 | 100 | 100           |
| 220                                                                                            | -             | 97  | 100 | 100 | 100           |
| 230                                                                                            | -             | 94  | 100 | 100 | 100           |
| 240                                                                                            | -             | 91  | 100 | 100 | 100           |
| 250                                                                                            | -             | -   | 95  | 100 | 100           |
| 260                                                                                            | -             | -   | 90  | 100 | 100           |
| 270                                                                                            | -             | -   | 85  | 100 | 100           |
| 280                                                                                            | -             | -   | -   | 95  | <sup>3)</sup> |
| 290                                                                                            | -             | -   | -   | 90  | <sup>3)</sup> |
| 300                                                                                            | -             | -   | -   | 85  | <sup>3)</sup> |
| > 300 <sup>2)</sup>                                                                            | -             | -   | -   | -   | <sup>3)</sup> |

<sup>1)</sup> For intermediate maximum speeds, linear interpolation of the tyre load capacity is permitted.

<sup>2)</sup> For speeds over 300 km/h (187 mph), the relevant inflation pressures will be agreed between vehicle and tyre manufacturers (or their national associations), taking into consideration the vehicle characteristics and the type of service.

<sup>3)</sup> (...Y) tyres fulfill the requirements of Y tyres and could even be higher depending on the maximum speed. The load capacity of (...Y) tyres has to be confirmed by the tyre manufacturer.

(For **ZR tyres** (production until Nov, 2014) without service description the maximum load capacity given in the tables from page 28 onwards applies to speeds up to 240 km/h (150 mph).

**For speeds over 240 km/h (150 mph) please refer to us for load capacity and tyre pressure.)**

If car tyres are to be used on a vehicle with a **wheel camber** of over 2 °, please check load capacity and tyre pressure with us.

The load capacity of tyres in **twin fitment** is 1.85 times the load capacity of a single tyre.

The **load capacities** in the tables for car tyres can be increased if the tyres are fitted on vehicles with **the following low type-related** max. speeds and if the inflation pressure is increased at the same time (taken from the ETRTO Standards Manual):

|                             |        |     |     |     |     |     |
|-----------------------------|--------|-----|-----|-----|-----|-----|
| Max.speed capability        | (km/h) | 60  | 50  | 40  | 30  | 25  |
| Load capacity               | (%)    | 110 | 115 | 125 | 135 | 142 |
| Inflation pressure increase | (bar)  | 0.1 | 0.2 | 0.3 | 0.4 | 0.5 |

## Tyre damage

**Most tyre damage is caused by incorrect tyre pressure**, so we recommend a regular tyre pressure check every 2 weeks. When the car has been driven and the tyres are warm, it is normal for the tyre pressure to increase. Never bleed warm tyres.

A balanced, even **style of driving** is beneficial for the tyres and the environment. Harsh acceleration, braking and fast cornering shorten the **service life** of tyres.

This applies equally to other types of **tyre usage** such as severe scuffing along the kerb, or driving over obstacles. This can cause hidden or visible **damage** to tyres.

**Vibrations** of the steering wheel could point to tyre damage. All the vehicle's tyres should be checked immediately for damage.

**Overstressing** of tyres (excessive speed or overloading), is to be avoided. This has the same critical effect as **under inflation** and can cause heat damage to the tyre.

## Tyre rotation on a vehicle

**The tyres on a vehicle should be rotated regularly to help ensure even wear and maximum tread life.**

Tyres should be rotated as instructed in the vehicle owner's manual, with special attention being given to the **recommended interval for rotating tyres**. Unless otherwise specified by the vehicle manufacturer, tyres should be rotated every 10,000 to 12,000 kilometers – or even earlier if the tread shows signs of uneven wear. In the latter case, the vehicle's wheel alignment and pertinent mechanical components should be checked and corrected, if need be.

Full-size **spare tyres** (not temporary spares) of the same size and design as the tyres in use on the vehicle should be included in the tyre rotation. In conjunction with the rotation, the full-size spare tyre's inflation pressure should be checked and, if need be, corrected.

A tyre's **inflation pressure** must correspond to what is specified in the vehicle owner's manual for the respective tyre position (recommended inflation pressure may differ for the front- and rear axle tyres).

Tyre rotation may effect the **tyre pressure monitoring system** (TPMS). The vehicle owner's manual or a qualified service professional should be consulted in the event that the TPMS has to be adjusted or recalibrated.

The **rolling direction** of directional tyres should not be reversed when the tyres are rotated.

### Mixing tyres should be avoided

Tyre size, Load Index (LI) and Speed Symbol (SSY) at all wheel positions should be in accordance with the vehicle manufacturer's specification. In many countries, this is a legal requirement.

Driving with a non-recommended mix of tyre sizes, designs and Speed Symbols can be dangerous. In the event that tyres of different sizes, designs, Load Index or Speed Symbol are to be fitted on a vehicle, the vehicle manufacturer's recommendations should be heeded and / or the advice of a qualified tyre specialist sought. Some vehicles leave the factory with different tyre sizes on the front and rear axles. This configuration must not be changed unless approved by the vehicle manufacturer.

No more than one temporary spare<sup>\*)</sup> should be used on a vehicle at any one time. A tyre of this kind may only be driven up to a maximum speed of 80 km/h and is intended for temporary use, as indicated on the tyre sidewall and / or on a label attached to the tyre or the wheel.

<sup>\*)</sup> only available for tyre brands Continental and Uniroyal  
See page 88 ff.

### Mounting new tyres on the rear axle

It is recommended that all tyres used on the vehicle be replaced at the same time. If this is not the case, at least all the tyres on the same axle should be replaced at the same time.

If only one axle set of tyres is replaced, it is recommended to fit the newest tyres on the rear axle.

### Additional important tips regarding tyre position

The **spare tyre's** date of manufacture and condition (e. g. signs of cracking, remaining tread depth) should be checked regularly.

For 4-wheel drive and All Wheel drive vehicles, any special tyre fitment requirements in the vehicle owner's manual should be heeded – especially if the vehicle is equipped with electronic systems such as antilock brakes, traction control or stability control. Damage to the vehicle or its transmission can result if these requirements are not followed.

**Winter tyres** should be fitted to all wheel positions. They should not be mixed with all-season or summer tyres.

## Tyre Storage Recommendations

These recommendations are intended for consumers, but they are also important for tyre dealers. For commercial applications of new and waste tyres (tyre dealers and fleets), there may be more stringent and legal restrictions. Please check local regulations.

ContiSeal tyres<sup>\*)</sup> should be stored under the same conditions as recommended here for non-ContiSeal tyres.

Due to the potentially sticky nature of the inside of ContiSeal tyres, do not place any objects or material inside the tyre as they may become stuck and subsequently difficult to remove without damage to the tyre.

Tyres are compounded to resist normal deterioration caused e. g. by sunlight, humidity and ozone. Nevertheless, stored tyres should be protected against these and other potentially damaging conditions.

The longer the storage period, the more exposure there is to potential damage.

After dismantling from a vehicle the tyres should be thoroughly cleaned and inspected for damage. Remove all stones and debris from the grooves. Chalk marking the tyres with their wheel positions (FL for Front Left, RR for Rear Right, etc.) will help to find the correct positions according to the rotational plan.

### General:

- › DO STORE TYRES where it is clean, dry and moderately ventilated.
- › **Moist conditions** should be avoided. Tyres destined for retreading / repairing should be thoroughly cleaned and dried out before such operations are performed.
- › DO STORE TYRES at **temperatures** not exceeding 35 °C (95 F), preferable below 25 °C (77 F). Direct contact with hot pipes and radiators must be avoided.
- › Also deep temperatures below the freezing point might lead to brittleness and tyres should be carefully warmed up before mounting.
- › DO STORE TYRES, if outdoors, protected by an opaque waterproof covering.  
**This is mandatory for ContiSilent tyres.**  
**Avoid creating a heat box or steam bath.**  
**Ensure proper ventilation.**
- › DO STORE TYRES, if outdoors, where tyres are raised off the storage surface.
- › **AVOID** STORING TYRES on piers, ship decks, or other unprotected areas.
- › **AVOID** STORING TYRES, where they can be damaged by passing objects - lawn mower, bicycle, or garden tools.
- › **AVOID** STORING TYRES where the area is wet, oily, and / or greasy such as with gasoline or petroleum-based products. Also, do not store on or against sensitive surfaces where staining can take place.

### Tyres with rims

#### Inflated



Do not stand them upright

hang them

or pile them (restack every four weeks)

### Tyres without rims



Do not pile them, or hang them

stand them upright and rotate them every four weeks  
(on racks clear of floor)

- › **AVOID** STORING TYRES in the proximity of chemical agents like solvents, fuels, oils, hydrocarbons, paint, acids, disinfectants, etc.
- › **Do not** use tyres as a workbench or tool stand. Soldering irons, power drill and tools can damage a tyre.
- › **AVOID** STORING TYRES where subject to extreme temperatures, direct sunlight or artificial light with a high ultra-violet content. Room lighting with ordinary incandescent lamps is preferable to fluorescent tubes.
- › **Never** put a burning cigarette on a pile of tyres.
- Never** store them near battery chargers, ovens, or open fires.
- › **Loose tyres or tyres mounted on rims,** but not installed on a vehicle:
- › DO STORE TYRES so that they retain their shape.
- › Mounted tyres should preferable be inflated to only 100 kPa (15 psi / 1 bar).
- › **Be sure to adjust the tyres to the recommended inflation pressure before mounting on the vehicle.**
- › **AVOID** STORING TYRES on black asphalt or other heat absorbent surfaces and on highly reflective surfaces (i. e., sand or snow covered ground).
- › **AVOID** STORING TYRES in the same area as an electric motor or other ozone generating source. If there is a question, check ozone levels to be sure they do not exceed 0.08 ppm.

<sup>\*)</sup> only available for tyre brand Continental

### Tyres installed on a vehicle in long term storage:

- › If possible, store the vehicle on blocks to remove all weight from the tyres and cover the tyres to protect them from environmental exposure.
- › If the vehicle cannot be raised, completely unload it to reduce the load on the tyres. The storage surface should be firm, reasonably level, well drained, and clean.
- › In cases where the tyres will be supporting the vehicle, it is permissible to inflate the tyres to the maximum pressure listed on the sidewall. Be sure to return the inflation pressure to recommended usage pressure before operating the vehicle.
- › In cases where the tyres will be supporting the vehicle, it is recommended that the vehicle be moved every month to reduce the risk of a 'flat spot'. If the tyres do develop "flat spots," these will usually disappear in a short period of service.

## Tyre repair



### SAFETY WARNING!

**Serious injury or death may result from a tyre disablement that is caused by failing to observe the following safety and maintenance information.**

During its service life, a tyre undergoes a variety of different usage conditions and can be damaged in many different ways. This damage can result from punctures, impacts, cuts, etc. Tyre damage can reduce a tyre's structural integrity by, for example:

- › Air loss resulting in underinflated service conditions which lead to internal structural damage;
- › Direct damage to tyre components such as rubber and plies;
- › Exposure of internal materials to the outside environment and resulting degradation; and / or
- › Exposure of internal materials to pressurized air (Intra-carcass pressurization).

For these reasons, tyres should be regularly inspected by the consumer. An inspection of the tyres should also be incorporated during routine vehicle maintenance procedures. If tyre damage is suspected or found, it should be carefully assessed by a trained tyre specialist immediately.

ContiSeal tyres<sup>\*)</sup> are designed to seal punctures in the tread from objects no larger than 5 mm diameter. Thoroughly inspect the tyre according to national industry standards. Carefully remove any object from the tyre tread. Even if the tyre seals, if it is punctured, the tyre must be removed from the rim and inspected carefully according to industry standards to determine whether a permanent repair can be made or whether the tyre must be removed from service and scrapped. A permanent repair will require removal of the tyre from the rim and application of a repair method specifically approved for ContiSeal tyres.

Among others, the tyre repair specialist, Rema TipTop has developed and approved instructions for the repair of ContiSeal tyres which can be found on the following website: [www.continental-tyres.co.uk/b2c/car/continental-tyre-technologies/contiseal.html](http://www.continental-tyres.co.uk/b2c/car/continental-tyre-technologies/contiseal.html)

A consumer should never repair a damaged tyre. Only a trained tyre specialist who can base his assessment on a thorough and comprehensive inspection of the specific tyre can determine whether an individual tyre is suitable for repair or should be removed from service.

This assessment should also take into account the complete service life history of the tyre including inflation, load, operating conditions, etc. If the tyre specialist decides to repair the tyre, then he should strictly follow all appropriate national tyre industry repair standards regarding the inspection process and repair procedures. Continental is not responsible for the specialist's decisions or the repaired tyre. Continental advises if a tyre is returned under complaint and reason for the product's disablement is in any way associated with a repair, or the reason for repair the manufacturer's warranty is invalidated.

It is forbidden by law to regroove car tyres.

<sup>\*)</sup> only available for tyre brand Continental

## Tyre service life for passenger car and light truck

The tyre industry has long recognized the consumers' role in the regular care and maintenance of their tyres. The point at which a tyre is replaced is a decision for which the owner of the tyre is responsible. The tyre owner should consider factors to include service conditions, maintenance history, storage conditions, visual inspections, and dynamic performance. The consumer should consult a tyre service professional with any questions about tyre service life.

### The following information and recommendations are made to aid in assessing the point of maximum service life.

Tyres are designed and built to provide many thousands of miles of excellent service. For maximum benefit, tyres must be maintained properly to avoid tyre damage and abuse that may result in tyre disablement. The service life of a tyre is a cumulative function of the storage, stowing, rotation and service conditions, which a tyre is subjected to throughout its life (load, speed, inflation pressure, road hazard injury, etc.). Since service conditions vary widely, accurately predicting the service life of any specific tyre in chronological time is not possible.

### The consumer plays an important role in tyre maintenance.

Tyres should be removed from service for numerous reasons, including tread worn down to minimum depth, damage or abuse (punctures, cuts, impacts, cracks, bulges, underinflation, overloading, etc). For these reasons tyres, including spares, must be inspected routinely, i. e., at least once a month. Regular inspection becomes particularly important the longer a tyre is kept in service. If tyre damage is suspected or found, Continental recommends that the consumer have the tyre inspected by a tyre service professional. Consumers should use this consultation to determine if the tyres can continue in service. It is recommended that spare tyres be inspected at the same time. This routine inspection should occur whether or not the vehicle is equipped with a tyre pressure monitoring system (TPMS).

Consumers are strongly encouraged to be aware of their tyres' visual condition. Also, they should be alert for any change in dynamic performance such as increased air loss, noise or vibration.

Such changes could be an indicator that one or more of the tyres should be immediately removed from service to prevent a tyre disablement. Also, the consumer should be the first to recognize a severe in-service impact to a tyre and to ensure that the tyre is inspected immediately thereafter.

Tyre storage, stowage and rotation are also important to the service life of the tyre. More information regarding proper storage, stowage and rotation is located in other Continental publications, which are available upon request and through its websites.

### Tyre service life recommendation

Continental is unaware of any technical data that supports a specific tyre age for removal from service. However, as with other members of the tyre and automotive industries, Continental recommends that all tyres (including spare tyres) that were manufactured more than ten (10) years previous <sup>1)</sup> be replaced with new tyres, even when tyres appear to be usable from their external appearance and if the tread depth may have not reached the minimum wear out depth. Vehicle manufacturers may recommend a different chronological age at which a tyre should be replaced based on their understanding of the specific vehicle application; Continental recommends that any such instruction be followed. Consumers should note that most tyres would have to be removed for tread wear-out or other causes before any proscribed removal period. A stated removal period in no way reduces the consumer's responsibility to replace tyres as needed.

## Minimum removal tread depth for passenger and light truck tyres

The legal minimum tread depth is 1,6 mm. This standard has been adopted as a regulation by many of the world's national transportation authorities. As an indication to the consumer, there are tread wear indicator bars in the main grooves of the tyre that become level with the tread surface at approximately 1.6 mm of remaining tread.

It should be pointed out that safe driving in wet weather conditions is affected by the tread depth, the pattern design and the rubber compound of the tyres. On wet roads braking performance will progressively decline and aquaplaning will increase with lower tread depths.

### Continental therefore recommends:

- › regular tyre check
- › reduced speed on wet roads
- › considering tyre replacement in good time

This applies especially to winter tyres for which winter driving properties such as snow traction are reduced at lower depths.

<sup>1)</sup> Production code of tyres see page 7.

## Guidelines on tyre safety for drivers and vehicle operators (recommended for vehicle handbooks)

**Tyres need to be properly handled if they are to keep you and other road users safe. So please note the following:**

1. The **tyre pressure** must be as indicated in the operating instructions for your vehicle or as marked on the vehicle itself. The pressure applies to cold tyres; it must not be any lower. Tyres that have become warm, e. g. through driving, will increase in pressure. Never release air from warm tyres, or the pressure could fall below the minimum.  
  
The pressure must be checked **every 14 days** when the tyres are cold. Don't forget to check the spare.  
  
If the pressure is too low, heat may build up in the tyre and lead to internal damage.  
  
**At high speeds the tyre may fail as a result of previous internal damage.** Tyre damage that cannot be seen is not put right simply by raising the pressure afterwards!
2. If you have to drive over kerbstones do it slowly and, if possible, at right angles. Don't drive up or against any steep or sharp-edged kerbstones or other objects (e. g. stones); this can lead to non-visible tyre damage which can cause problems later - **the tyre may fail when running at high speeds.**

3. Check tyres regularly for **damage**, such as stones, nails etc. that have penetrated the tyre, as well as any cuts, tears or bulges (in the sidewall). Foreign objects can also damage the inside of the tyre. Have your tyre dealer or specialist check your tyres if you are unsure of their condition. **Damaged tyres can burst.**
4. Never fit used tyres whose history you don't know. Remember that tyres age even when they are little used or not used at all. If you have a spare tyre and it has not been used for several years have it examined by a tyre specialist. We recommend that tyres (including the spare) should be removed from potential service if they were manufactured more than 10 years previous.
5. Check the **tread depth** of your tyres regularly. The lower the depth, the greater the **risk of aquaplaning**. Ensure that your tyres comply with the legally required tread depth.

- A** Ageing \_\_\_\_\_ 132-134  
Aquaplaning \_\_\_\_\_ 134
- B** Brittleness temperature \_\_\_\_\_ 116  
of rubber compounds
- C** Choice of tyre \_\_\_\_\_ 115  
ContiMobilityKit \_\_\_\_\_ 84, 117  
(tyre emergency set)  
ContiSeal tyres \_\_\_\_\_ 12-17, 21, 22, 24, 25, 28,  
117, 128, 131  
ContiSilent Technology \_\_\_\_\_ 11-13, 18, 22, 29, 128  
CST (new: sContact) \_\_\_\_\_ 80-83  
ContiTireSealant \_\_\_\_\_ 84
- D** Dimensions \_\_\_\_\_ 9, 32-79, 92-101, 102-110  
DIN \_\_\_\_\_ 3  
Directional tyres \_\_\_\_\_ 128, 127  
DOT \_\_\_\_\_ 3, 7
- E** ECE \_\_\_\_\_ 3  
E-Mobility \_\_\_\_\_ 30-31  
ETRTO \_\_\_\_\_ 124 ff.  
EU Tyre Label \_\_\_\_\_ 10  
EV-compatible symbol \_\_\_\_\_ 31
- F** Fitting lubricant \_\_\_\_\_ 117  
Fitting pressure \_\_\_\_\_ 118  
Fuel consumption \_\_\_\_\_ 123
- H** H-rated tyres \_\_\_\_\_ 8, 117, 123, 124, 125  
Higher grade tyres \_\_\_\_\_ 115
- I** Imprint \_\_\_\_\_ 4  
Inflation pressure / \_\_\_\_\_ 3, 9, 118, 134  
tyre pressure  
ISO \_\_\_\_\_ 3
- L** Load capacity \_\_\_\_\_ 8, 32-79, 92-101, 102-110,  
119-122, 124-125  
Load Index \_\_\_\_\_ 8, 32-79,  
92-101, 119-122, 124

- M** Max. tyre inflation pressure \_\_\_\_\_ 123  
Max. speed \_\_\_\_\_ 7, 8, 124-125  
Measuring rim \_\_\_\_\_ 32-79, 92-101, 115  
Min. (tyre) pressure \_\_\_\_\_ 123  
Min. tread depth \_\_\_\_\_ 133  
Mixed tyre fitments \_\_\_\_\_ 115
- N** New tyres \_\_\_\_\_ 3, 117
- O** Offset depth \_\_\_\_\_ 111  
Operating conditions \_\_\_\_\_ 3  
Operating instructions \_\_\_\_\_ 115-134  
Operating measurements \_\_\_\_\_ 9, 32-79,  
92-101  
Operating pressure \_\_\_\_\_ 118  
Overloading \_\_\_\_\_ 126, 132  
Overstressing \_\_\_\_\_ 126
- P** Production code \_\_\_\_\_ 7
- R** Regrooving \_\_\_\_\_ 131  
Reinforced \_\_\_\_\_ 7, 122  
Replacing 82-series by 80 \_\_\_\_\_ 115  
Rims / Wheels \_\_\_\_\_ 111-114, 115, 117  
Rim codes \_\_\_\_\_ 123  
Rim dimensions \_\_\_\_\_ 112-114  
Rim width \_\_\_\_\_ 32-79, 92-101  
Rolling circumference \_\_\_\_\_ 9, 32-79,  
92-101  
Rolling resistance \_\_\_\_\_ 123  
Runflat tyres SSR \_\_\_\_\_ 11-13, 16-18, 22, 23, 26,  
115, 117, 118

- S** Safety warning \_\_\_\_\_ 3, 115, 124, 118, 130  
Service description \_\_\_\_\_ 8, 32-79, 92-101  
Service life \_\_\_\_\_ 3, 132 f.  
Sidewall marking \_\_\_\_\_ 6, 7  
Size ranges  
passenger / SUV \_\_\_\_\_ 11 ff.  
van tyres \_\_\_\_\_ 88 ff.  
Snowflake designation \_\_\_\_\_ 7, 116  
Spare tyre \_\_\_\_\_ 8, 80-83, 127  
Speed \_\_\_\_\_ 8, 123 f., 134  
Speed Symbol (SSY) \_\_\_\_\_ 8  
SSR runflat tyres \_\_\_\_\_ 11-13, 16-18, 22, 23, 26,  
115, 117, 118  
Static radius \_\_\_\_\_ 32-79, 92-101  
Storage \_\_\_\_\_ 128  
Style of driving \_\_\_\_\_ 126  
Summer tyres \_\_\_\_\_ 11-19
- T** Technical data \_\_\_\_\_ 32-79, 92-101  
Temperature (use of tyres) \_\_\_\_\_ 116  
Trailers, car-drawn \_\_\_\_\_ 102-110  
Tread depth \_\_\_\_\_ 7, 113, 133  
Tubeless \_\_\_\_\_ 7  
TWI (Tread Wear Indicators) \_\_\_\_\_ 7  
Twin fitment \_\_\_\_\_ 125  
Tyre ageing \_\_\_\_\_ 132-134  
Tyre damages \_\_\_\_\_ 126, 130, 134  
Tyre emergency set \_\_\_\_\_ 84, 117  
ContiMobilityKit  
Tyre fitting \_\_\_\_\_ 116-118  
(EU) Tyre Label \_\_\_\_\_ 10  
Tyre markings \_\_\_\_\_ 7  
Tyre pressure / \_\_\_\_\_ 3, 9, 118, 134  
inflation pressure  
Tyre repairs \_\_\_\_\_ 130  
Tyre Sealant \_\_\_\_\_ 85  
Tyre service life \_\_\_\_\_ 3, 132 f.  
Tyre width \_\_\_\_\_ 9, 32-79, 92-101, 115

- U** Under-inflation \_\_\_\_\_ 123, 126  
Units of measurements \_\_\_\_\_ 9
- V** V-rated tyres \_\_\_\_\_ 8, 117, 123, 124, 125  
Valve caps \_\_\_\_\_ 118  
Valve support \_\_\_\_\_ 117  
Van tyres \_\_\_\_\_ 88-101  
Vibrations \_\_\_\_\_ 126
- W** W-rated tyres \_\_\_\_\_ 8, 117, 123, 124, 125  
Wheel camber \_\_\_\_\_ 125  
Wheel caps / trim rings \_\_\_\_\_ 118  
Wheel disc \_\_\_\_\_ 111  
Wheels / rims \_\_\_\_\_ 111-114, 117  
Winter tyres \_\_\_\_\_ 7, 20-23, 90, 115 f., 133
- X** XL (Extra Load) \_\_\_\_\_ 7, 121 ff.
- Y** Y-rated tyres \_\_\_\_\_ 8, 117, 123, 124, 125
- Z** ZR-rated tyres\* \_\_\_\_\_ 8, 123, 125

\* Obsolete tyre designation, production until Nov., 2014.

## Technical Customer Services

|                                 |                                                                                                                                                                         |                                                                                                                  |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------|
| Austria                         | <b>Continental Reifen Austria GmbH</b><br>Triester Straße 14<br>A-2351 Wiener Neudorf, Austria                                                                          | +43 (0) 22 36 / 40 40 25 89<br>austria.tcs@continental.com<br>www.continental.at                                 |
| Baltic States                   | <b>Continental Opony Polska Sp.z o.o.</b><br>ul. Zwirki i Wigury 16C<br>02-092 Warsaw<br>Poland                                                                         | +370 657 77720<br>baltic.tcs@continental.com<br>www.continental.ee<br>www.continental.lt<br>www.continental.lv   |
| BeNeLux                         | <b>Continental Benelux srl/bv</b><br>Hermeslaan 1B<br>B-1831 Diegem, Belgium                                                                                            | +32 (0) 2 710 22 11<br>CustomerServiceBelgium@conti.de<br>CustomerServiceNL@conti.de                             |
| Bulgaria<br>(see Romania)       | <b>Continental Automotive Products SRL</b><br>Avram Imbroane 9<br>300129 Timisoara, Romania                                                                             | +32 (0)2 710 2372<br>customerservicebelgium@conti.de<br>customerservicentl@conti.de                              |
| Czech Republic                  | <b>Continental Barum s.r.o.</b><br>Objizdna 1628<br>765 02 Otrokovice, Czech Republic                                                                                   | +420 577 511 111<br>cz.tcs@continental.cz<br>www.continental.cz                                                  |
| Denmark                         | <b>Continental Dæk Danmark A/S</b><br>Banemarksvej 50 E<br>2605 Broendby, Denmark                                                                                       | +45 43 23 04 10<br>co_cod@conti.de<br>www.continental-daek.dk                                                    |
| Finland                         | <b>Continental Rengas Oy</b><br>PL 2 ; FIN-02661 Espoo, Hevosenkenkä 3;<br>02600 Espoo<br>Finland                                                                       | +358 9 329 900 / ext. ...3<br>Technical Service<br>tekninenpalvelu.finland@conti.de<br>www.continental-rengas.fi |
| France                          | <b>Continental France SNC</b><br>60610 La Croix Saint-Ouen, Rue Irene Joliot Curie 80,<br>France                                                                        | Technical Hotline: +33 820 902 900<br>tcs.france@conti.de<br>www.continental-pneus.fr                            |
| Germany                         | <b>Continental Reifen Deutschland GmbH</b><br>Jaedekamp 30<br>D-30419 Hanover<br>Germany                                                                                | +49 (0) 800 72 38 284<br>technik.pkw-lkw@conti.de<br>www.continental.de                                          |
| Hungary<br>(North Macedonia)    | <b>Continental Hungaria Kft.</b><br>2040 Budaörs, Távíró köz 2-4.<br>Hungary                                                                                            | +36 20 50 97 358<br>hungary.tcs@conti.de<br>www.continental.hu                                                   |
| Italy                           | <b>Continental Italia S.p.a.</b><br>Via Gioacchino Winckelmann 1<br>20146 - Milano, Italy                                                                               | +39 02 42 41 03 29<br>italy.cs.box@conti.de<br>www.continental-pneumatici.it                                     |
| Middle East/Near East<br>(MENA) | <b>Continental Middle East DMCC</b><br>4th Floor, Jumeirah Business Centre 3 (JBC 3),<br>Cluster Y, Jumeirah Lake Towers<br>P.O Box 336519, Dubai, United Arab Emirates | +971 (0) 456 159 00<br>me.tcs@conti.de<br>www.continental-me.com                                                 |
| Moldova                         | <b>Continental Opony Polska Sp.z o.o.</b><br>ul. Zwirki i Wigury 16C, 02-092 Warsaw, Poland                                                                             | +48 538 979 155<br>moldova.tcs@continental.com                                                                   |
| North Africa                    | <b>Continental Tyre North-Africa SARL</b><br>Tour Casablanca Finance City, Lot 57 - Étage 14 - Casa Anfa<br>20220 Casablanca, Morocco                                   | +212 5 22 78 54 08<br>+212 6 61 71 67 74<br>northafrica.tcs@conti.de                                             |
| Norway                          | <b>Continental Dekk Norge</b><br>Rakkestadveien 55<br>1814 Askim, Norway                                                                                                | +47 23 06 80 40<br>tekniskservice@conti.de<br>www.continental.no                                                 |
| Poland                          | <b>Continental Opony Polska Sp. z o.o.</b><br>ul. Zwirki i Wigury 16C, 02-092 Warsaw, Poland                                                                            | +48 22 577-13-00<br>dzial.techniczny@conti.de<br>www.continental-opony.pl                                        |

|                                                                                                  |                                                                                                                                                                             |                                                                                                                                                                                                                                                       |
|--------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Portugal                                                                                         | <b>Continental Pneus (Portugal), S.A.</b><br>Rua Adelino Leitão nº 330 / Apartado 5029 /<br>4761 - 906 EC Lousado, Portugal                                                 | +351 252 490 398<br>servicos.tecnicos@continental.com<br>www.continental-pneus.pt                                                                                                                                                                     |
| Romania<br>(Albania and Kosovo)                                                                  | <b>Continental Automotive Products SRL</b><br>Avram Imbroane 9<br>300129 Timisoara, Romania                                                                                 | +38 62 45 03 429<br>adria.tcs@conti.de<br>www.continental.al                                                                                                                                                                                          |
| Romania /<br>Southeast Europe<br>(TCS Western and<br>Central Romania)                            | <b>Continental Automotive Products SRL</b><br>Avram Imbroane 9<br>300129 Timisoara<br>Romania                                                                               | +40 356 404 524<br>romania.tcs@conti.de<br>www.conti-online.ro                                                                                                                                                                                        |
| Romania<br>(TCS Eastern Romania<br>and Bulgaria)                                                 | <b>Continental Automotive Products SRL</b><br>Avram Imbroane 9<br>300129 Timisoara, Romania                                                                                 | +40 356 404 524<br>romania.tcs@conti.de<br>www.conti-online.ro                                                                                                                                                                                        |
| Saudi Arabia<br>(KSA)                                                                            | <b>Al-Mutiak Continental Tire Saudi Arabia LLC</b><br>Albasateen Square, 2nd Floor - Office No. 107<br>Jeddah - Saudi Arabia                                                | Jeddah: +966 50 46 80 120<br>Riyadh: +966 59 71 37 687<br>Dammam: +966 53 92 33 380<br>ksa.tcs@conti.de<br>www.continental-me.com                                                                                                                     |
| Slovakia                                                                                         | <b>Continental Barum s.r.o.</b><br>Objizdna 1628<br>765 02 Otrokovice, Czech Republic                                                                                       | +420 577 511 111<br>info@barum.cz<br>www.continental.sk                                                                                                                                                                                               |
| South East Europe:<br>Slovenia, Croatia, Serbia,<br>Bosania & Herzegovina,<br>Montenegro, Greece | <b>Continental Adria</b><br>Zagrebška cesta 104<br>2000 Maribor, Slovenia                                                                                                   | +38 62 45 03 429<br>adria.tcs@conti.de<br>www.continental-pnevmatike.si                                                                                                                                                                               |
| Switzerland                                                                                      | <b>Continental Suisse SA</b><br>Lerzenstrasse 19A<br>8953 Dietikon, Switzerland                                                                                             | +41 (0) 44 745 56 00<br>kundendienst.ch@conti.de<br>www.continental-reifen.ch/pkw                                                                                                                                                                     |
| Republic South Africa<br>(RSA)                                                                   | <b>Continental Tyre S.A. (Pty) Ltd.</b><br>6 Cadle Street<br>New Brighton West<br>Port Elizabeth<br>South Africa                                                            | Gauteng: +27 60 503 6545<br>KwaZulu-Natal: +27 83 512 6833<br>Western Cape: +27 60 503 9603<br>Eastern Cape: +27 83 656 9848<br>Contiweb_query@conti.co.za<br>www.continental.co.za<br>www.continental-tyres.co.za/car/<br>contact/contact-technology |
| Spain                                                                                            | <b>Continental Tires Espana, S.L.U.</b><br>P.E. San Fernando de Henares Edificio Munich Avda.<br>Castilla nº2-1ªPlanta B-C<br>E- 28830 San Fernando Henares (Madrid), Spain | +34 91 660 36 27<br>customerservice.es@conti.de<br>www.continental-neumaticos.es/<br>turismo                                                                                                                                                          |
| Sweden                                                                                           | <b>Continental Däck Sverige AB</b><br>Prognosgatan 2<br>S - 50464 Borås, Sweden                                                                                             | +46 200 456 000<br>sweden.tcs@continental.com<br>www.continental-daek.se                                                                                                                                                                              |
| Türkiye                                                                                          | <b>Otomotiv Lastikleri Tevzii A.Ş (OLTAS)</b><br>Küçükbakkalköy Mah. Kayışdağı Cad., Allianz Tower 1/26<br>34750 Ataşehir İstanbul, Türkiye                                 | +90 216 587 00 00<br>hizmet@conti.de<br>www.continental-lastikleri.com.tr                                                                                                                                                                             |
| Ukraine                                                                                          | <b>Continental Opony Polska Sp.z o.o.</b><br>ul. Zwirki i Wigury 16C<br>02-092 Warsaw, Poland                                                                               | +48 538 979 155<br>ukraine.tcs@continental.com<br>www.continental.ua                                                                                                                                                                                  |
| United Kingdom<br>(UK) & Eire                                                                    | <b>Continental Tyre Group Ltd</b><br>Building DC2, Castle Mound Way, Central Park<br>Rugby CV23 0WB, UK                                                                     | +44 1788 566 240<br>administrator.technical@conti.de<br>www.continental-tyres.co.uk                                                                                                                                                                   |

**For general instructions and explanation about technical tyre data see p. 9.**

For specific explanation of footnotes in the table headers on pages 32-79 and 92-101 see here:

#### Passenger car tyres / 4x4 tyres

- 1) Instead of J-rims the same size JK- and JJ-rims may be used.
- 2) Winter tyres can be max. 1 % greater in outer diameter than standard on-road tread patterns.
- 3) Theoretical Circumference calculated based ETRTO Design diameter and rounded to 5 mm
- 3a) Static loaded Radius based on ETRTO Design diameter
- 4) Instead of B-rims, J, JK and JN contour-rim
- 5) The respective B-rims are permitted.
- \*) ZR tyres have no operational code. The LI given for these tyres is only an approx. figure. Ask Continental Customer Services for the actual speed and load capacity.

 Compatible with electric vehicles.

#### Van tyres

- 6) Load Index single / twin fitment and Speed Symbol.
- 7) Fuel efficiency (A-E)
- 8) Wet grip (A-E)
- 9) External rolling noise (Format :grade / value in dB) (A-C)
- 10) S = Single, T = Twin fitment, FA = front axle, RA = rear axle.
- 11) Standard rubber valves are only approved for up to 4.5 bar in service.
- 12) TR 600 XHP and TR 602 HP (ETRTO V3.23.1+2) are reinforced snap-in valves approved for pressures up to 5.5 bar.
- 13) 40 MS (ETRTO V2.04.1, V2.05.1) are metal valves approved for pressures up to 14 bar.

For tyre pressures see "Operating instructions", page 118ff.

